



REVISIONS				
P	DATE	DESCRIPTION	DATE	BY
AI	27JUN2017	REVISED PER ECR-17-009300	LN	RS

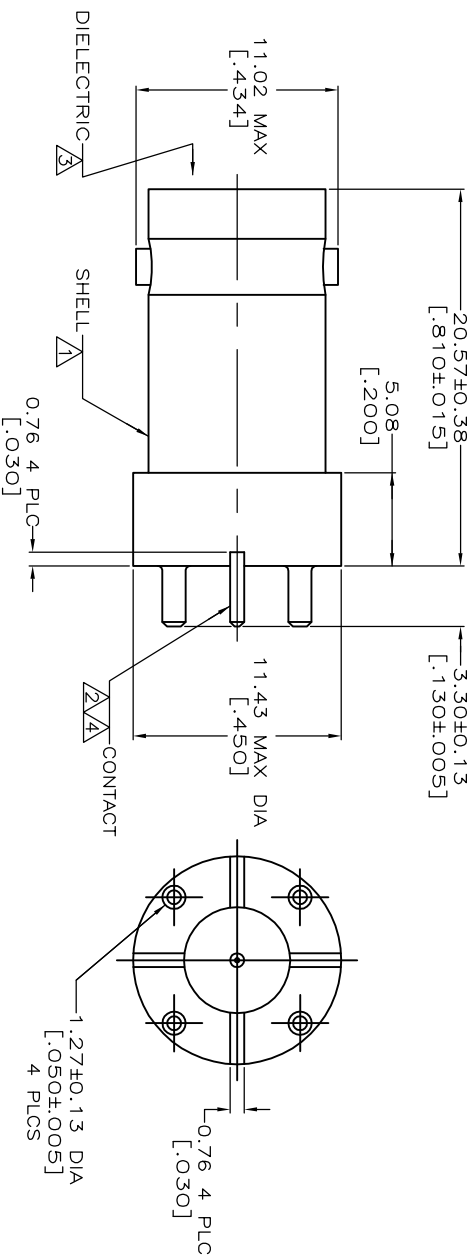

1. ZINC PER QQ-Z-363
2. BERYLLIUM COPPER PER ASTM-B-196
3. PTFE PER MIL-P-19468
4. GOLD PLATE PER MIL-G-45204
0.76 μm [.000030] MINIMUM THICK.
5. TIN PLATE PER ASTM-B-545,
3.04 μm [.000120] MINIMUM THICK.
6. SEE INSTRUCTION SHEET 408-9889.
7. NICKEL PLATE PER QQ-N-290
5.08 μm [.000200] MINIMUM THICK.
8. PACKAGE: 100 PER BAG/CARTON
9. PACKAGE: 28 PER TRAY PACKAGE

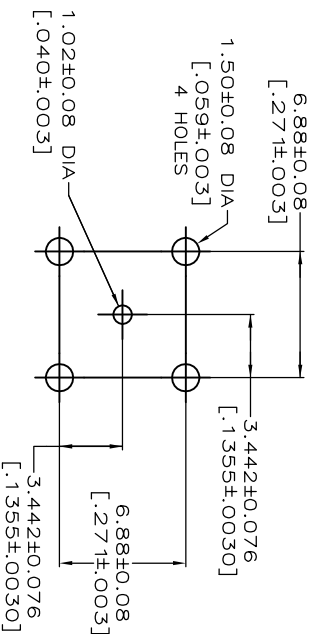

PCB CONFIGURATION

1-6274291-1
6274291-2
6274291-1

SHELL FINISH PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE: 07/28/2005		BY: J. HAVENER	
DIM: VARIELA - D078B2005		CHK: J. HAVENER		DATE: 07/28/2005	
DIMENSIONS:		OTHERWISE SPECIFIED:		NAME: JTE	
NOTES:		TOLERANCES:		TE Connectivity	
1. P.C. ± .005		2. P.C. ± .005		APPRO: J. HAVENER	
3. P.C. ± .005		4. P.C. ± .005		PRODUCT SPEC: 108-12078	
5. P.C. ± .005		6. P.C. ± .005		APPLICATION SPEC: 75 OHM, COMMERCIAL BNC	
7. P.C. ± .005		8. P.C. ± .005		SIZE: A2	
9. P.C. ± .005		10. P.C. ± .005		DATE CODE: 00779	
11. P.C. ± .005		12. P.C. ± .005		DRAWING NO: 6274291	
13. P.C. ± .005		14. P.C. ± .005		RESTRICTED TO: —	
15. P.C. ± .005		16. P.C. ± .005		MATERIAL: 0.000000	
17. P.C. ± .005		18. P.C. ± .005		WEIGHT: 0.000000	
19. P.C. ± .005		20. P.C. ± .005		CUSTOMER DRAWING	
21. P.C. ± .005		22. P.C. ± .005		SCALE: 5:1	
23. P.C. ± .005		24. P.C. ± .005		SHEET: 1	
25. P.C. ± .005		26. P.C. ± .005		REV: A1	