

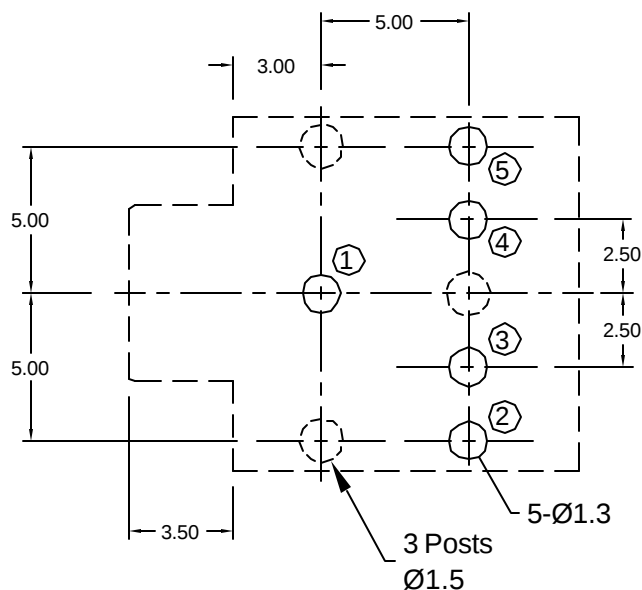


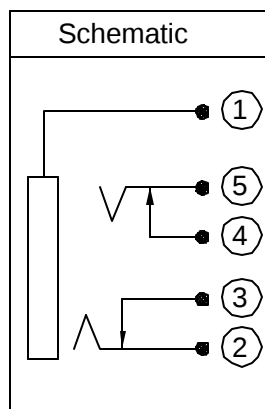

PCB LAYOUT
(BOTTOM VIEW)

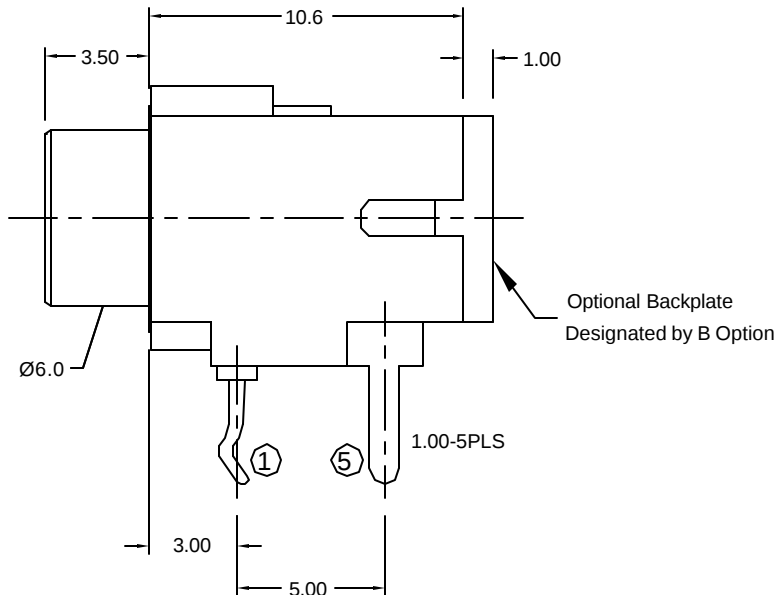

Bushing: Brass, Nickel plated

Durability: 5000 mating cycles

Operating Temp:
-25°C to +80°C



Tolerances
X.X $\pm$ 0.25
X.XX $\pm$ 0.15
Unless Stated
Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	9/6/05	New Drawing	R. Aguirre	H. MA	R. Aguirre	8/15/05
A2	11/8/06	ECO 06-046	R. Aguirre	H. MA		
						UNITS
						mm

STX-3100-5NB-701C

One Single Throw Double Pole Switch, with Backplate



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kycon:](#)

[STX-3100-5NB-701C](#)