

MECL 10,000 LOGIC DIAGRAMS

Numbers in parenthesis denote pin numbers for F package (Case 650).


FUNCTIONS AND CHARACTERISTICS (continued)

Function	Type ①		Propagation Delay ns typ	Power Dissipation mW typ/pkg*	Case
	-30 to +85°C	-55 to +125°C			
Universal Decade Counter	MC10137	MC10537	f = 150 MHz	625	620,650
Bi-Quinary Counter	MC10138	—	f = 150 MHz	370	620
64-Bit Random Access Memory (90 Ω)	MCM10140	—	t _{Access} = 15 (max)	420	620,690
Four-Bit Universal Shift Register	MC10141	MC10541	f = 200 MHz	425	620,648,650
64-Bit Random Access Memory (50 Ω)	MCM10142	—	t _{Access} = 10 (max)	420	620
8 x 2 Multiport Register File (RAM)	MCM10143	—	t _{Access} = 10	610	623
256-Bit Random Access Memory	MCM10144	—	t _{Access} = 30 (max)	420	620,690
64-Bit Register File (RAM)	MCM10145	—	t _{Access} = 10	625	620
128-Bit Random Access Memory	MCM10147	—	t _{Access} = 12 (max)	420	620
64-Bit Random Access Memory (50 Ω)	MCM10148	—	t _{Access} = 15 (max)	420	620
1024-Bit Programmable Read Only Memory	MCM10150	—	t _{Access} = 20	—	690
Quad Latch	MC10153	—	4.0	310	620
12-Bit Parity Generator/Checker	MC10160	MC10560	5.0	320	620,648,650
Binary to 1-8 Decoder (Low)	MC10161	MC10561	4.0	315	620,648,650
Binary to 1-8 Decoder (High)	MC10162	MC10562	4.0	315	620,648,650
Error Detection-Correction Circuit	MC10163	—	5.0	520	620
8-Line Multiplexer	MC10164	MC10564	3.0	310	620,648,650
8-Input Priority Encoder	MC10165	—	7.0	545	620,648
5-Bit Magnitude Comparator	MC10166	—	6.0	440	620
Quad Latch	MC10168	—	3.0	310	620
Dual Binary To 1-4 Decoder (Low)	MC10171	MC10571	4.0	325	620,648,650
Dual Binary To 1-4 Decoder (High)	MC10172	MC10572	4.0	325	620,648,650
Quad 2-Input Multiplexer/Latch	MC10173	—	2.5	275	620,648
Dual 4 To 1 Multiplexer	MC10174	MC10574	3.5	305	620,650
Quint Latch	MC10175	MC10575	2.5	400	620
Hex "D" Master-Slave Flip-Flop	MC10176	—	f = 250 MHz	460	620
Triple MECL to NMOS Translator	MC10177	—	—	1.0 W	620
Binary Counter	MC10178	—	f = 150 MHz	370	620
Look-Ahead Carry Block	MC10179	MC10579	3.0 (Cn,P) 4.0 (G)	300	620,648,650
Dual High Speed Adder/Subtractor	MC10180	MC10580	4.5	360	620,648,650
4-Bit Arithmetic Logic Unit/Function Generator	MC10181	MC10581	See Logic Diag.	600	623,649,652
2-Bit Arithmetic Logic Unit/Function Generator	MC10182	—	See Logic Diag.	575	620
Error Detection-Correction Circuit	MC10193	—	7.5	520	620
Hex Inverter/Buffer	MC10195	—	2.0	200	620
Hex "AND" Gate	MC10197	—	2.8	200	620
High Speed Dual 3-Input 3-Output OR Gate	MC10210	—	1.5	160	620
High Speed Dual 3-Input 3-Output NOR Gate	MC10211	—	1.5	160	620
High Speed Dual 3-Input 3-Output OR/NOR Gate	MC10212	—	1.5	160	620
High Speed Triple Line Receiver	MC10216	MC10616	1.8	100	620,648,650
High Speed Dual Type D Master-Slave Flip-Flop	MC10231	MC10631	f = 225 MHz	270	620,648,650
High Speed 2 x 1 Bit Array Multiplier Block	MC10287	—	—	400	620

① L suffix denotes Dual In-Line Ceramic Package, P suffix denotes Dual In-Line Plastic Package, F suffix denotes flat package (i.e., MC10100L = Ceramic Dual In-Line Package, MC10100P = Plastic Dual In-Line Package and MC10500F = Ceramic Flat Package.)

*Load Power not included

MC10161

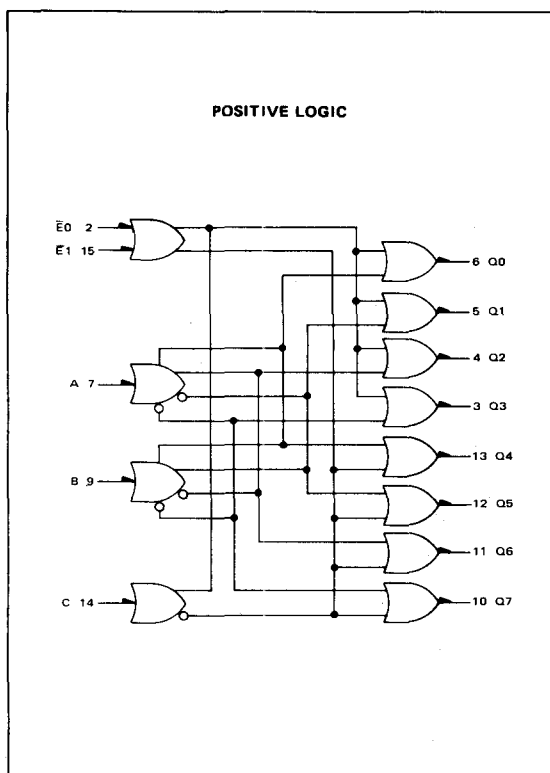

V_{CC1} = Pin 1
 V_{CC2} = Pin 16
 V_{EE} = Pin 8

TRUTH TABLE


[illegible]

ϕ = Don't Care

The MC10161 is designed to decode a three bit input word to a one of eight line output. The selected output will be low while all other outputs will be high. The enable inputs, when either or both are high, force all outputs high. This device has high Z input pulldown resistors and open emitter outputs.

$P_D = 315 \text{ mW typ/pkg (No Load)}$
 $t_{pd} = 4.0 \text{ ns typ}$


Each MECL 10,000 series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 lfm is maintained. Outputs are terminated through a 50-ohm resistor to -2.0 volts. Test procedures are shown for only one input/output combination. Other combinations are tested according to the truth table.

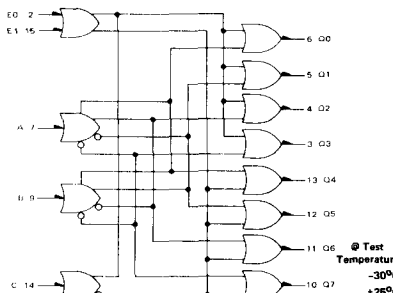

TEST VOLTAGE VALUES						V _{CC} Gnd
(Volts)						
V _{IH} max	V _{IL} min	V _{IHA} min	V _{ILA} max	V _{EE}		
-0.890	-1.890	-1.205	-1.500	-5.2		
-0.810	-1.850	-1.106	-1.475	-5.2		
-0.700	-1.825	-1.035	-1.440	-5.2		
TEST VOLTAGE APPLIED TO PINS LISTED BELOW:						
V _{IH} max	V _{IL} min	V _{IHA} min	V _{ILA} max	V _{EE}		
2.7.9, 14, 15	—	—	—	8	1, 16	
14	—	—	—	8	1, 16	
—	14	—	—	8	1, 16	
2	—	—	—	8	1, 16	
15	—	—	—	8	1, 16	
14	—	—	—	8	1, 16	
—	—	2	—	8	1, 16	
—	—	15	—	8	1, 16	
—	—	14	—	8	1, 16	
—	—	Pulse In	Pulse Out	-3.2 V	2, 10 V	
—	—	14	13	8	1, 16	
—	—	↓	↓	↓	↓	


Characteristic	Symbol	Pin Under Test	MC10161L Test Limits						TEST VOLTAGE APPLIED TO PINS LISTED BELOW						V _{CC} (V _{CD})	
			-30°C		+25°C		+85°C		Unit	V _{IH} max	V _{IL} min	V _{IHA} min	V _{ILA} max	V _{EE}		
			Min	Max	Min	Max	Min	Max								
Power Supply Drain Current	I _E	8	—	—	—	61	76	—	mAdc	2.7, 9, 14, 15	—	—	—	8	1, 16	
Input Current	I _{in}	14	—	—	—	220	—	—	μAdc	14	—	—	—	8	1, 16	
	I _{inL}	14	—	—	0.5	—	—	—	μAdc	—	14	—	—	8	1, 16	
Logic "1" Output Voltage	V _{OH}	13	-1.060	-0.890	-0.960	—	-0.810	-0.890	-0.700	Vdc	2	—	—	—	8	1, 16
		13	-1.060	-0.890	-0.960	—	-0.810	-0.890	-0.700	Vdc	15	—	—	—	8	1, 16
Logic "0" Output Voltage	V _{OL}	13	-1.890	-1.675	-1.850	—	-1.650	-1.825	-1.615	Vdc	14	—	—	—	8	1, 16
Logic "1" Threshold Voltage	VOHA	13	-1.080	—	-0.980	—	—	-0.910	—	Vdc	—	2	—	—	8	1, 16
		13	-1.080	—	-0.980	—	—	-0.910	—	Vdc	—	15	—	—	8	1, 16
Logic "0" Threshold Voltage	VOLA	13	—	-1.655	—	—	-1.630	—	-1.595	Vdc	—	14	—	—	8	1, 16
Switching Times (50 Ω Load)												Pulse In	Pulse Out	-3.2 V	+2.0 V	
Propagation Delay	t ₁₄₋₁₃ t _{14-13†}	13	1.5	6.2	1.5	4.0	6.0	1.5	6.4	ns	—	14	13	8	1, 16	
		13	1.5	6.2	1.5	4.0	6.0	1.5	6.4							
Rise Time (20% to 80%)	t ₁₃₊	13	1.0	3.3	1.1	2.0	3.3	1.1	3.5	↓	—	↓	↓	↓	↓	
Fall Time (20% to 80%)	t ₁₃₋	13	1.0	3.3	1.1	2.0	3.3	1.1	3.5	↓	—	↓	↓	↓	↓	

SWITCHING TIME TEST CIRCUIT AND WAVEFORMS @ 25°C

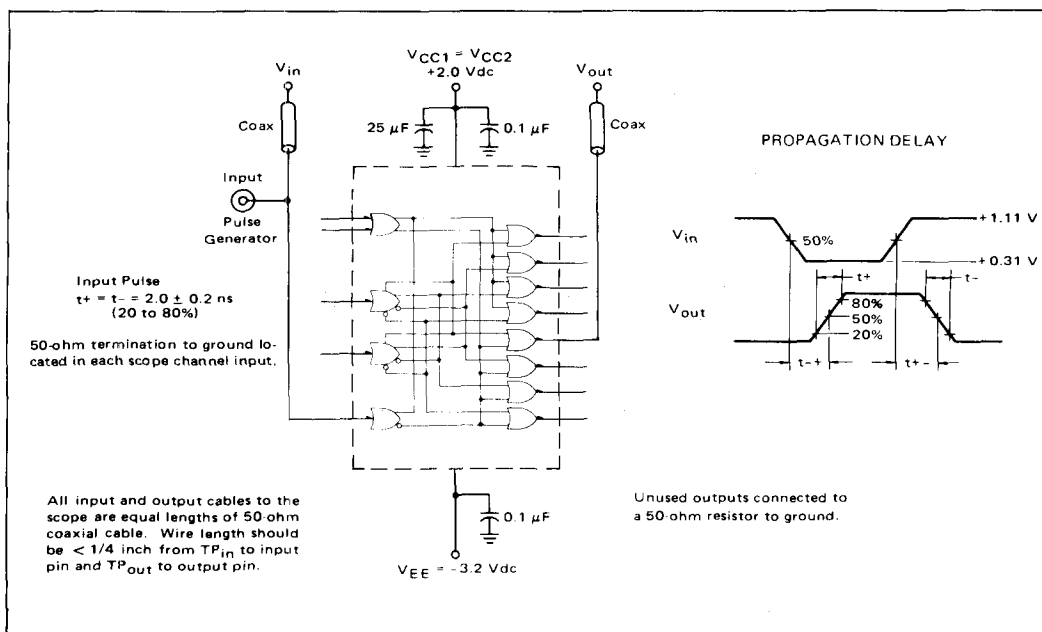

ELECTRICAL CHARACTERISTICS

Each MECL 10,000 series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear fpm is maintained. Outputs are terminated through a 50-ohm resistor to -2.0 volts. Test procedures are shown for only one input/output combination. Other combinations are tested according to the truth table.



P SUFFIX
PLASTIC PACKAGE
CASE 648

Characteristic	Symbol	Pin Under Test	MC10161P Test Limits								TEST VOLTAGE APPLIED TO PINS LISTED BELOW:					(V _{CC}) Gnd	
			-30°C			+25°C			+85°C		Unit	[Volts]					
			Min	Max	Min	Typ	Max	Min	Max	V _{IH} max		V _{IL} min	V _{IHA} min	V _{IHA} max	V _{EE}		
			TEST VOLTAGE APPLIED TO PINS LISTED BELOW:										@ Test Temperature				
Power Supply Drain Current	I _{EE}	8	—	—	—	61	76	—	—	mAdc	2.7, 9, 14, 15	—	—	—	—	8	1, 16
Input Current	I _{inH}	14	—	—	—	—	220	—	—	μAdc	14	—	—	—	—	8	1, 16
	I _{inL}	14	—	—	0.5	—	—	—	—	μAdc	—	14	—	—	—	8	1, 16
Logic "1" Output Voltage	V _{OH}	13	-1.060	-0.890	-0.960	—	-0.810	-0.890	-0.700	Vdc	2	—	—	—	—	8	1, 16
Logic "0" Output Voltage	V _{OL}	13	-1.060	-0.890	-0.960	—	-0.810	-0.890	-0.700	Vdc	15	—	—	—	—	8	1, 16
Logic "1" Threshold Voltage	V _{OHA}	13	-1.890	-1.675	-1.850	—	-1.650	-1.825	-1.615	Vdc	14	—	—	—	—	8	1, 16
Logic "1" Threshold Voltage	V _{OHA}	13	-1.080	—	-0.980	—	—	-0.910	—	Vdc	—	2	—	—	—	8	1, 16
Logic "0" Threshold Voltage	V _{OLA}	13	-1.080	—	-0.980	—	—	-0.910	—	Vdc	—	15	—	—	—	8	1, 16
Logic "0" Threshold Voltage	V _{OLA}	13	—	-1.655	—	—	-1.630	—	-1.595	Vdc	—	—	14	—	—	8	1, 16
Switching Times (50 Ω Load)																	
Propagation Delay	t ₁₄₊₁₃₋ t ₁₄₋₁₃₊	13	—	—	1.5	4.0	6.0	—	—	ns	—		Pulse In	Pulse Out	-3.2 V	+2.0 V	1, 16
Rise Time (20% to 80%)	t ₁₃₊	13	—	—	1.1	2.0	3.3	—	—	↓	—		↓	↓	↓	↓	↓
Fall Time (20% to 80%)	t ₁₃₋	13	—	—	1.1	2.0	3.3	—	—	↓	—		↓	↓	↓	↓	↓

APPLICATION INFORMATION

The MC10161 is a true parallel decoder. No series gating is used internally, eliminating unequal delay times found in other decoders. This design provides the identical 4 ns delay from any address or enable input to any output.

A complete mux/demux operation on 16 bits for data distribution is illustrated in Figure 1. This system, using the MC10136 control counters, has the capability of incrementing, decrementing or holding data channels. When both S0 and S1 are low, the index counters reset, thus initializing both the mux and demux units. The four binary outputs of the counter are buffered by the MC10101s to send twisted-pair select data to the multiplexer/demultiplexer units.

FIGURE 1 - HIGH SPEED 16-BIT MULTIPLEXER/DEMULTIPLEXER

