
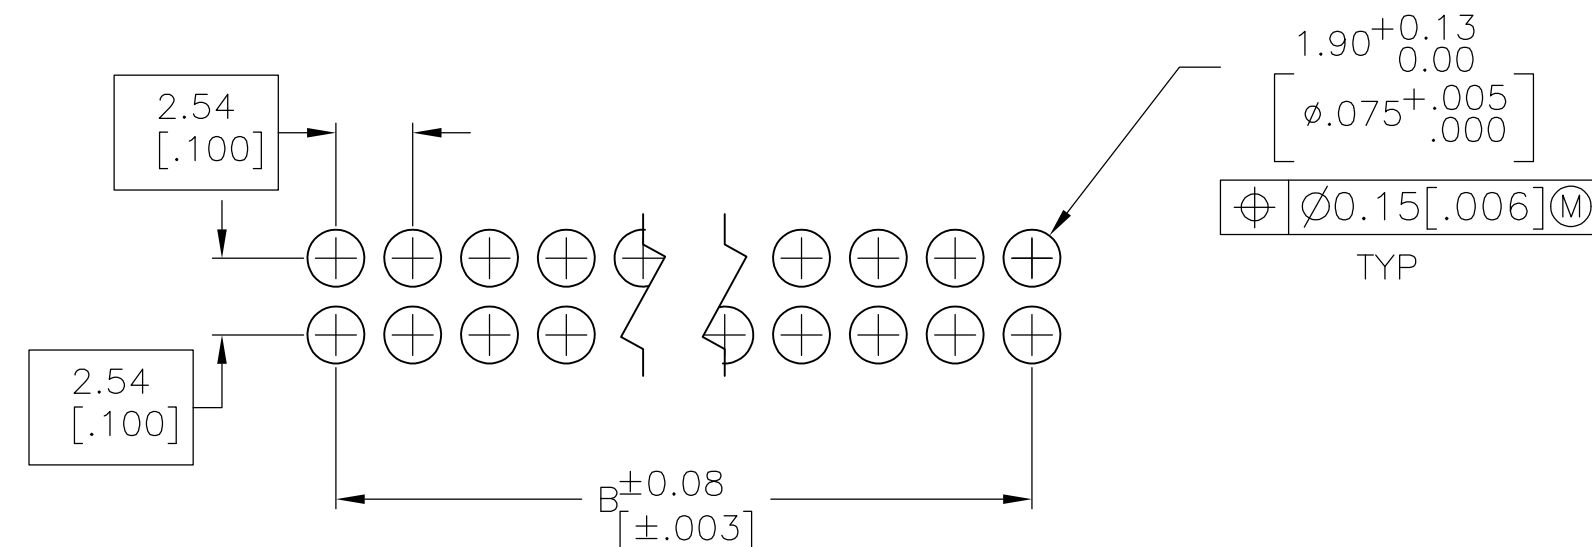
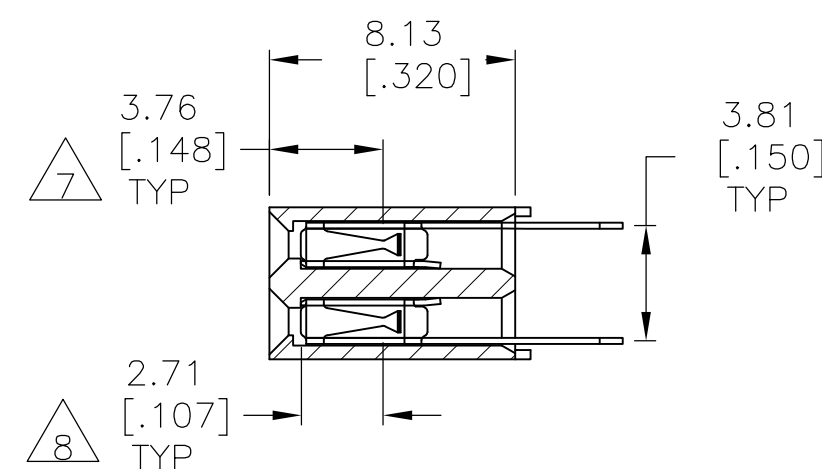




RECOMENDED HOLE LAYOUT
FOR BOTTOM ENTRY OR PASS
THROUGH APPLICATIONS

- ① TE CONNECTIVITY LOGO AND CSA LOGO ARE MOLDED INTO THE HOUSING.
- ② TOLERANCE NON-CUMULATIVE.
- ③ DUPLEX PLATED: 0.00076 (.000030) GOLD IN CONTACT AREA, .00381-.00762 (.000150-.000300) BRIGHT TIN-LEAD ON LEADS, ALL OVER 0.00127 (.000050) MIN NICKEL.
- ④ THESE DIMENSIONS PERTAIN TO CAVITY C/L'S ONLY, NOT TO CONTACT LOCATIONS.
- ⑤ NO PART NUMBER MARKING REQUIRED ON THIS PART NUMBER.
- ⑥ HOUSING: FLAME RETARDANT GLASS FILLED POLYESTER - BLACK.
CONTACTS: PHOS. BRONZE.
- ⑦ POINT OF CONTACT DIMENSION.
- ⑧ POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE CONTACT BEAMS).
- ⑨ DUPLEX PLATED: 0.00076 (.000030) GOLD DUPLEX IN CONTACT AREA, 0.00381-0.00762 (.000150-.000300) MATTE TIN ON LEADS, ALL OVER 0.00127 (.000050) MIN NICKEL.
- ⑩ ROHS 2002/95/EC COMPLIANT
- ⑪ PART NUMBER AND DATE CODE ARE MARKED IN APPROXIMATE LOCATION SHOWN.
- ⑫ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. BOLES 19-11-92 CHK T. KINSEY 19-11-92 APVD —		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .005 4 PLC ± — ANGLES ± —		NAME ASSEMBLY, MOD II DOUBLE ROW, .100 X .100 C/L, VERTICAL MOUNTED, CLOSED ENTRY, SHORT PT. CONTACTS	
		PRODUCT SPEC 108-25026 APPLICATION SPEC 114-25018		SIZE A2	
MATERIAL 		WEIGHT —		CAGE CODE 00779	
FINISH 		DRAWING NO C-534236		RESTRICTED TO —	
CUSTOMER DRAWING				SCALE 4:1	SHEET 1 of 2
				REV	V2

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOCAD

DIST00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

FINISH	A	B	NO OF POSN	PART NO.
5	9	1.300	1.200	26
9	4.000	3.900	80	9-534236-0
9	3.900	3.800	78	8-534236-9
9	3.800	3.700	76	8-534236-8
9	3.700	3.600	74	8-534236-7
9	3.600	3.500	72	8-534236-6
9	3.500	3.400	70	8-534236-5
9	3.400	3.300	68	8-534236-4
9	3.300	3.200	66	8-534236-3
9	3.200	3.100	64	8-534236-2
9	3.100	3.000	62	8-534236-1
9	3.000	2.900	60	8-534236-0
9	2.900	2.800	58	7-534236-9
9	2.800	2.700	56	7-534236-8
9	2.700	2.600	54	7-534236-7
9	2.600	2.500	52	7-534236-6
9	2.500	2.400	50	7-534236-5
9	2.400	2.300	48	7-534236-4
9	2.300	2.200	46	7-534236-3
9	2.200	2.100	44	7-534236-2
9	2.100	2.000	42	7-534236-1
9	2.000	1.900	40	7-534236-0
9	1.900	1.800	38	6-534236-9
9	1.800	1.700	36	6-534236-8
9	1.700	1.600	34	6-534236-7
9	1.600	1.500	32	6-534236-6
9	1.500	1.400	30	6-534236-5
9	1.400	1.300	28	6-534236-4
9	1.300	1.200	26	6-534236-3
9	1.200	1.100	24	6-534236-2
9	1.100	1.000	22	6-534236-1
9	1.000	.900	20	6-534236-0
9	.900	.800	18	5-534236-9
9	.800	.700	16	5-534236-8
9	.700	.600	14	5-534236-7
9	.600	.500	12	5-534236-6
5	9	.500	10	5-534236-5
5	9	.400	8	5-534236-4
5	9	.300	6	5-534236-3
5	9	.200	4	5-534236-2
5	9	.100	-	2
5	9	.100	-	2

FINISH	A	B	NO OF POSN	PART NO.
5	12	1.300	1.200	26
12	3	4.000	3.900	80
3	3.900	3.800	78	4-534236-0
3	3.800	3.700	76	3-534236-9
3	3.700	3.600	74	3-534236-8
3	3.600	3.500	72	3-534236-7
3	3.500	3.400	70	3-534236-6
3	3.400	3.300	68	3-534236-5
3	3.300	3.200	66	3-534236-4
3	3.200	3.100	64	3-534236-3
3	3.100	3.000	62	3-534236-2
3	3.000	2.900	60	3-534236-1
3	2.900	2.800	58	3-534236-0
3	2.800	2.700	56	3-534236-9
3	2.700	2.600	54	3-534236-8
3	2.600	2.500	52	3-534236-7
3	2.500	2.400	50	3-534236-6
3	2.400	2.300	48	3-534236-5
3	2.300	2.200	46	3-534236-4
3	2.200	2.100	44	3-534236-3
3	2.100	2.000	42	3-534236-2
3	2.000	1.900	40	3-534236-1
3	1.900	1.800	38	3-534236-0
3	1.800	1.700	36	3-534236-9
3	1.700	1.600	34	3-534236-8
3	1.600	1.500	32	3-534236-7
3	1.500	1.400	30	3-534236-6
3	1.400	1.300	28	3-534236-5
3	1.300	1.200	26	3-534236-4
3	1.200	1.100	24	3-534236-3
3	1.100	1.000	22	3-534236-2
3	1.000	.900	20	3-534236-1
3	.900	.800	18	3-534236-0
3	.800	.700	16	3-534236-9
3	.700	.600	14	3-534236-8
3	.600	.500	12	3-534236-7
3	.500	.400	10	3-534236-6
3	.400	.300	8	3-534236-5
3	.300	.200	6	3-534236-4
3	.200	.100	4	3-534236-3
3	.100	-	2	3-534236-2
3	.100	-	2	3-534236-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± .005

4 PLC ± -

ANGLES ± -

MATERIAL

6

TOLERANCES UNLESS OTHERWISE SPECIFIED:

FINISH

39

DWN R. BOLES 19-11-92

CHK T. KINSEY 19-11-92

APVD -

PRODUCT SPEC 108-25026

APPLICATION SPEC 114-25018

WEIGHT -

CUSTOMER DRAWING

NAME

ASSEMBLY, MOD II DOUBLE ROW,
.100 X .100 C/L, VERTICAL MOUNTED,
CLOSED ENTRY, SHORT PT. CONTACTS

SIZE A2

CAGE CODE 00779

DRAWING NO C=534236

RESTRICTED TO -

SCALE 4:1

SHEET 2 OF 2

REV V2

1471-9 (3/11)