



STRIP MATERIAL NUMBER	FINISH
84524-0008	OVERALL NICKEL 80μ" MINIMUM
84524-0016	SELECTIVE HARD GOLD 30μ" MINIMUM OVER NICKEL 50μ" MINIMUM

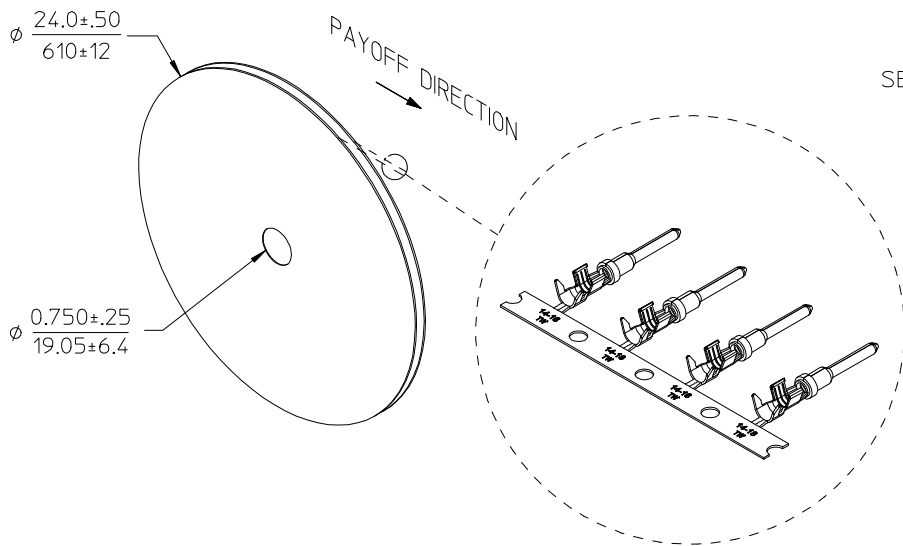

WIRE INSULATION O.D. RANGE $\frac{.075-.130}{1.90-3.30}$

NOTES:

1. MATERIAL: COPPER ALLOY .0118/0.300 THICK.
2. FINISH: SEE CHART.
3. STRIP PARTS ARE REELED 3000 PARTS PER REEL AS SHOWN ABOVE.
4. TERMINAL FOR USE ON XRC CONNECTOR ASSEMBLIES
5. ALL MATERIALS AND FINISHES ARE ROHS COMPLIANT.
6. TERMINALS COMPLY WITH SECTION 5.3.2 OF THE SAE J1939-11 STANDARD FOR SURFACE VEHICLE RECOMMENDED PRACTICE.

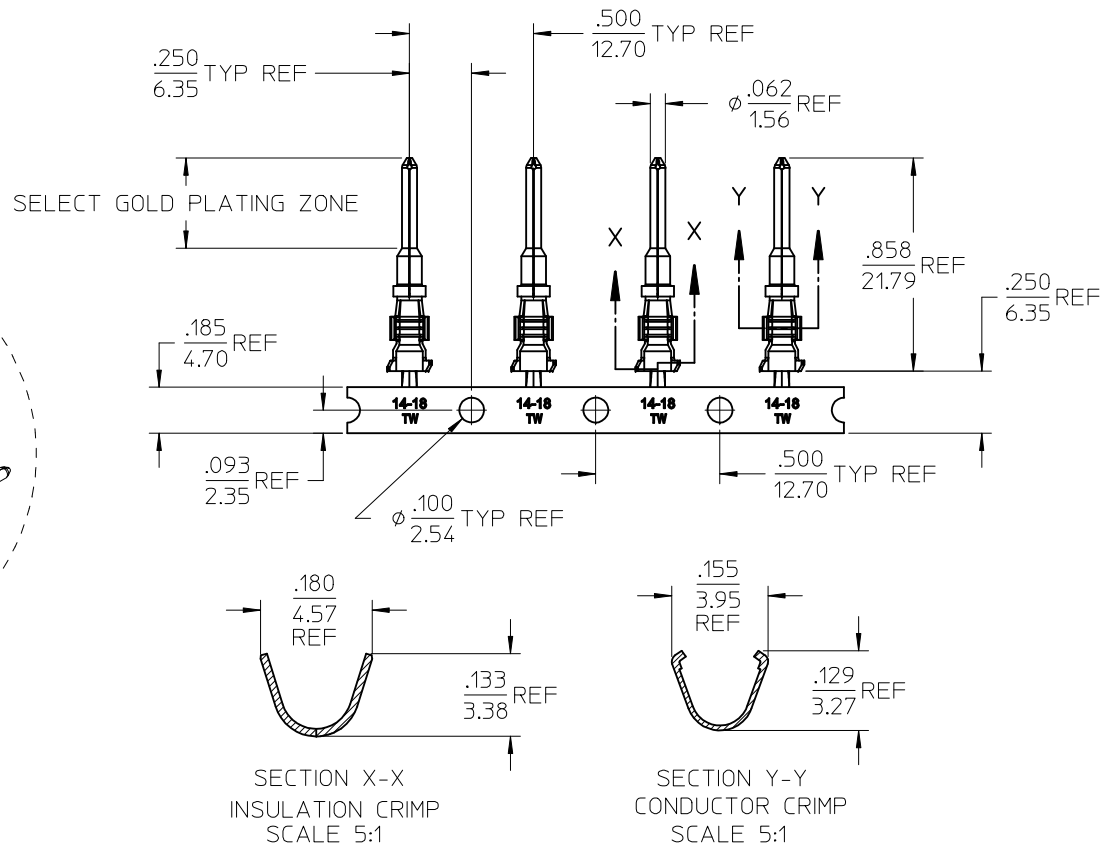

6. TERMINALS COMPLY WITH SECTION 5.3.2 OF THE SAE J1939-11 STANDARD FOR SURFACE VEHICLE RECOMMENDED PRACTICE.	ADD NOTE EC NO: IP00000000 DRAWN: WLEUNG CHKD: KJ02WIK APPR: JFMURPHY	REV	C	GENERAL TOLERANCES (UNLESS SPECIFIED)		DATE 2010/10/13		MOLEX INCORPORATED	
				ANGULAR ± --- °		MATERIAL NO.		DOCUMENT NO.	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-84524-002	
						SHEET NO.		1 OF 1	
						SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	