
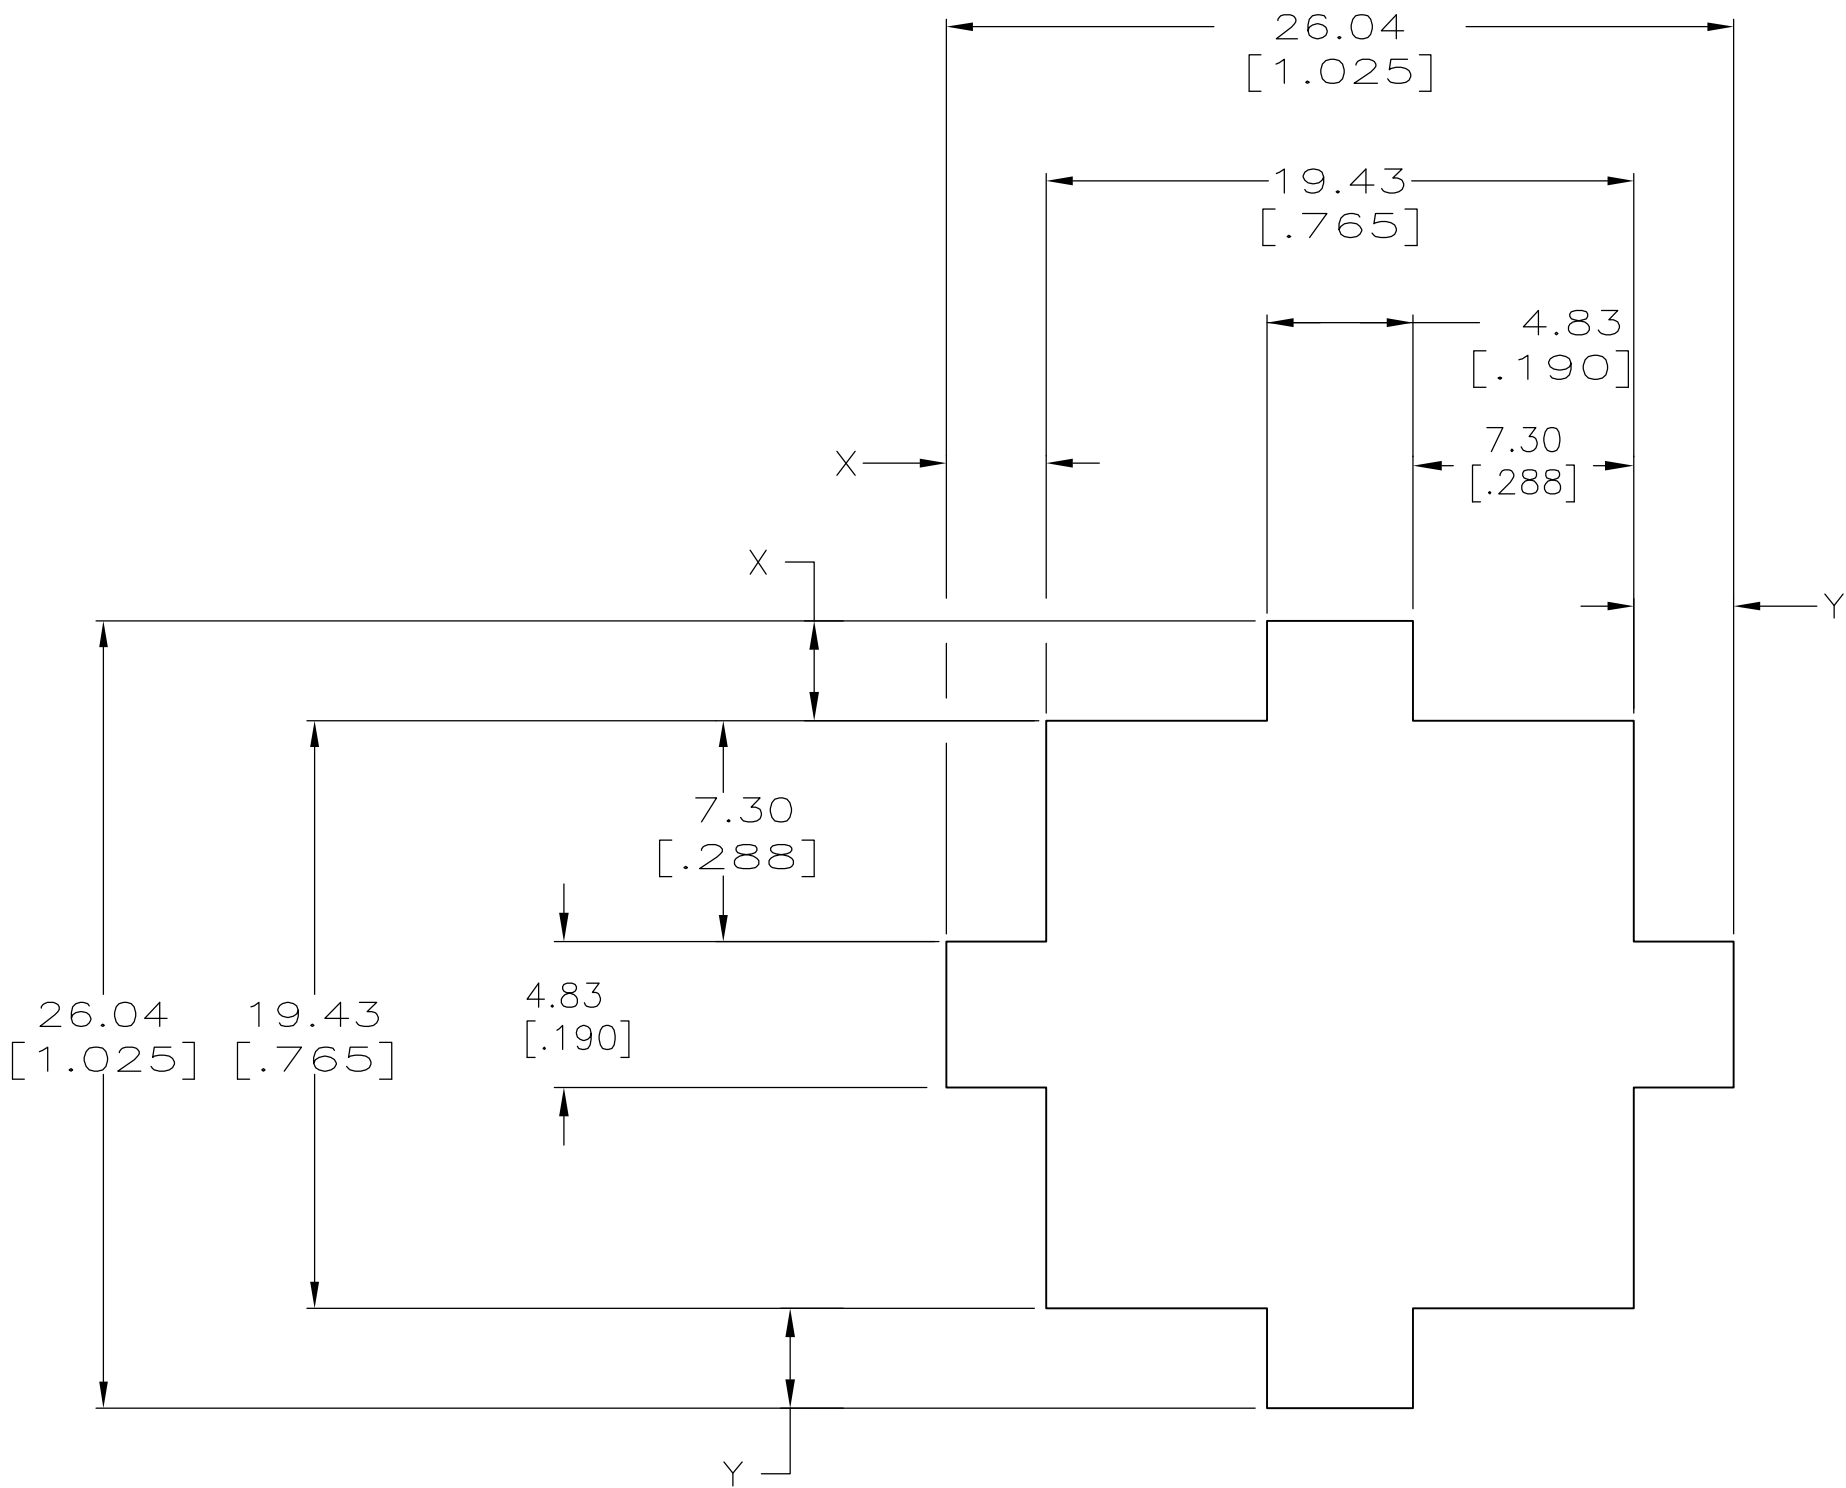
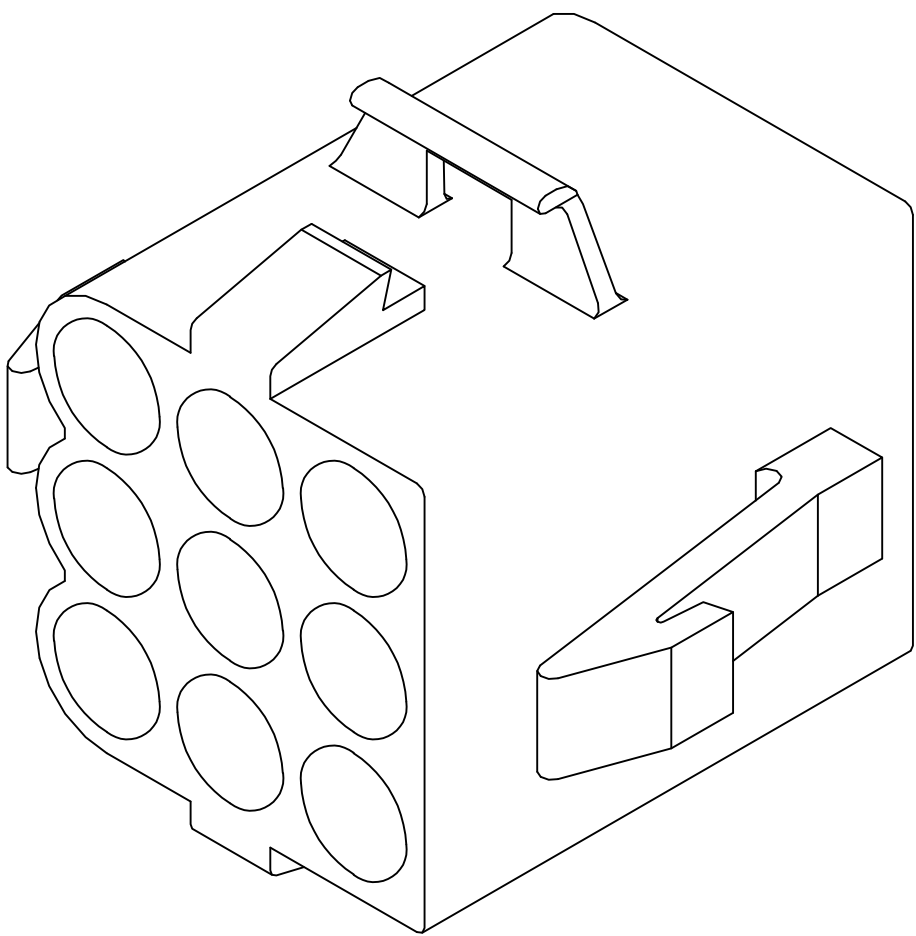
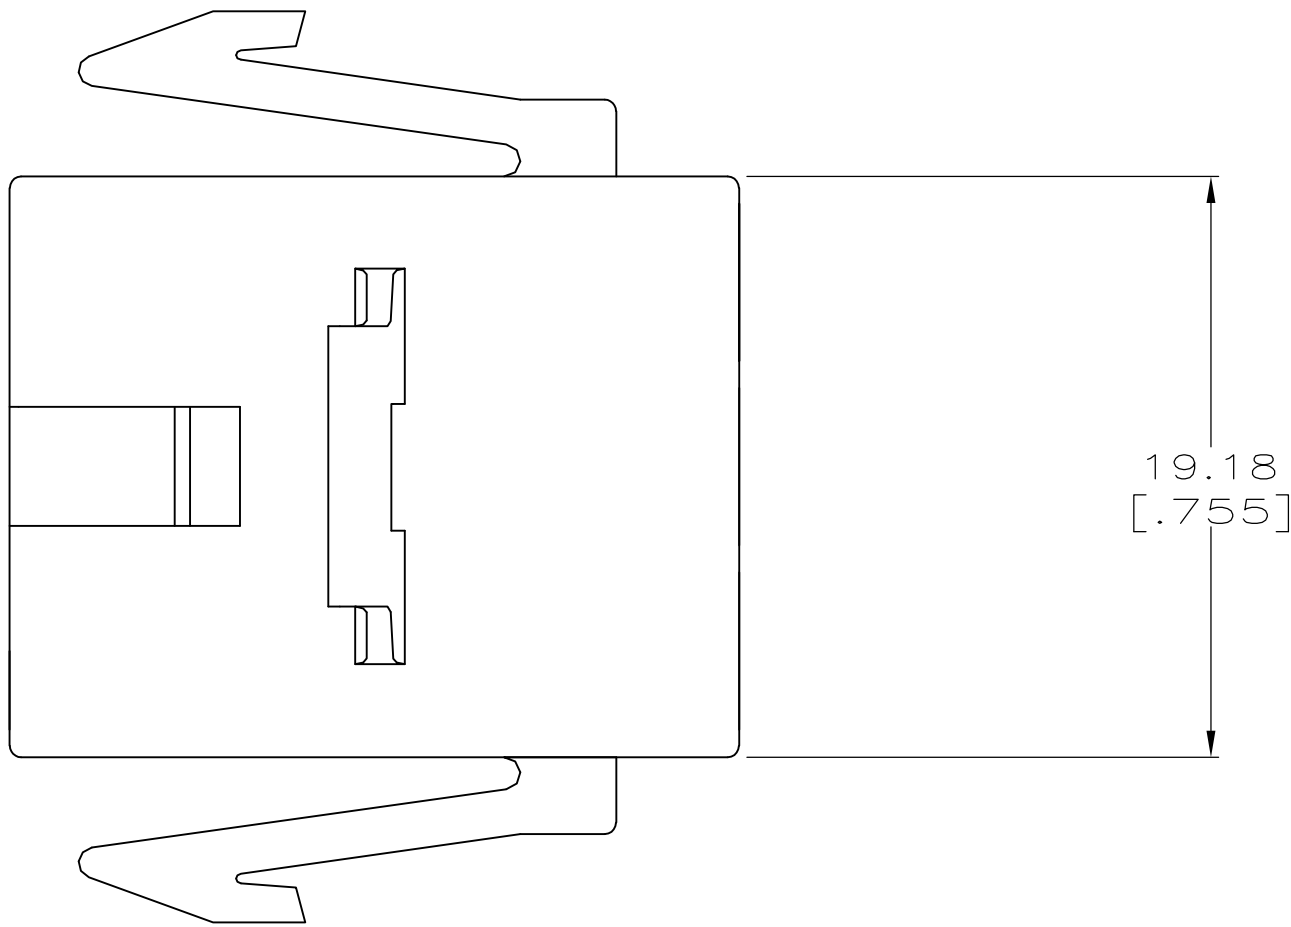
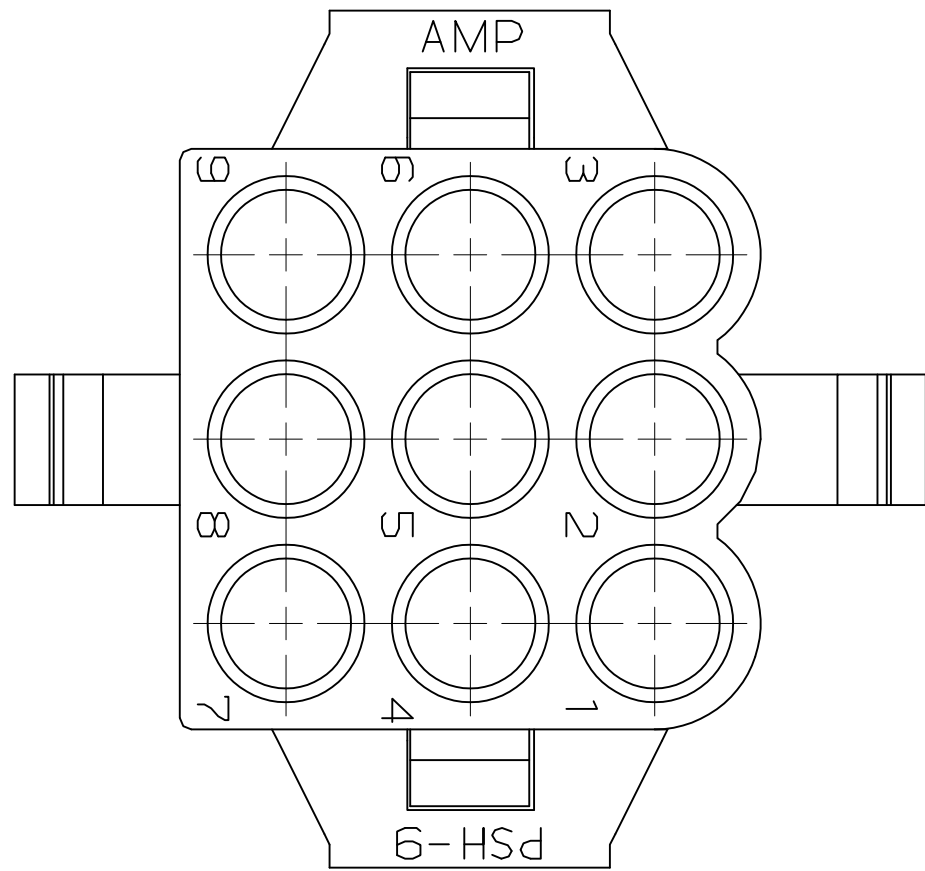
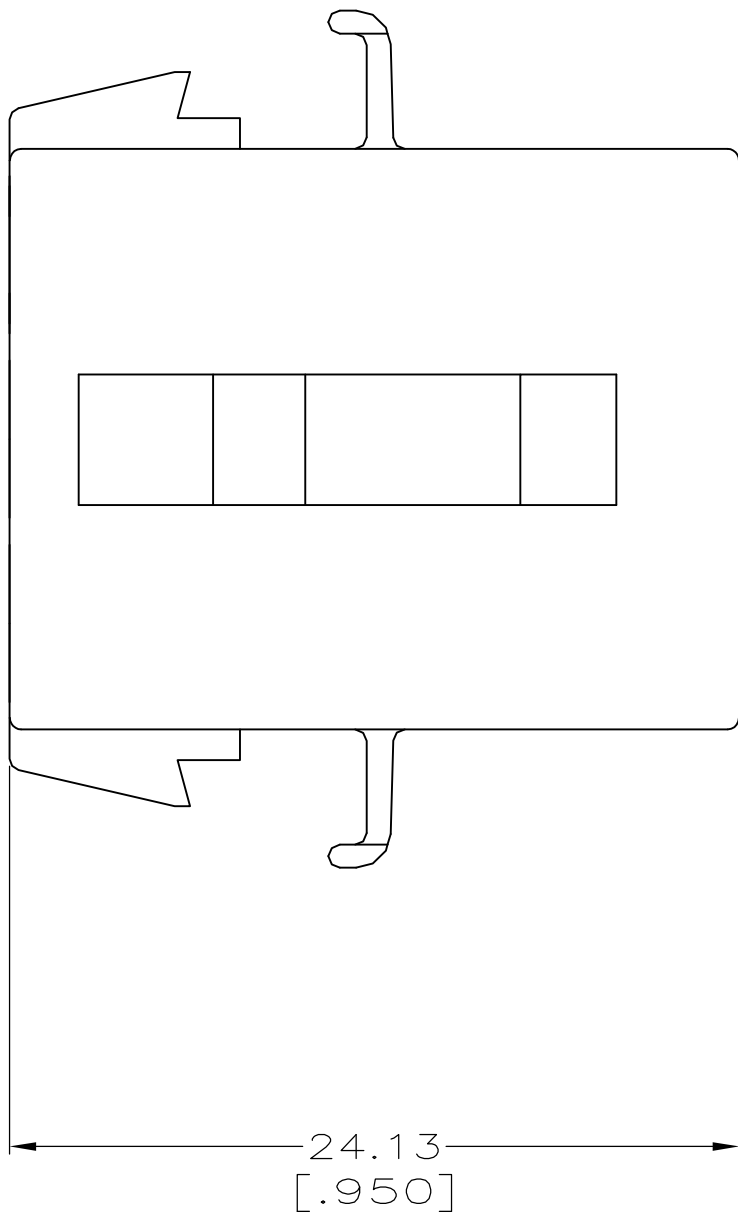


LOC		DIST		REVISIONS				
CM	0	P	LTR	DESCRIPTION		DATE	DWN	APVD
		H1		REVISED PER ECO-11-005027		11MAR11	RK	HMR


1. PANEL THICKNESS – 1.02[.040] – 1.78[.070].
- ⚠

X & Y TO BE EQUAL WITHIN 0.13[.005].
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING AND THE PUNCH ENTER THE PANEL IN THE SAME DIRECTION.

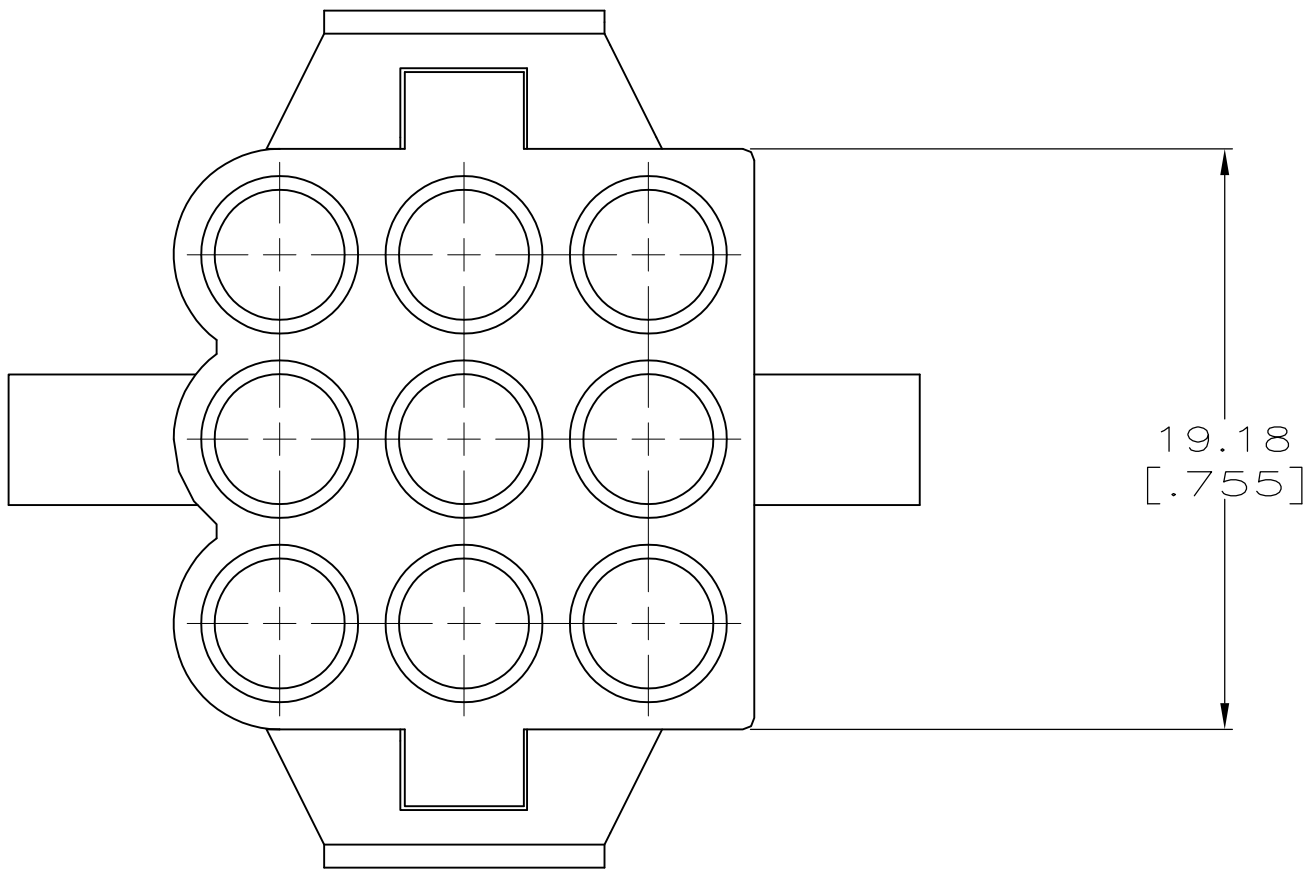

RECOMMENDED PANEL CUT OUT FOR PLUG

BLACK	1-480672-9
YELLOW	1-480672-4
BROWN	1-480672-1
NATURAL	1-480672-0
COLOR	PART NUMBER

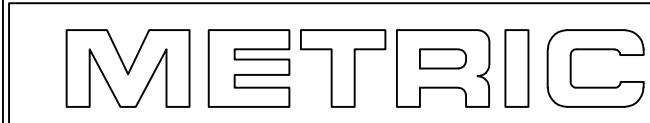

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	06-JAN-2000	TE Connectivity	
		CHK S. RIDGILL	06-JAN-2000		
DIMENSIONS: mm [INCHES]		APVD S. RIDGILL	06-JAN-2000	NAME	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PLUG, 9 CIRCUIT, .140 MATE-N-LOK(TM)	
		0. PLC ± -		PRODUCT SPEC	
		1. PLC ± -		APPLICATION SPEC	
		2. PLC ± 0.13[.005]		SIZE	
		3. PLC ± -		CAGE CODE	
		4. PLC ± -		DRAWING NO	
		ANGLES ± 0°30'		RESTRICTED TO	
MATERIAL NYLON, UL94-V2		FINISH -		A100779C=480672	
				CUSTOMER DRAWING	
				SCALE 4:1	
				SHEET 1 OF 1	
				REV H1	