

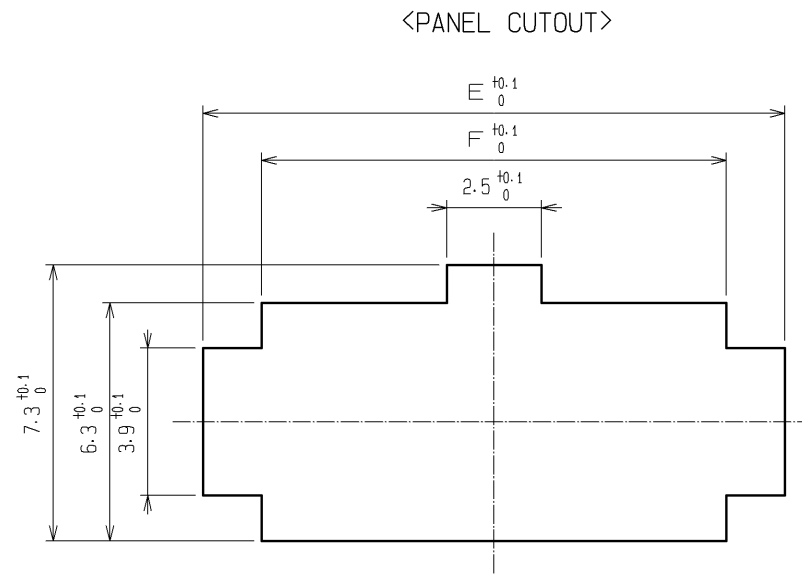
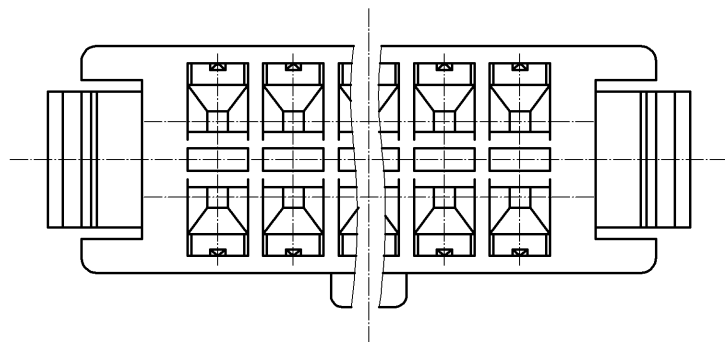
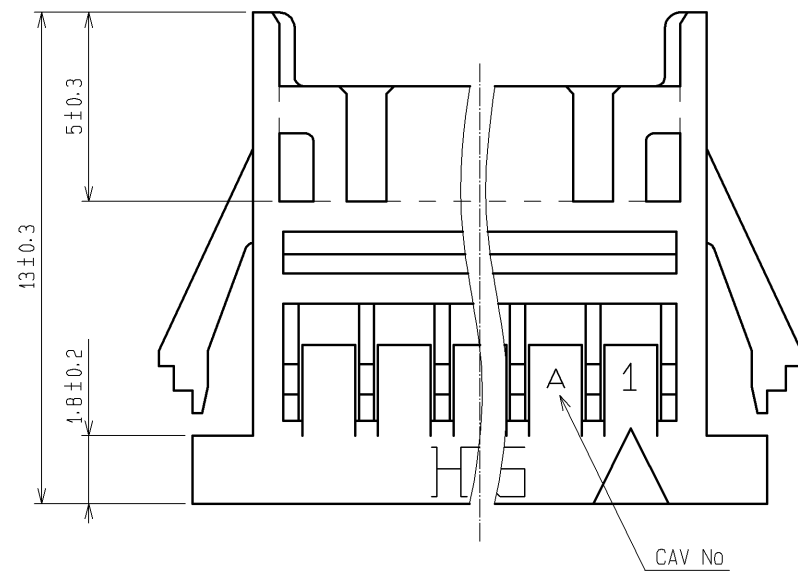
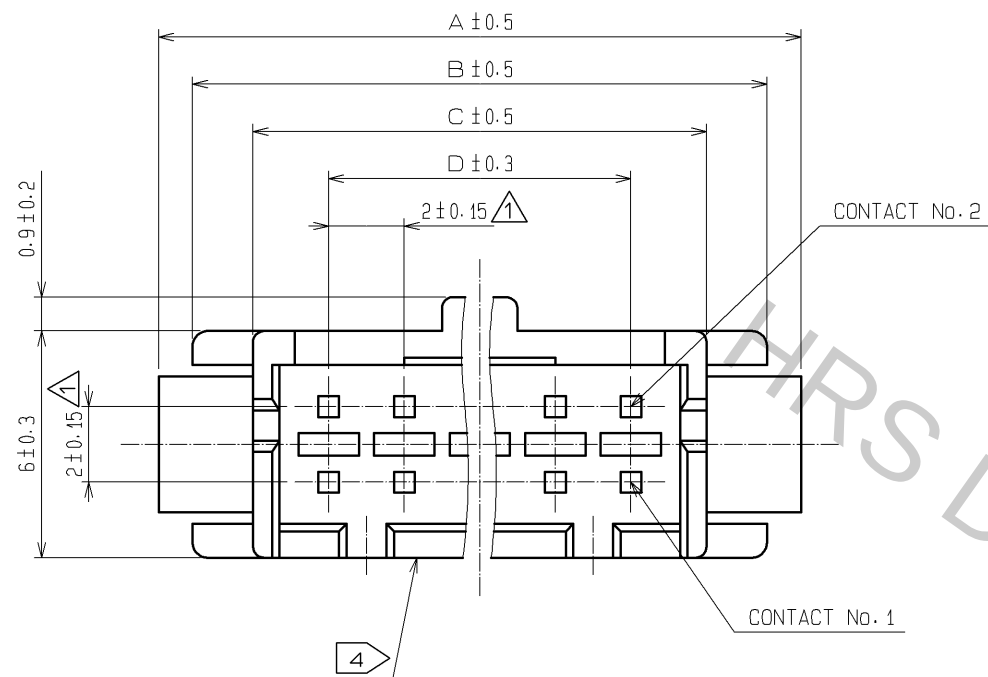




NUMBER OF CONTACT	HRS No.	A	B	C	D	E	F
4	CL543-0619-5	11.0	9.2	6.0	2.0	9.4	6.3
6	CL543-0620-4	13.0	11.2	8.0	4.0	11.4	8.3
8	CL543-0621-7	15.0	13.2	10.0	6.0	13.4	10.3
10	CL543-0622-0	17.0	15.2	12.0	8.0	15.4	12.3
12	CL543-0623-2	19.0	17.2	14.0	10.0	17.4	14.3
14	CL543-0624-5	21.0	19.2	16.0	12.0	19.4	16.3
16	CL543-0625-8	23.0	21.2	18.0	14.0	21.4	18.3
18	CL543-0626-0	25.0	23.2	20.0	16.0	23.4	20.3
20	CL543-0627-3	27.0	25.2	22.0	18.0	25.4	22.3
22	CL543-0628-6	29.0	27.2	24.0	20.0	27.4	24.3
24	CL543-0629-9	31.0	29.2	26.0	22.0	29.4	26.3
26	CL543-0630-8	33.0	31.2	28.0	24.0	31.4	28.3
28	CL543-0631-0	35.0	33.2	30.0	26.0	33.4	30.3
30	CL543-0632-3	37.0	35.2	32.0	28.0	35.4	32.3
32	CL543-0633-6	39.0	37.2	34.0	30.0	37.4	34.3

- NOTE 1> PLEASE USE THE NON-RADIUS SIDE FOR THE PANEL HOOKING AREA.
2. APPLICABLE PANEL THICKENING IS 1.6 TO 1.0mm.
(A SLIGHT DEVIATION WILL OCCUR FOR THE THICKNESS EXCEPT FOR 1.6 AND 1.2mm.)
3. LENGTH OF MATING WITH 'DF11-DC-2C' IS 15.3mm.
4> THE WALL IN CENTER DOESN'T EXIST FOR 4 AND 6 CONTACTS.

NO.		MATERIAL		FINISH , REMARKS		1	PORYAMIDE		UL94V-0(BLACK)		
NO.		MATERIAL		FINISH , REMARKS							
UNITS mm			SCALE 5 : 1		COUNT 3	DESCRIPTION OF REVISIONS DIS-H-004178			DESIGNED YK. NAKATSU	CHECKED TS. FUKUSHIMA	DATE 09.09.14
 HIROSE ELECTRIC CO., LTD.			APPROVED :KJ. KATAYOSE			05.01.05	DRAWING NO.	EDC3-081880-01			
			CHECKED :TY. OMA			05.01.05	PART NO.	DF11- * DEP-2C			
			DESIGNED :IO. DENPOUYA			05.01.05	CODE NO.	CL543-			
			DRAWN :IO. DENPOUYA			05.01.05					
				1							