

4

3

2

1

D

D

C




C

B

B

A

A

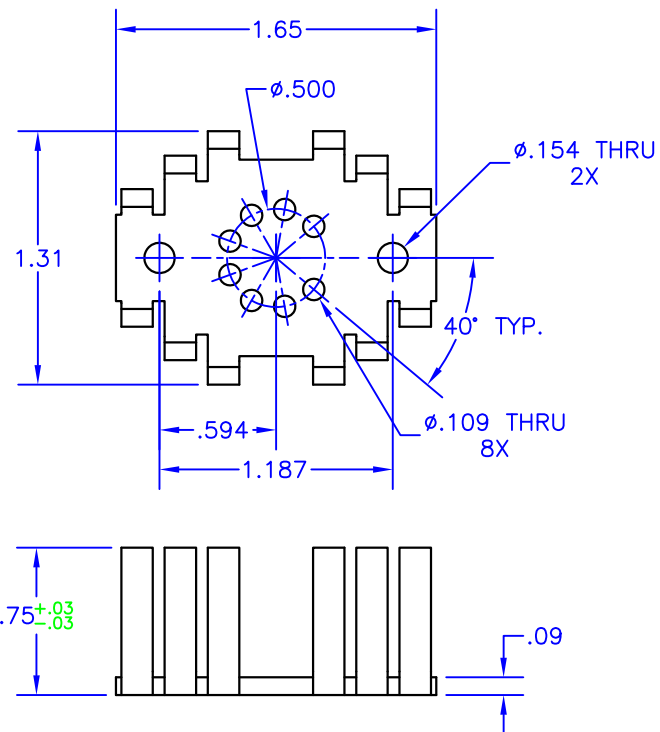

NOTES:

1. Unless otherwise noted, all dimensions are in inches.
2. Break all sharp edges, de-burr & remove loose chips.
3. Material: Aluminum alloy.
4. Finish: Anodize per MIL-A-8625, Type II, Class 2, Black
Typical breakdown voltage > 300V.
5. Mark with contrasting ink as shown, if specified by P.O.
6. Approximate Weight: 0.4 oz [11g].
7. Vendor: Aavid Thermalloy Extrusion 329241.

TOLERANCES - UNLESS
OTHERWISE SPECIFIED

.XX = $\pm .05$ [.002]
.XXX = $\pm .005$ [.0002]
ANG. = $\pm 2^\circ$



TITLE:

HEATSINK, T03

SUBJECT:

MECHANICAL DRAWING

ENGINEER:
D-M

DRAWN BY:
P.ECK

DCA: 12434

SPL 1 OF 1

MODEL:

HS09

FILENAME: HS09

REV: E

DATE: 14NOV12

4

3

2

1