

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

変更

P

LTR

DESCRIPTION

ECN

DATE

DWN

APVD

0

RELEASED

FJ00-1977-00

08FEB01

DM

NS

01

REVISED

FJA0-0242-04

14APR04

AY

KB

1. INSTRUCTION SHEET ; 411-5933
2. DOUBLE LOCK SHOULD BE SET TO THE PRE-ASSEMBLY POSITION WITHIN THE PLUG HOUSING WHEN SHIPPED TO THE CUSTOMER.
3. DETAILS OF CAVITY ; SEE TABLE I

1. 取扱説明書 ; 411-5933
2. ダブルロックは、仮係止状態で出荷される。
3. キャビティ構成は、TABLE - I 参照。

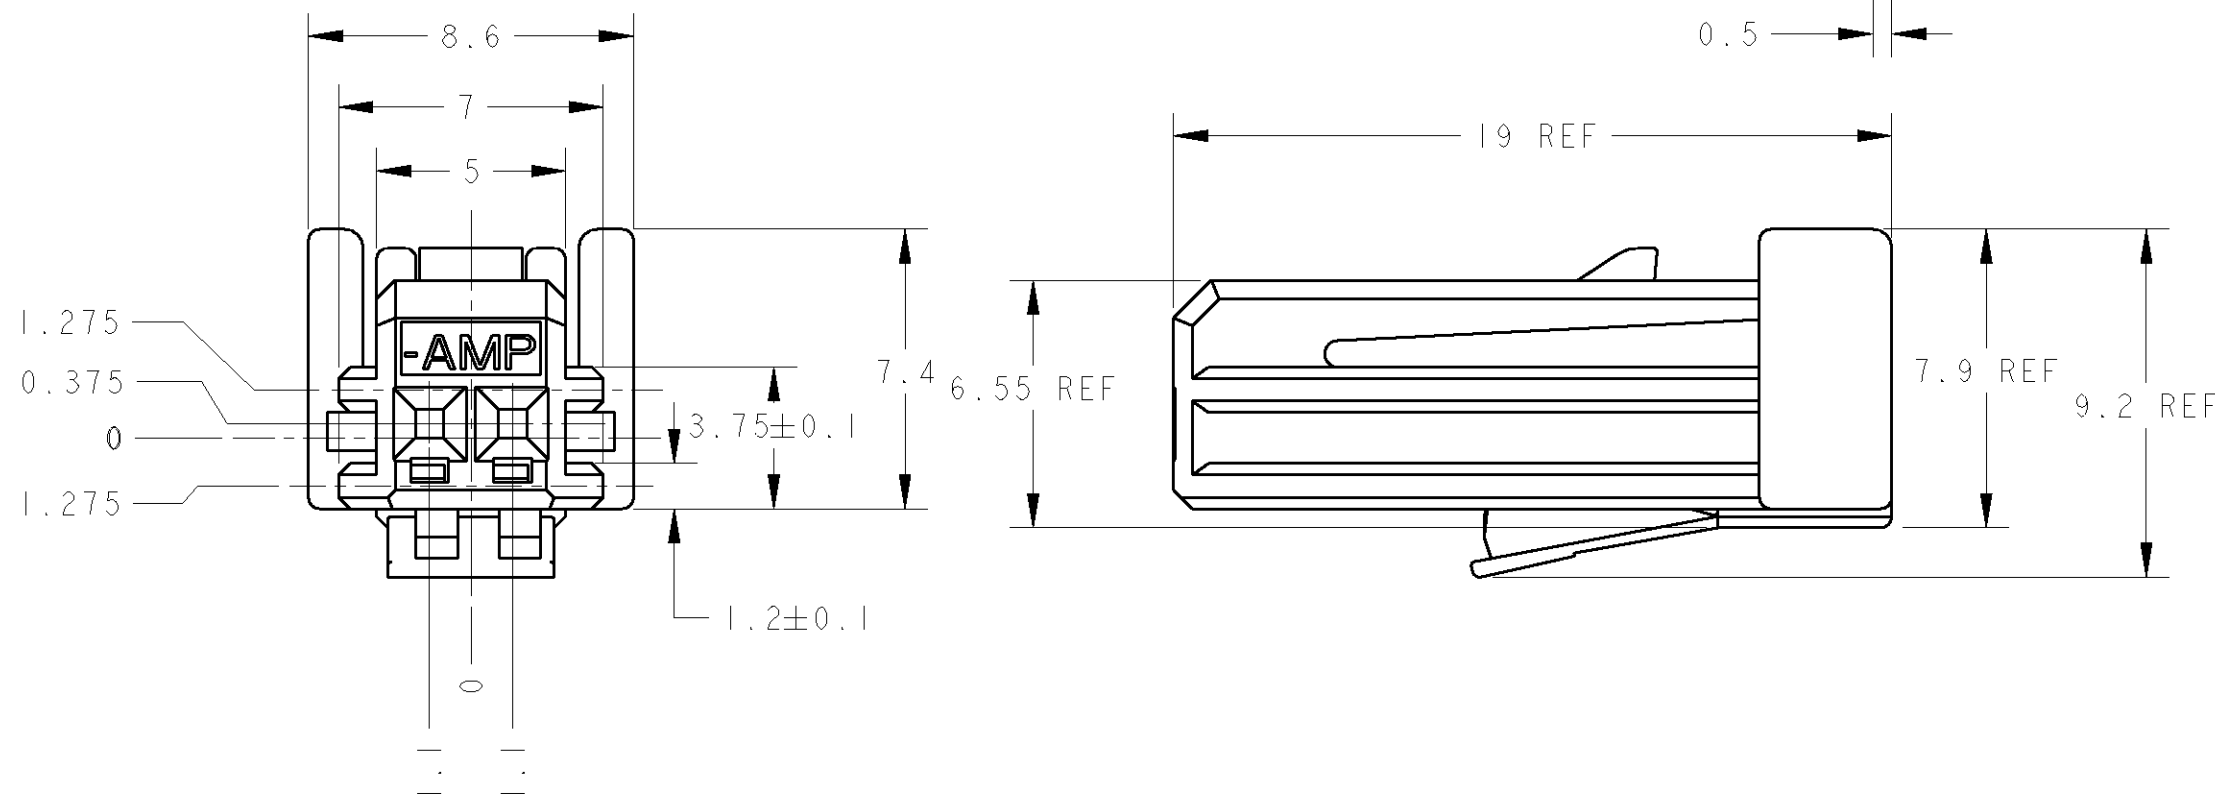



TABLE - I

	FINISH 仕上	POS 極数	APPLIED TERMINAL AMP P/N 適用端子	APPLICABLE WIRE RANGE 適用電線
SIGNAL 025	TIN	2	1123343-1	CAVS 0.22-0.5mm ² AVSS,CAVUS 0.3-0.5mm ² AVSSH-f 0.3-0.5mm ²

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.DIMENSIONS:
単位: 概
mmMATERIAL
材料

PBT GF15

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
±0.3

0 PLC	±
1 PLC	±0.1
2 PLC	±0.01
3 PLC	±0.001
4 PLC	±0.0001
ANGLES	±3'00"

FINISH
仕上

SEE TABLE

DWN 07-Nov-00

D.MATSUURA

CHK 07-Nov-00

T.KOHNO

APVD 07-Nov-00

N.SAI

PRODUCT SPEC

108-5675

APPLICATION SPEC

114-5250

WEIGHT

0.61g

CUSTOMER DRAWING

WIRE RANGE
包合電線断面積

-

INSULATION DIA
被覆外径

-

tyco
ElectronicsTyco Electronics AMP K.K.
Kawasaki, JapanNAME
名称025 SERIES CONNECTOR
2POSITION PLUG HOUSING

SIZE

CAGE CODE

DRAWING NO
番号

1473143

RESTRICTED TO

-

SCALE
尺度

5:1

SHEET

1

OF

1

REV

01