
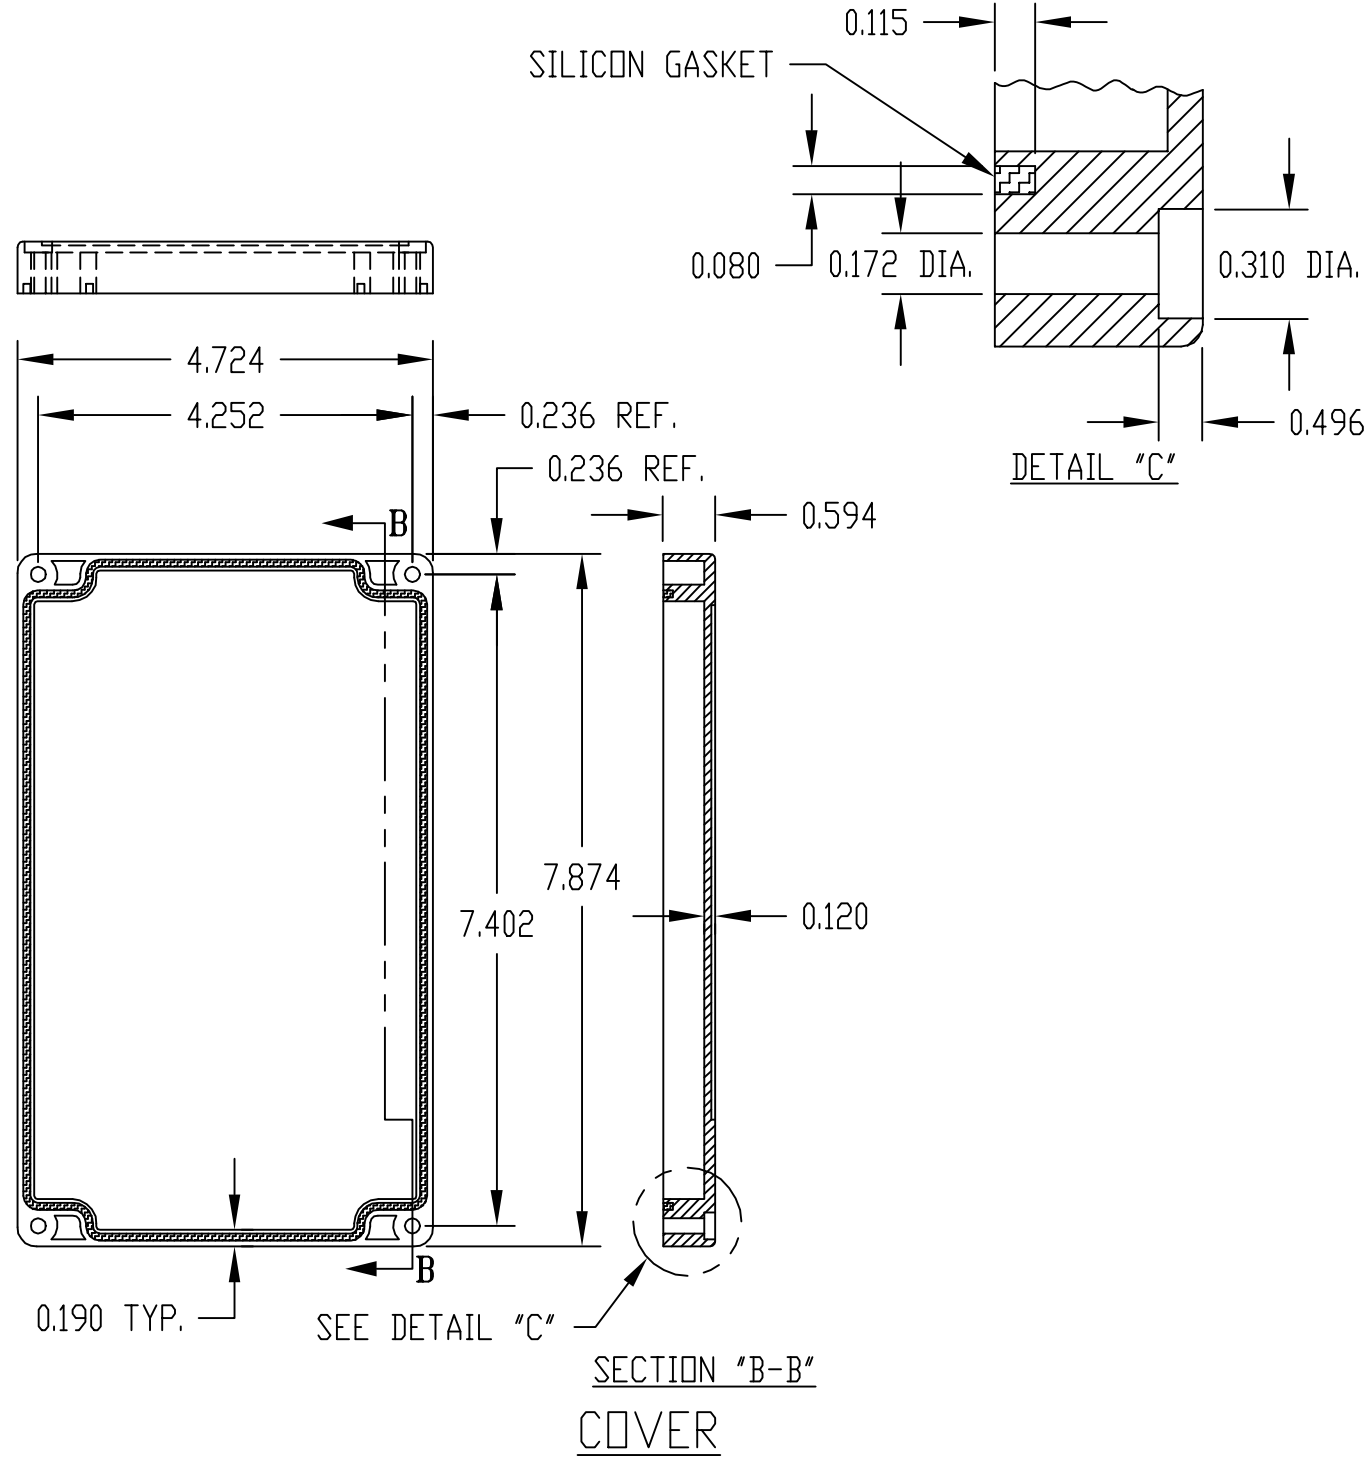
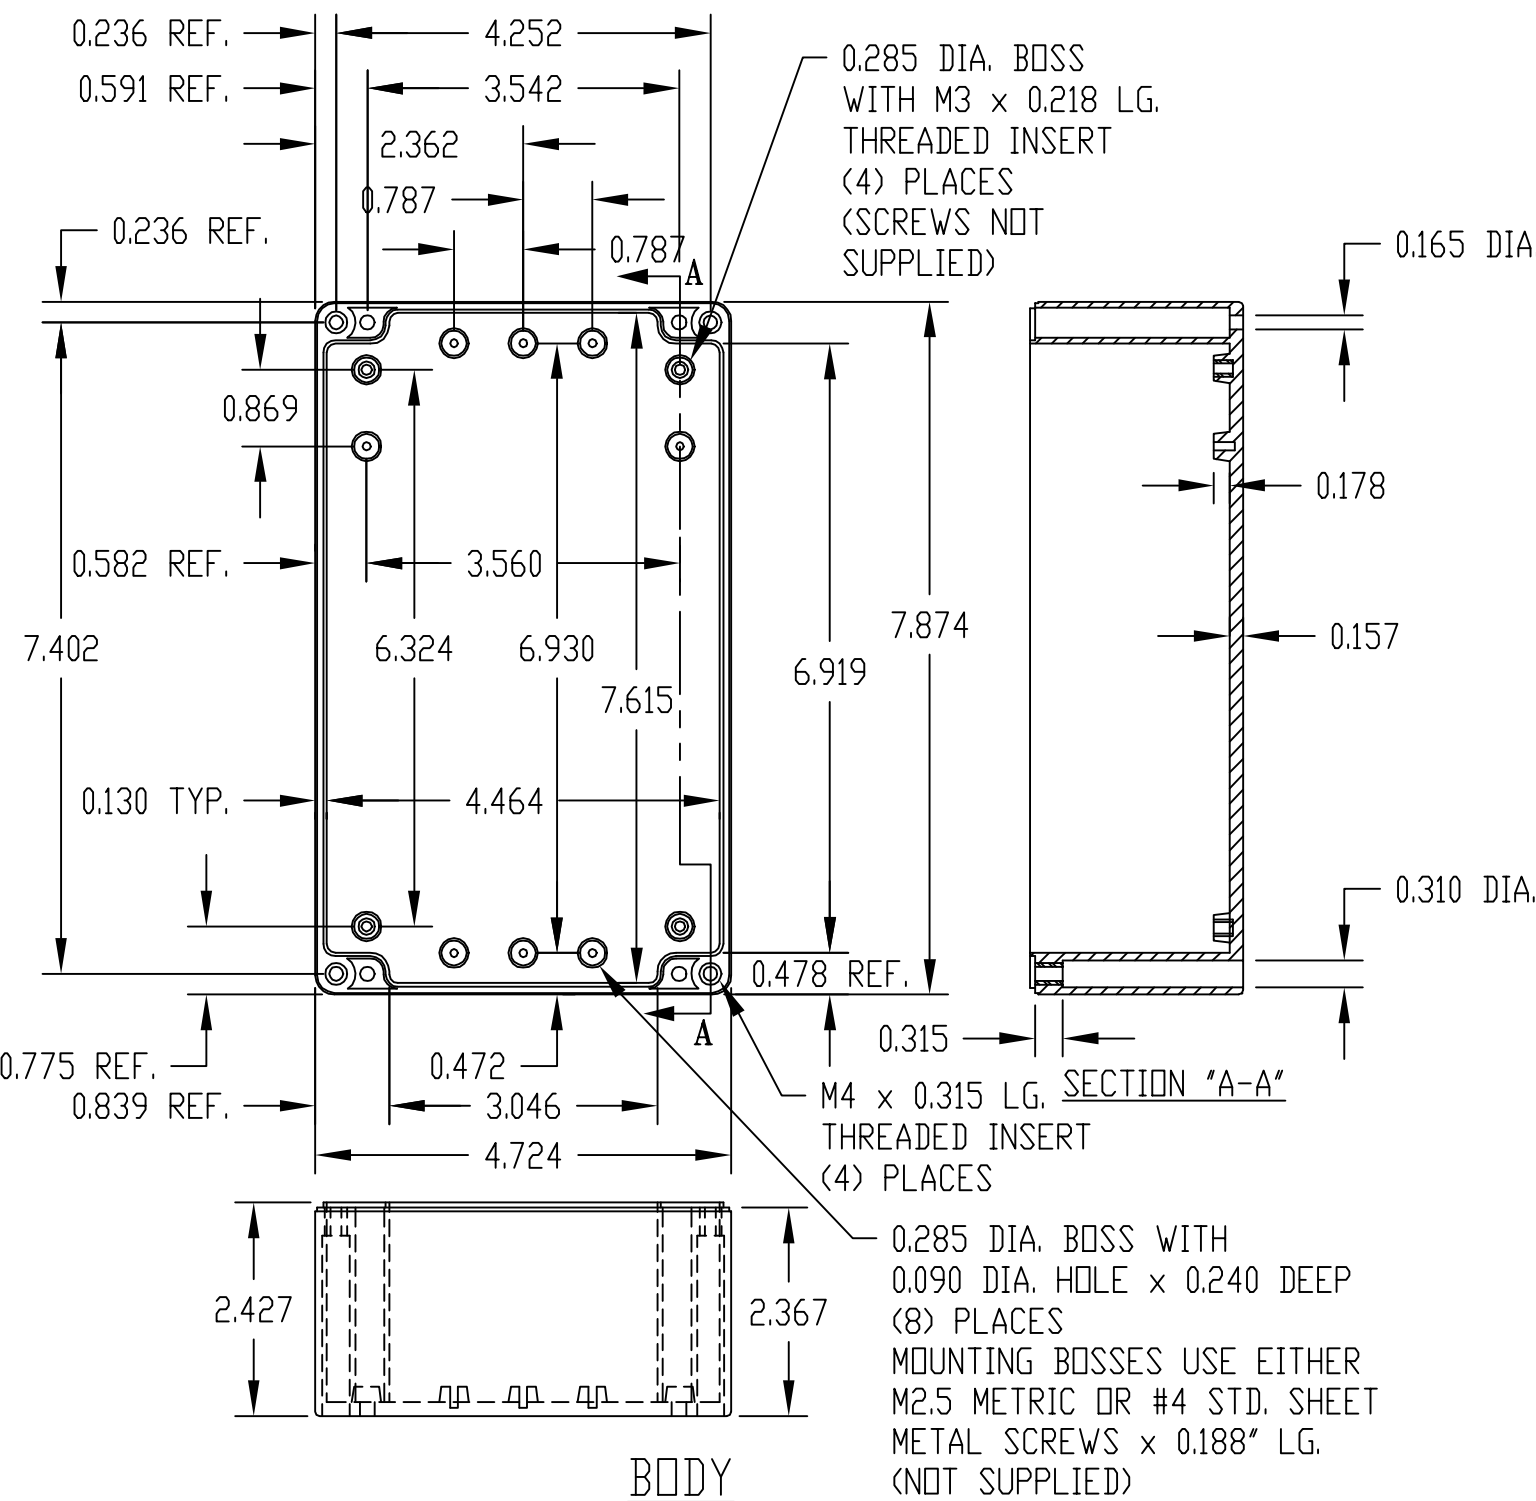


UL FILE #194432

MATERIAL:
 POLYCARBONATE, TRANSPARENT BLUE
 UL94V-2 FLAMMABILITY RATING
 UV STABILIZED
 SERVICE TEMPERATURE RANGE: -40°C TO +120°C

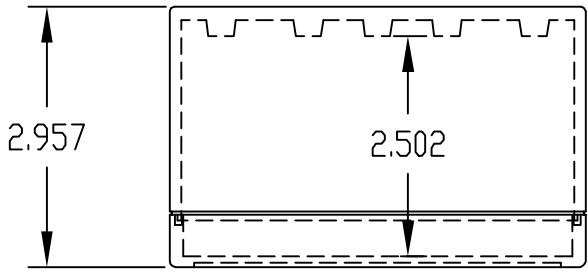

NOTE: ALL DIMENSIONS HAVE ±0.015 TOLERANCE UNLESS OTHERWISE SPECIFIED.
 HARDWARE KIT CONTAINS (4) M4 x 0.668" LG. SCREWS FOR ASSEMBLY.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bud Industries:](#)

[BT-2734](#)