


SPECIFICATIONS

Material: Boot: APM-RUBRGLAS (transparent silicone rubber) conforms to A-A-59588, Class III Grade 50.
Temperature Range: HEXSEALS: -94°F to +400°F
Pressure Range: Dust tight and splashproof.
Resistant to: Salt spray, weather, sunlight, ozone, corona and most acids.
Shelf Life: Excess of 25 years.
Operational Life: 10,000 actuations, minimum.

Notes:

1. Mounting screws are supplied in lengths shown unless otherwise specified.
2. New sizes and types of RUBRGLAS-SEELS® are being added regularly. Please request other types and styles as required.

Agency Recognition: Front Panel mounted Circuit Breaker Boots are UL-listed to UL Std. 50, types 1, 2, 3, 12, 12K, and 13. Back-of-Panel mounted Circuit Breaker boots are UL-listed to UL Std. 50, type 1. Also meet CSA standards.

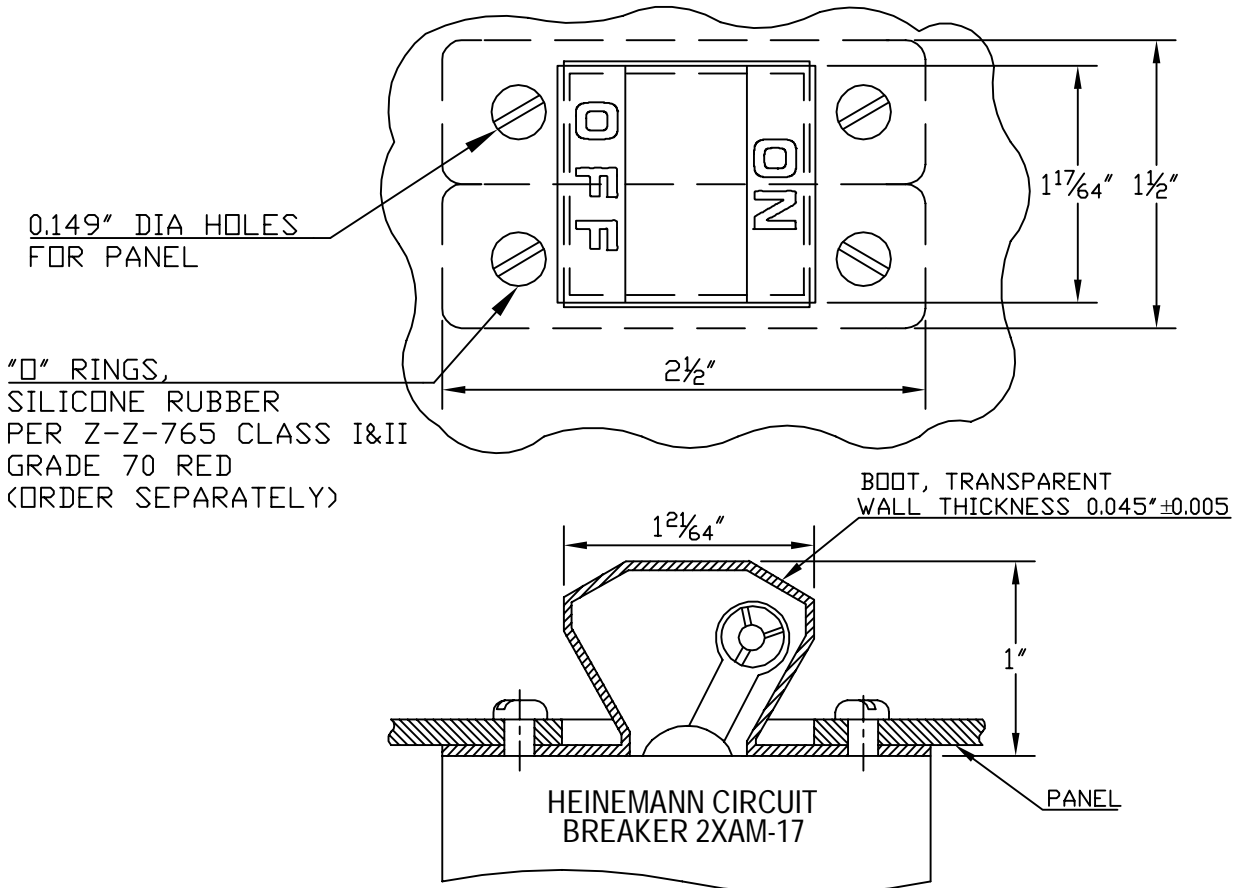

NOTES:

ASSEMBLY CONSISTS OF 1 BOOT, MAT'L APM RUBRGLAS®, ORDER SEPARATELY,
 4#6-32 APM SEELSKREWS® LENGTH=3/8.
 UNLESS OTHERWISE NOTED TOLERANCES ARE ± 1/32

BACK-OF-PANEL MOUNTING

| | | | |
|---|--|----------------|----------|
| H | RUBBER MAT'L CHANGED, WALL THICKNESS TOL. 0.010 CHANGED TO 0.005, HOLE DIM. Ø0.147\" | S. GOK | 10.05.09 |
| G | CAD COMPUTER GENERATED | | 01.03.03 |
| F | ADD TOL. TO PANEL CUTOUT | NICK | 02.07.69 |
| E | REDESIGNED, REDRAWN | NICK | 12.12.66 |
| REV. | DESCRIPTION | | DATE |
| MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION. | TITLE: CIRCUIT BREAKER BOOT, CIRCUIT BREAKER 2 GANG, TOGGLE | ENG. S. GOK | 10.05.09 |
| | | DWN. PALUMBO | 03.11.59 |
| | | CHKD. J. CELLA | 10.05.09 |
| MAT'L: RUBRGLASS® CONFORMS TO A-A-59588, CL III | APM-HEXSEAL CORPORATION | SCALE 1:1 | HE-1077 |
| FINISH: 50 DUROMETER TRANSPARENT | | DWG. NO. | |

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.
 THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[APM HEXSEAL:](#)

[HE1077](#)