

# HITACHI

KAOHSIUNG HITACHI  
ELECTRONICS CO.,LTD  
P.O. BOX 26-27  
2,13TH EAST ST. K.E.P.Z.  
KAOHSIUNG TAIWAN R.O.C.  
TEL:(07) 8215811 (7 LINE)  
FAX:(07) 8215815

FOR MESSRS : \_\_\_\_\_

DATE: May.28,2007

## CUSTOMER'S ACCEPTANCE SPECIFICATIONS

### SP14N001-Z1

### C O N T E N T S

| No. | ITEM                       | SHEET No.                                                | PAGE               |
|-----|----------------------------|----------------------------------------------------------|--------------------|
| 1   | COVER                      | 7B64PS 2701- SP14N001-Z1-5                               | 1-1/1              |
| 2   | RECORD OF REVISION         | 7B64PS 2702- SP14N001-Z1-5                               | 2-1/1              |
| 3   | GENERAL SPECIFICATION      | 7B64PS 2703- SP14N001-Z1-5                               | 3-1/1              |
| 4   | ABSOLUTE MAXIMUM RATINGS   | 7B64PS 2704- SP14N001-Z1-5                               | 4-1/1              |
| 5   | ELECTRICAL CHARACTERISTICS | 7B64PS 2705- SP14N001-Z1-5                               | 5-1/1              |
| 6   | OPTICAL CHARACTERISTICS    | 7B64PS 2706- SP14N001-Z1-5                               | 6-1/2~2/2          |
| 7   | BLOCK DIAGRAM              | 7B64PS 2707- SP14N001-Z1-5                               | 7-1/1              |
| 8   | INTERFACE TIMING           | 7B64PS 2708- SP14N001-Z1-5                               | 8-1/2~2/2          |
| 9   | OUTLINE DIMENSIONS         | 7B63PS 2709- SP14N001-Z1-5<br>7B64PS 2709- SP14N001-Z1-5 | 9-1/3<br>9-2/3~3/3 |
| 10  | APPEARANCE STANDARD        | 7B64PS 2710- SP14N001-Z1-5                               | 10-1/3~3/3         |
| 11  | PRECAUTION IN DESIGN       | 7B64PS 2711- SP14N001-Z1-5                               | 11-1/2~2/2         |
| 12  | DESIGNATION OF LOT MARK    | 7B64PS 2712- SP14N001-Z1-5                               | 12-1/1             |
| 13  | PRECAUTION FOR USE         | 7B64PS 2713- SP14N001-Z1-5                               | 13-1/1             |

\* When product will be discontinued , customer will be informed by HITACHI with twelve months prior announcement.

\* This product is inhibited to apply in any life support instrument.

ACCEPTED BY: \_\_\_\_\_

PROPOSED BY: Dan Cheng

|                                           |            |                           |      |       |
|-------------------------------------------|------------|---------------------------|------|-------|
| KAOHSIUNG HITACHI<br>ELECTRONICS CO.,LTD. | Sh.<br>No. | 7B64PS 2701-SP14N001-Z1-5 | PAGE | 1-1/1 |
|-------------------------------------------|------------|---------------------------|------|-------|

## RECORD OF REVISION

| DATE       | SHEET No.                                   | SUMMARY                                                                                                                                                                                                                                                                                                                              |         |      |         |   |                                            |   |   |                                            |
|------------|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------|---------|---|--------------------------------------------|---|---|--------------------------------------------|
| Sep.05,'01 | 7B64PS 2709-<br>SP14N001-Z1-2<br>PAGE 9-3/3 | Changed :<br>CN1:PIN Functions<br>Connector : MOLEX/52103-2617→MOLEX/52207-2690                                                                                                                                                                                                                                                      |         |      |         |   |                                            |   |   |                                            |
| Nov.27,'01 | 7B63PS 2709-<br>SP14N001-Z1-3<br>PAGE 9-1/3 | Changed :<br>CN1 PIN Direction NO.1 → 26 ; 26 → 1                                                                                                                                                                                                                                                                                    |         |      |         |   |                                            |   |   |                                            |
| Apr.14,'04 | 7B63PS 2709-<br>SP14N001-Z1-4<br>PAGE 9-1/3 | Changed :<br>Revised : CFL Cable length (50) → (56)                                                                                                                                                                                                                                                                                  |         |      |         |   |                                            |   |   |                                            |
| May.28,'07 | 7B64PS 2709-<br>SP14N001-Z1-5<br>Page 9-3/3 | 9.3 Internal Pin Connection<br>Changed :<br>CFL I / F : Mitsumi M63M83 – 04 → JAE IL-G-4S-S3C2-SA                                                                                                                                                                                                                                    |         |      |         |   |                                            |   |   |                                            |
|            | 7B64PS 2712-<br>SP14N001-5<br>Page 12-1/1   | 12. DESIGNATION OF LOT MARK<br>Added <table border="1"> <thead> <tr> <th>REV No.</th><th>ITEM</th><th>LOT No.</th></tr> </thead> <tbody> <tr> <td>-</td><td>CFL I/F Connector :<br/>Mitsumi M63M83 - 04</td><td>-</td></tr> <tr> <td>A</td><td>CFL I/F Connector :<br/>JAE IL-G-4S-S3C2-SA</td><td>7102T</td></tr> </tbody> </table> | REV No. | ITEM | LOT No. | - | CFL I/F Connector :<br>Mitsumi M63M83 - 04 | - | A | CFL I/F Connector :<br>JAE IL-G-4S-S3C2-SA |
| REV No.    | ITEM                                        | LOT No.                                                                                                                                                                                                                                                                                                                              |         |      |         |   |                                            |   |   |                                            |
| -          | CFL I/F Connector :<br>Mitsumi M63M83 - 04  | -                                                                                                                                                                                                                                                                                                                                    |         |      |         |   |                                            |   |   |                                            |
| A          | CFL I/F Connector :<br>JAE IL-G-4S-S3C2-SA  | 7102T                                                                                                                                                                                                                                                                                                                                |         |      |         |   |                                            |   |   |                                            |
|            |                                             |                                                                                                                                                                                                                                                                                                                                      |         |      |         |   |                                            |   |   |                                            |

### 3. GENERAL SPECIFICATIONS

|                             |                                                                 |
|-----------------------------|-----------------------------------------------------------------|
| (1) Part Name               | SP14N001-Z1                                                     |
| (2) Outer Dimensions        | 159.4(W)mm x 101.0(H)mm x 11.0(D)mm (max.)                      |
| (3) Effective Display Area  | 123 mm min. x 68 mm min.                                        |
| (4) Dot Size                | 0.48(W)min. x 0.48(H)min.                                       |
| (5) Dot Pitch               | 0.50(W)mm x 0.50(H)mm                                           |
| (6) Dot Number (Resolution) | 240 (W) x 128 (H)                                               |
| (7) Duty Ratio              | 1/128                                                           |
| (8) LCD Type                | Transmissive type F-STN<br>With anti-glare type upper polarizer |
| (9) Viewing Direction       | 6 O'clock                                                       |
| (10) Back Light Type        | Cold cathode fluorescent lamp.                                  |
| (11) LCD Controller         | T6963C / Toshiba                                                |

## 4. ABSOLUTE MAXIMUM RATINGS

### 4.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS.

VSS=0V:STANDARD

| ITEM                   | SYMBOL  | MIN. | MAX.    | UNIT | COMMENT      |
|------------------------|---------|------|---------|------|--------------|
| Power Supply For Logic | VDD-VSS | 0    | 7.0     | V    |              |
| Input Voltage          | $V_i$   | -0.3 | VDD+0.3 | V    | (Note 1)     |
| Input Current          | $I_i$   | 0    | 1       | A    |              |
| Static Electricity     | VESD0   | -    | ±100    | V    | (Note 1,2,3) |
|                        | VESD1   | -    | ±10     | KV   | (Note 1,2,4) |

Note 1 : Make certain you are grounded when handling LCM.

Note 2 : Energy storage capacitance 200pF , discharge resistance 250Ω Ta=25℃ , 60%RH.

Note 3 : Contact discharge to I/F connector pins.

Note 4 : Contact discharge to front metal bezel.

### 4.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS.

| ITEM                | OPERATING      |                                 | STORAGE        |                                             | COMMENT              |
|---------------------|----------------|---------------------------------|----------------|---------------------------------------------|----------------------|
|                     | MIN.           | MAX.                            | MIN.           | MAX.                                        |                      |
| Ambient Temperature | -10℃           | 60℃                             | -20℃           | 70℃                                         | (Note 2,3)           |
| Humidity            | (Note 1)       |                                 | (Note 1)       |                                             | without condensation |
| Vibration           | -              | 2.45m/s <sup>2</sup><br>(0.25G) | -              | 11.76m/s <sup>2</sup><br>(1.2G)<br>(Note 5) | (Note 4)<br>1h max.  |
| Shock               | -              | 29.4m/s <sup>2</sup><br>(3 G)   | -              | 490.0m/s <sup>2</sup><br>(50 G)<br>(Note 5) | XYZ directions       |
| Corrosive Gas       | Not Acceptable |                                 | Not Acceptable |                                             |                      |

Note 1 : Ta ≤ 40℃ : 85%RH max.

Ta > 40℃ : Absolute humidity must be lower.

Than the humidity of 85%RH at 40℃

Note 2 : Ta at -20℃ —— < 48h, at 60℃ < 168h.

Note 3 : Background color changes slightly depending on ambient temperature.

This phenomenon is reversible.

Note 4 : 5Hz~100Hz (except resonance frequency)

Note 5 : This module should be operated normally after finishing the test.

Note 6 : When LCM will be operated at 0℃ , the life time of CFL will be reduced.

Need to make sure of value of the characteristics of inverter.

Also the response time at 0℃ will be slower.

Note 7 : There are possibility that color non-uniformity happened while operating at over 40℃.

## 5. ELECTRICAL CHARACTERISTICS

### 5.1 ELECTRICAL CHARACTERISTICS

| ITEM                                    | SYMBOL  | CONDITION                  | MIN.   | TYP.   | MAX.   | UNIT |
|-----------------------------------------|---------|----------------------------|--------|--------|--------|------|
| Power Supply Voltage For Logic          | VDD-VSS | -                          | (4.75) | 5.0    | (5.25) | V    |
| LC driver Circuit Power Supply Voltage  | VEE-VSS | -                          | -15.5  | -15.0  | -14.5  | V    |
| Input Voltage                           | VI      | H LEVEL                    | 0.8VDD | -      | VDD    | V    |
|                                         |         | L LEVEL                    | 0      | -      | 0.2VDD | V    |
| Power Supply Current For Logic (Note 1) | IDD     | VDD-VSS=5.0V               | -      | (11.7) | (14.0) | mA   |
| Power Supply Current For LCD (Note 1)   | IEE     | VDD-VSS=5.0V               | -      | (2.5)  | (4.0)  | mA   |
| Recommended LC Driving Voltage (Note 2) | VDD-V0  | Ta= 0°C , $\phi = 0^\circ$ | -      | (16.9) | -      | V    |
|                                         |         | Ta=25°C , $\phi = 0^\circ$ | -      | (15.8) | -      | V    |
|                                         |         | Ta=50°C , $\phi = 0^\circ$ | -      | (15.2) | -      | V    |

Note 1 : VDD-V0=(15.8)V , Ta=25°C

Note 2 : Recommended LC driving voltage may fluctuate about  $\pm 1.0V$  by each module test pattern is all "Q".

### 5.2 ELECTRICAL CHARACTERISTICS OF BACKLIGHT

| ITEM                       | SYMBOL         | MIN.   | TYP.  | MAX. | UNIT   | NOTE    |
|----------------------------|----------------|--------|-------|------|--------|---------|
| Lamp Voltage               | VL             | -      | (300) | -    | Vrms   | Ta=25°C |
| Frequency                  | fL             | -      | (70)  | (85) | kHz    | Ta=25°C |
| Lamp Current               | IL             | (4)    | (5)   | (6)  | mA rms | Ta=25°C |
| Starting Discharge Voltage | VS<br>(Note 2) | (1000) | -     | -    | Vrms   | Ta=25°C |

Please certainly inform HITACHI before designing lamp drive circuit according to the above specifications.

Note 1 : Please make sure that your inverter is designed to meet the above specifications.

Note 2 : Starting discharge voltage is increased when LCM is operating at lower temperature.  
Please check the characteristics of your inverter before applying to your set.

Note 3 : Average life time of CFL will be decreased when LCM is operating at lower temperature.

Note 4 : Under lower driving frequency of an inverter , a certain backlight system (CFL & CFL reflection sheet) may generate a sound noise.

Note 5 : When IL is used over 5.5mA , it may cause uneven contrast near CFL location , due to heat dispersion from CFL.

## 6. OPTICAL CHARACTERISTICS


### 6.1 OPTICAL CHARACTERISTICS

Ta=25°C (Backlight on)

| ITEM                 | SYMBOL          | CONDITIONAL                        | MIN. | TYP.  | MAX. | UNIT | NOTE |
|----------------------|-----------------|------------------------------------|------|-------|------|------|------|
| Viewing Area         | $\phi 2-\phi 1$ | $K \geq 2.0$                       | -    | 40    | -    | deg  | 1,2  |
| Contrast Ratio       | K               | $\phi = 0^\circ, \theta = 0^\circ$ | -    | (20)  | -    | -    | 3    |
| Response Time (Rise) | tr              | $\phi = 0^\circ, \theta = 0^\circ$ | -    | (120) | -    | ms   | 4    |
| Response Time (Fall) | tf              | $\phi = 0^\circ, \theta = 0^\circ$ | -    | (150) | -    | ms   | 4    |


(Measure condition by HITACHI)

Note 1 : Definition of  $\theta$  and  $\phi$


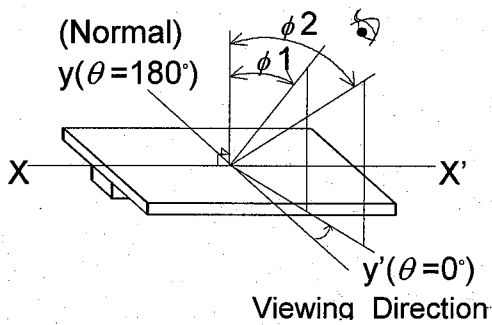


Note 3 : Definition of contrast "K"


$$K = \frac{\text{Brightness on selected dot (B1)}}{\text{Brightness on non-selected dot (B2)}}$$

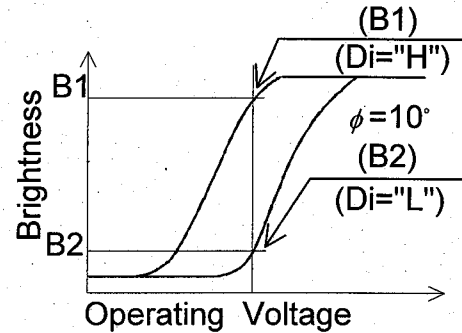

Note 2 : Definition of viewing angle  $\phi 1$  and  $\phi 2$ .

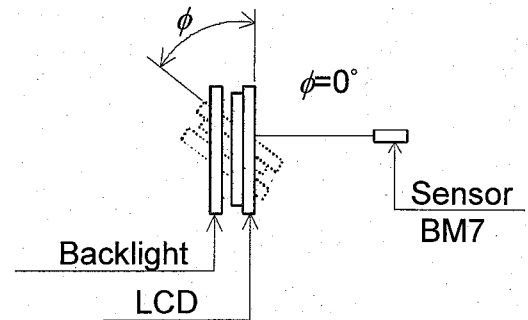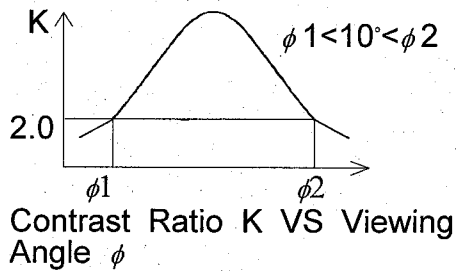

Note 4 : Definition of optical response

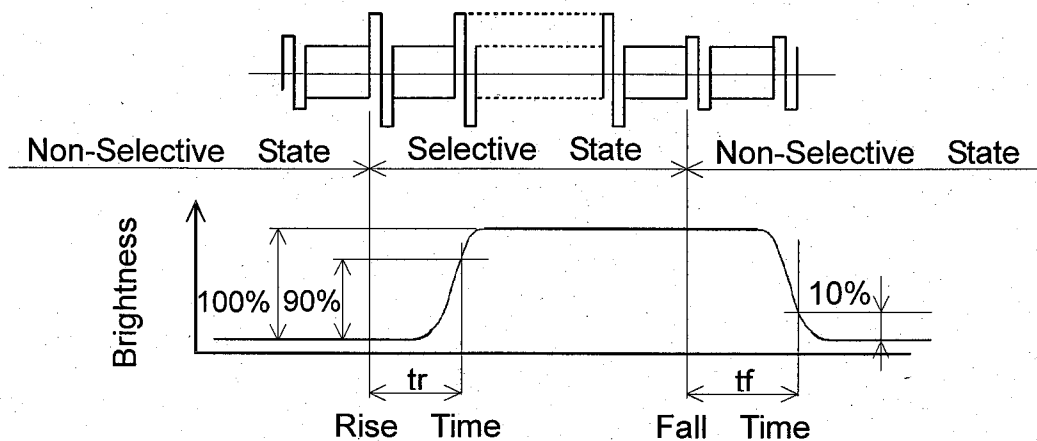

## 6.2 OPTICAL CHARACTERISTICS OF BACKLIGHT

| I T E M               | MIN.  | TYP. | MAX. | UNIT              | NOTE                         |
|-----------------------|-------|------|------|-------------------|------------------------------|
| Brightness            | (120) | 150  | -    | cd/m <sup>2</sup> | IL=(5mA)<br>(Note 1,2)       |
| Rise Time             | -     | 5    | -    | Minute            | IL=(5mA)<br>Brightness 80%   |
| Brightness Uniformity | -     | -    | ±30  | %                 | Undermentioned<br>(Note 1,3) |


CFL : Initial, Ta=25°C, VDD-V0=(15.8)V

Display data should be all "ON".

Note 1 : Measurement after 10 minutes of CFL operating.

Note 2 : Brightness control : 100%


Note 3 : Measure of the following 9 places on the display.

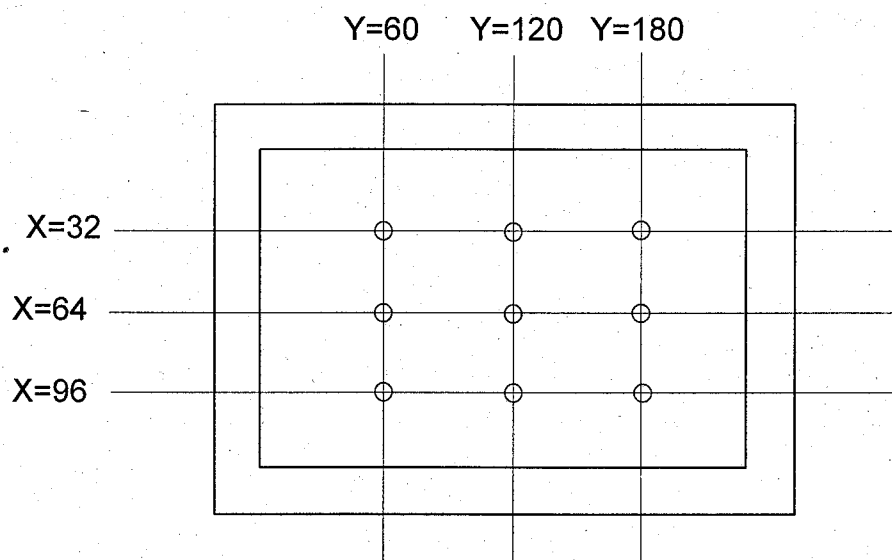

Definition of the brightness tolerance.

$$\left( \frac{\text{Max. or min. Brightness} - \text{Average Brightness}}{\text{Average Brightness}} \right) \times 100$$


## 7. BLOCK DIAGRAM

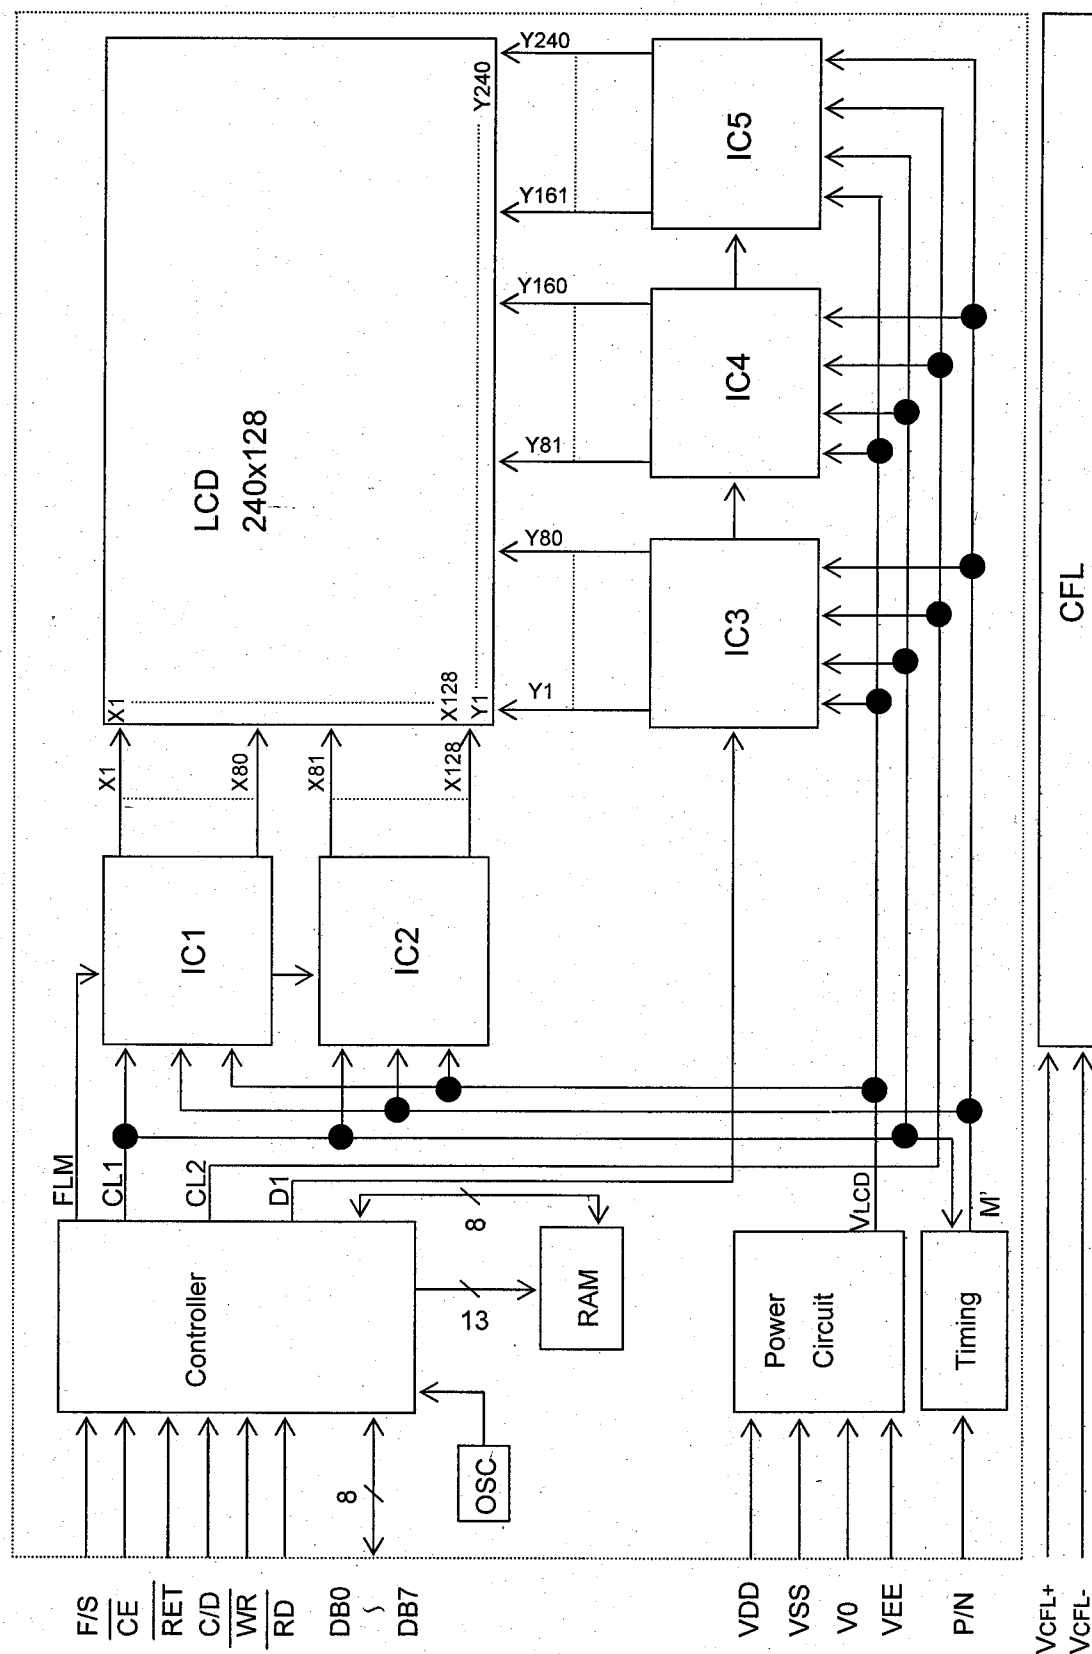


## 8. INTERFACE TIMING

### 8.1 INTERFACE TIMING

| ITEM                   | SYMBOL        | MIN. | TYP. | MAX. | UNIT |
|------------------------|---------------|------|------|------|------|
| C / D Setup Time       | tCDS          | 100  | -    | -    | ns   |
| C / D Hold Time        | tCHD          | 10   | -    | -    | ns   |
| CE, RD, WR Pulse Width | tCE, tRD, tWR | 80   | -    | -    | ns   |
| Data Setup Time        | tDS           | 80   | -    | -    | ns   |
| Data Hold Time         | tDH           | 40   | -    | -    | ns   |
| Access Time            | tACC          | -    | -    | 150  | ns   |
| Output Hold Time       | tOH           | 10   | -    | 50   | ns   |

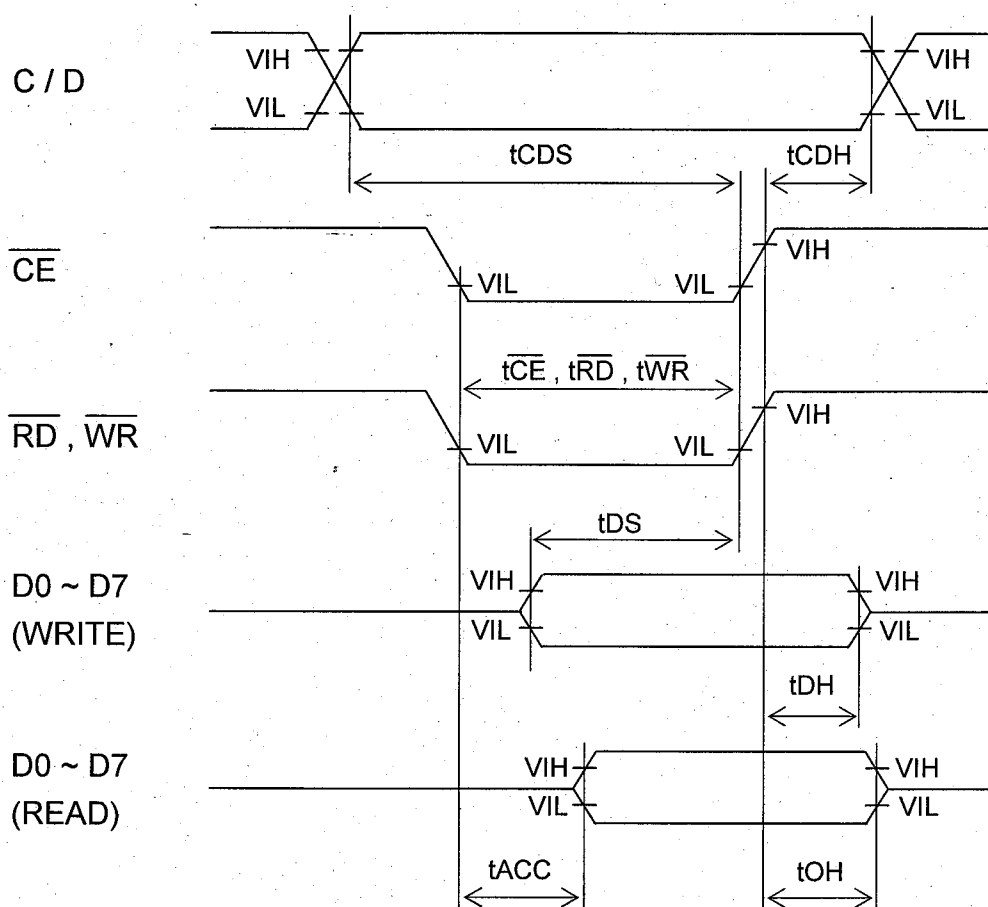


## 8.2 TIMING OF POWER SUPPLY AND INTERFACE SIGNAL

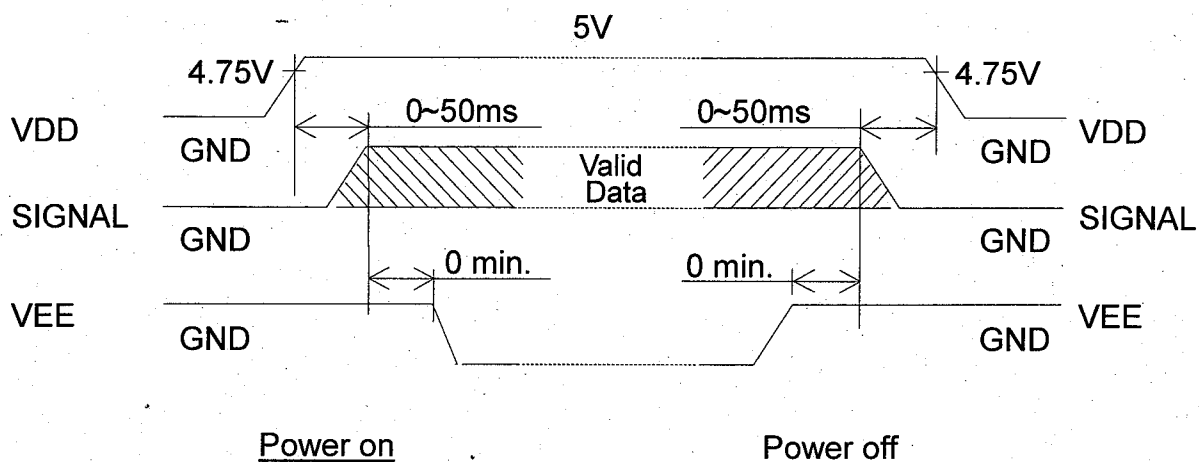

The missing pixels may occur when the LCM is driven beyond above power interface timing sequence.

## 8.3 POWER SUPPLY FOR LCM (EXAMPLE)

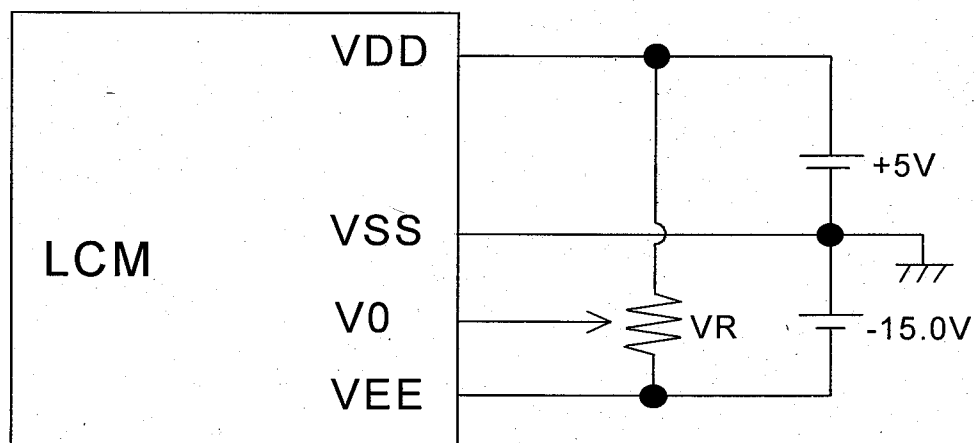


Recommend:

VR: 10~20k $\Omega$



VDD-V0 : LCD driving voltage

9. OUTLINE DIMENSIONS

9.1 OUTLINE DIMENSIONS

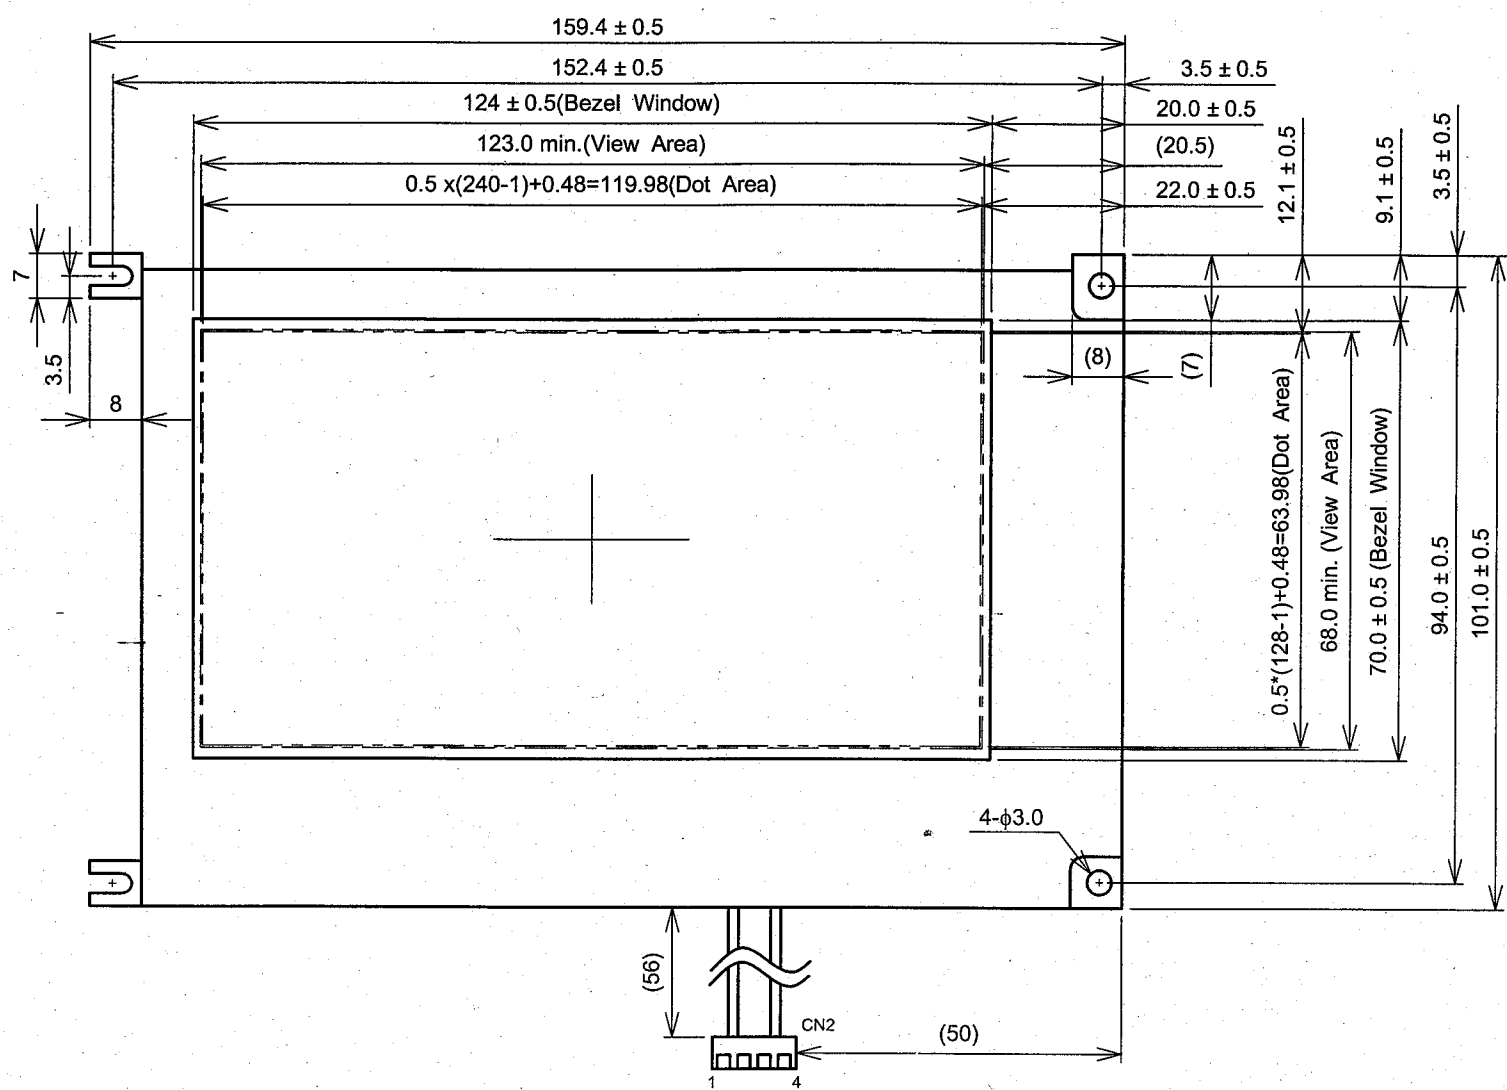


Front View

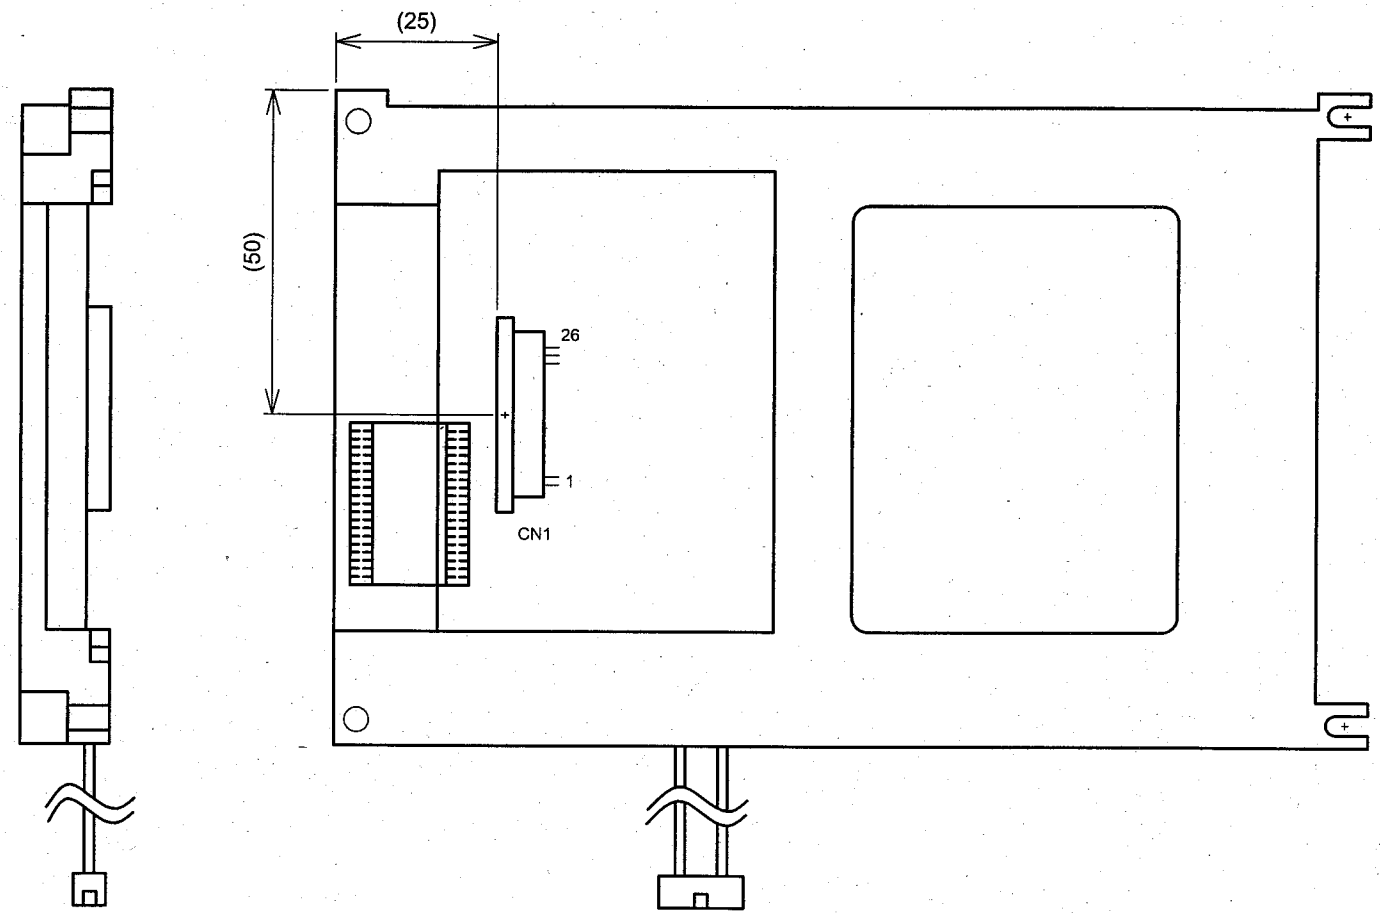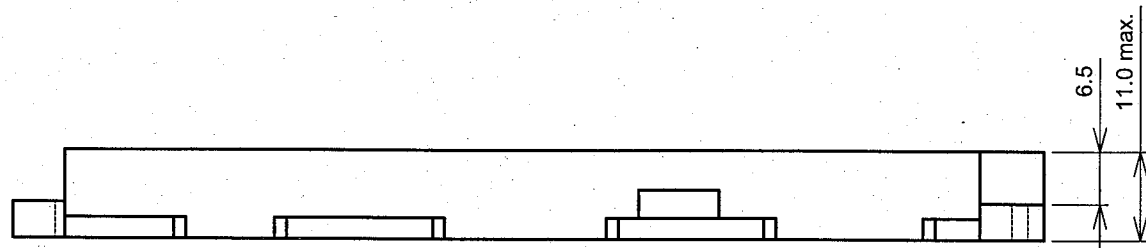

Rear View

Scale : NTS  
Unit : mm

## 9.2 DISPLAY PATTERN

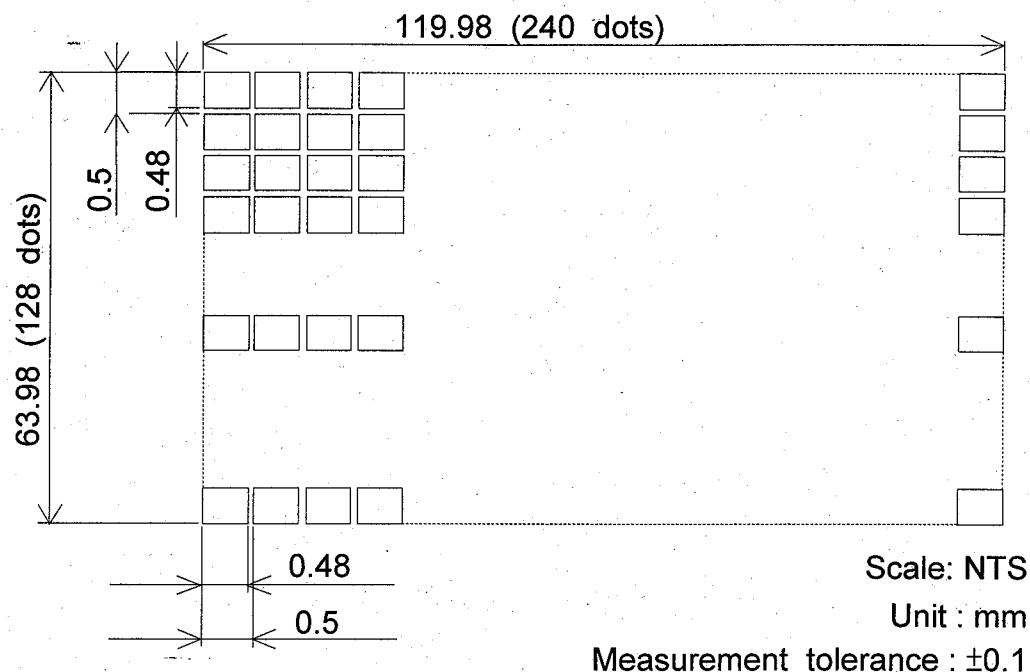

### 9.3 INTERNAL PIN CONNECTION

CN1 : Pitch 1.0mm 26pins connector

Suitable connector: Molex : 52207-2690

| PIN No. | SYMBOL           | FUNCTION                                                                                                                              |
|---------|------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| 1       | VSS(0V)          | Ground                                                                                                                                |
| 2       | VDD(+5V)         | Power supply for logic                                                                                                                |
| 3       | V0(Input)        | Power supply for LCD drive                                                                                                            |
| 4       | C/D              | $\overline{WR}$ ="L" : C/D="H" Command write<br>C/D="L" Data write<br>$\overline{RD}$ ="L" : C/D="H" Status read<br>C/D="L" Data read |
| 5       | $\overline{WR}$  | Data write (Data write at "L")                                                                                                        |
| 6       | $\overline{RD}$  | Data read (Read data at "L")                                                                                                          |
| 7       | DB0              | Data bus                                                                                                                              |
| 8       | DB1              |                                                                                                                                       |
| 9       | DB2              |                                                                                                                                       |
| 10      | DB3              |                                                                                                                                       |
| 11      | DB4              |                                                                                                                                       |
| 12      | DB5              |                                                                                                                                       |
| 13      | DB6              |                                                                                                                                       |
| 14      | DB7              |                                                                                                                                       |
| 15      | $\overline{CE}$  | Chip enable ( $\overline{CE}$ must be "L")                                                                                            |
| 16      | $\overline{RET}$ | Reset                                                                                                                                 |
| 17      | VEE              | Power supply for LCD drive                                                                                                            |
| 18      | D.OFF            | VDD/Display , GND/Display off                                                                                                         |
| 19      | F/S              | Character font select : F/S="H" 6*8Font<br>F/S="L" 8*8Font                                                                            |
| 20      | P/N              | Display mode reverse.                                                                                                                 |
| 21      | NC               | No connection                                                                                                                         |
| 22      | NC               | No connection                                                                                                                         |
| 23      | NC               | No connection                                                                                                                         |
| 24      | NC               | No connection                                                                                                                         |
| 25      | NC               | No connection                                                                                                                         |
| 26      | NC               | No connection                                                                                                                         |


CN2 : JAE IL-G-4S-S3C2-SA

| PIN No. | SYMBOL | FUNCTION             |
|---------|--------|----------------------|
| 1       | VCFL-  | CFL ground           |
| 2       | NC     | No connection        |
| 3       | NC     | No connection        |
| 4       | VCFL+  | Power supply for CFL |

## 10. APPEARANCE STANDARD

10.1 APPEARANCE INSPECTION CONDITIONS (IN THE EFFECTIVE VIEWING AREA) VISUAL INSPECTION SHOULD BE UNDER THE FOLLOWING CONDITION.


- (1) In the dark room.
- (2) With CFL panel lighted with prescribed inverter circuit.
- (3) With eye to LCD distance is 25cm.
- (4) Viewing angle within 45 degrees from the perpendicular to the center LCD.

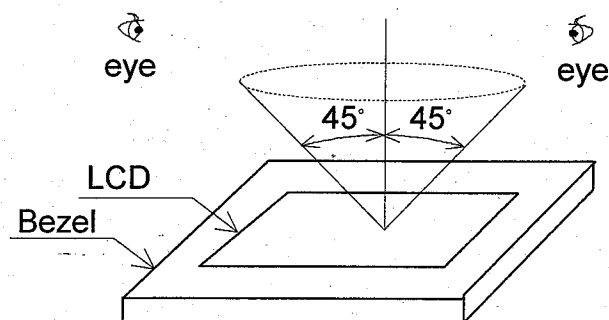

### 10.2 DEFINITION OF EACH ZONE

A zone : Within the viewing area specified at page 9-1/3 of this document.

B zone : Area between the outline of LCM and the effective area specified at page 9-1/3 of this document.

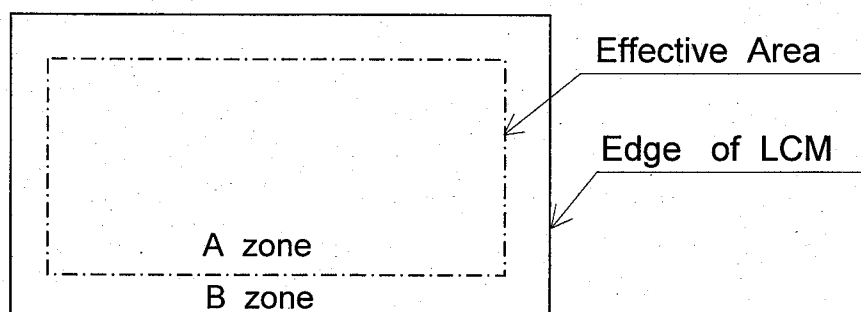

### 10.3 APPEARENCE SPECIFICATION

\*) If a problem occurs in respect to any of these items , responsible of both parties (customer and HITACHI) will discuss in more detail.


| No.                                | ITEM                                          | CRITERIA                                                                      |                                 |                              |   | A | B |
|------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------|---------------------------------|------------------------------|---|---|---|
| L<br><br>C<br><br>D                | Scratches                                     | Distinguished one is not acceptable<br>(To be judged by HITACHI limit sample) |                                 |                              |   | * | - |
|                                    | Dent                                          | Same as above                                                                 |                                 |                              |   | * | - |
|                                    | Wrinkles in Polarizer                         | Same as above                                                                 |                                 |                              |   | * | - |
|                                    | Bubbles                                       | Average Diameter<br>D(mm)                                                     |                                 | Maximum Number<br>Acceptable |   | O | - |
|                                    |                                               | D≤0.2                                                                         |                                 | Ignore                       |   |   |   |
|                                    |                                               | 0.2<D≤0.3                                                                     |                                 | 12                           |   |   |   |
|                                    |                                               | 0.3<D≤0.5                                                                     |                                 | 3                            |   |   |   |
|                                    |                                               | 0.5<D                                                                         |                                 | None                         |   |   |   |
|                                    | Stains,<br>Foreign<br>Materials,<br>Dark Spot | Filamentous                                                                   |                                 |                              |   | O | - |
|                                    |                                               | Length<br>L(mm)                                                               | Width<br>W(mm)                  | Maximum Number<br>Acceptable |   |   |   |
|                                    |                                               | L≤2.0                                                                         | W≤0.03                          | Ignore                       |   |   |   |
|                                    |                                               | L≤3.0                                                                         | 0.03<W≤0.05                     | 6                            |   |   |   |
|                                    |                                               | -                                                                             | 0.05<W                          | Judged by<br>"round" shape   |   |   |   |
|                                    |                                               | Round                                                                         |                                 |                              |   | O | - |
|                                    |                                               | Average Diameter<br>D(mm)                                                     | Maximum Number<br>Acceptable    | Minimum<br>Space             |   |   |   |
|                                    |                                               | D<0.2                                                                         | Ignore                          | -                            |   |   |   |
|                                    |                                               | 0.2 ≤D<0.33                                                                   | 8                               | 10mm                         |   |   |   |
|                                    |                                               | 0.33≤D                                                                        | None                            | -                            |   |   |   |
|                                    |                                               | Total                                                                         | Filamentous + Round = 10        |                              |   |   |   |
|                                    |                                               | Those wiped out easily are acceptable                                         |                                 |                              |   | O | O |
|                                    | Color Tone                                    | To be judged by HITACHI limit sample                                          |                                 |                              |   | O | - |
|                                    | Color Uniformity                              | Same as above                                                                 |                                 |                              |   | O | - |
|                                    | Pinhole                                       | Average Diameter<br>D(mm)                                                     |                                 | Maximum Number<br>Acceptable |   | O | - |
|                                    |                                               | D≤0.15                                                                        |                                 | Ignore                       |   |   |   |
|                                    |                                               | 0.15<D≤0.3                                                                    |                                 | 10                           |   |   |   |
|                                    |                                               | C≤0.015                                                                       |                                 | Ignore                       |   |   |   |
| Contrast<br>Irregularity<br>(Spot) | Average<br>Diameter<br>D(mm)                  | Contrast                                                                      | Maximum<br>Number<br>Acceptable | Minimum<br>Space             | O | - |   |
|                                    | D≤0.25                                        | To be<br>judged by<br>HITACHI                                                 | Ignore                          | -                            |   |   |   |
|                                    | 0.25<D≤0.35                                   |                                                                               | 10                              | 20mm                         |   |   |   |
|                                    | 0.35<D≤0.5                                    |                                                                               | 4                               | 20mm                         |   |   |   |
|                                    | 0.5 <D                                        |                                                                               | None                            | -                            |   |   |   |

| No.             | ITEM                                       | CRITERIA      |              |                           |               | A | B |
|-----------------|--------------------------------------------|---------------|--------------|---------------------------|---------------|---|---|
| L<br>C<br>D     | Contrast Irregularity (Line) (Filamentous) | Width W(mm)   | Length L(mm) | Maximum Number Acceptable | Minimum Space | O | - |
|                 |                                            | $W \leq 0.25$ | $L \leq 1.2$ | 2                         | 20mm          |   |   |
|                 |                                            | $W \leq 0.2$  | $L \leq 1.5$ | 3                         | 20mm          |   |   |
|                 |                                            | $W \leq 0.15$ | $L \leq 2.0$ | 3                         | 20mm          |   |   |
|                 |                                            | $W \leq 0.1$  | $L \leq 3.0$ | 4                         | 20mm          |   |   |
|                 | Total                                      |               |              | 6                         |               |   |   |
| Rubbing Scratch | To be judged by HITACHI standard           |               |              |                           | O             | - |   |

| No.         | ITEM                                             | CRITERIA               |               |                           |
|-------------|--------------------------------------------------|------------------------|---------------|---------------------------|
| C<br>F<br>L | Dark Spots, White Spots Foreign Materials (Spot) | Average Diameter D(mm) |               | Maximum Number Acceptable |
|             |                                                  | $D \leq 0.4$           |               | Ignore                    |
|             |                                                  | $D > 0.4$              |               | None                      |
| B<br>/<br>L | Foreign Materials (Line)                         | Width W(mm)            | Length L(mm)  | Maximum Number acceptable |
|             |                                                  | $W \leq 0.2$           | $L < 2.5$     | $\leq 1$                  |
|             |                                                  | $W \leq 0.2$           | $L > 2.5$     | None                      |
|             |                                                  | $W > 0.2$              | -             | None                      |
|             | Scratches                                        | Width W(mm)            | Length L(mm)  | Maximum Number Acceptable |
|             |                                                  | $W \leq 0.1$           | -             | Ignore                    |
|             |                                                  | $0.1 < W \leq 0.2$     | $L \leq 11.0$ | $\leq 1$                  |
|             |                                                  | $0.1 < W \leq 0.2$     | $L \geq 11.0$ | None                      |
|             |                                                  | $W > 0.2$              | -             | None                      |


Note

(1) Definition of average diameter D




$$D = \frac{a+b}{2}$$

(2) Definition of length L and width W

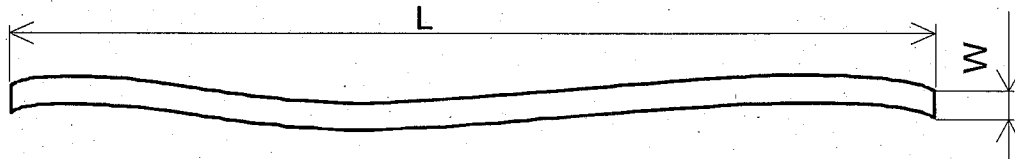

(3) Definition of pinhole

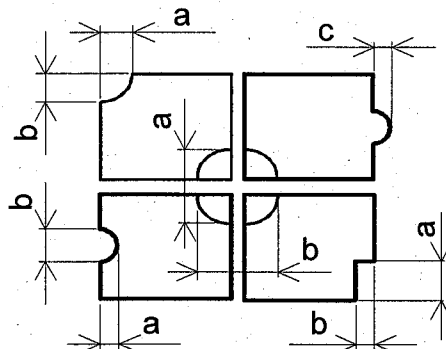

C : Saliency

## 11. PRECAUTION IN DESIGN

### 11.1 LC DRIVING VOLTAGE (VEE) AND VIEWING ANGLE RANGE.

Setting VEE out of the recommended condition will be a cause for a change of viewing angle range.

### 11.2 CAUTION AGAINST STATIC CHARGE

As this module is provided with C-MOS LSI, the care to take such a precaution as grounding the operator's body is required when handling it.

### 11.3 POWER ON SEQUENCE

Input signals should not be applied to LCD module before power supply voltage is applied and reaches to specified voltage ( $5V \pm 0.5\%$ ).

If above sequence is not kept, C-MOS LSI of LCD modules may be damaged due to latch up problem.

### 11.4 PACKAGING

- (1) No. leaving product is preferable in the place of high humidity for a long period of time.

For their storage in the place where temperature is  $35^{\circ}\text{C}$  or higher, special care to prevent them from high humidity is required.

A combination of high temperature and high humidity may cause them polarization degradation as well as bubble generation and polarizer peel-off.

Please keep the temperature and humidity within the specified range for use and storage.

- (2) Since upper/bottom polarizers tend to be easily damaged, they should be handled full with care so as not to get them touched, pushed or rubbed.

- (3) As the adhesives used for adhering upper/bottom polarizers are made of organic substances which will be deteriorated by a chemical reaction with such chemicals as acetone, toluene, ethanol and isopropyl alcohol.

The following solvents are recommended for use:  
normal hexane

please contact us when it is necessary for you to use chemicals.

- (4) Lightly wipe to clean the dirty surface with absorbent cotton waste or other soft material like chamois, soaked in the chemicals recommended without scrubbing it hardly.

To prevent the display surface from damage and keep the appearance in good state, it is sufficient, in general, to wipe it with absorbent cotton.

- (5) Immediately wipe off saliva or water drop attached on the display area because its long period adherence may cause deformation or faded color on the spot.

- (6) Foggy dew deposited on the surface and contact terminals due to coldness will be caused for polarizer damage, stain and dirt on product.

When necessary to take out the products from some place at low temperature for test, etc.

It is required for them to be warmed up in a container once at the temperature higher than that of room.

- (7) Touching the display area and contact terminals with bare hands and contaminating them are prohibited, because the stain on the display area and poor insulation between terminals are often caused by being touched by bare hands.

(There are some cosmetics detrimental to polarizers.)

- (8) In general the quality of glass is fragile so that it tends to be cracked or chipped in handling, specially on its periphery.

Be careful not to give it sharp shock caused by dropping down, etc.

#### 11.5 CAUTION FOR OPERATION

- (1) It is an indispensable condition to drive LCD's within the specified voltage limit since the higher voltage than the limit causes the shorter LCD life.  
An electrochemical reaction due to direct current causes LCD's undesirable deterioration, so that the use of direct current driver should be avoided.
- (2) Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD's show dark bull color in them.  
However those phenomena do not mean malfunction or out of order with LCD's which will come back in the specified operating temperature range.
- (3) IF the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- (4) A slight dew depositing on terminals is a cause for electrochemical reaction resulting in terminal open circuit.

Usage under the relative condition of 40 degree c 50%RH or less is required.

#### 11.6 STORAGE

In case of storing for a long period of time (for instance, for years) for the purpose of replacement use, the following ways are recommended.

- (1) Storage in a polyethylene bag with the opening sealed so as not to enter fresh air outside in it, and with no desiccant.
- (2) Placing in a dark place where neither exposure to direct sunlight nor light is, keeping temperature in the range from 0°C to 35°C.
- (3) Storage with no touch on polarizer surface by anything else.  
(It is not recommended to store them as they have been contained in the inner container at the time of delivery from us.)


#### 11.7 SAFETY

- (1) It is recommendable to crash damage or unnecessary LCD's into pieces and wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.
- (2) When any liquid leaked out of a damage glass cell comes in contact with your hands, please wash it off well with soap and water.

## 12. DESIGNATION OF LOT MARK

### 12.1 Lot mark

Lot mark is consisted of 4 digits number.

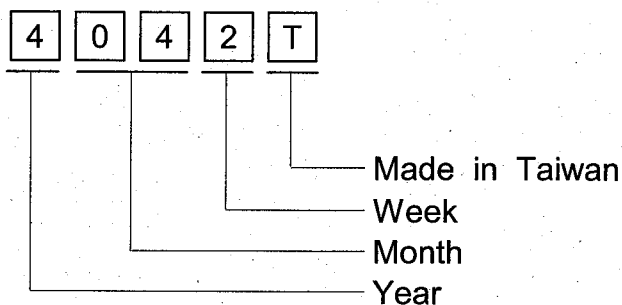

| YEAR | FIGURE IN LOT MARK |
|------|--------------------|
| 2007 | 7                  |
| 2008 | 8                  |
| 2009 | 9                  |
| 2010 | 0                  |
| 2011 | 1                  |

Note 1 : Some products have alphabet at the end or the first.

| MONTH | FIGURE IN LOT MARK | MONTH | FIGURE IN LOT MARK |
|-------|--------------------|-------|--------------------|
| Jan.  | 01                 | Jul.  | 07                 |
| Feb.  | 02                 | Aug.  | 08                 |
| Mar.  | 03                 | Sep.  | 09                 |
| Apr.  | 04                 | Oct.  | 10                 |
| May   | 05                 | Nov.  | 11                 |
| Jun.  | 06                 | Dec.  | 12                 |

| WEEK<br>(DAY IN CALENDAR) | FIGURE IN LOT MARK |
|---------------------------|--------------------|
| 01~07                     | 1                  |
| 08~14                     | 2                  |
| 15~21                     | 3                  |
| 22~28                     | 4                  |
| 29~31                     | 5                  |

### 12.2 REVISION

| REV No. | ITEM                                       | LOT No. |
|---------|--------------------------------------------|---------|
| -       | CFL I/F Connector :<br>Mitsumi M63M83 - 04 | -       |
| A       | CFL I/F Connector :<br>JAE IL-G-4S-S3C2-SA | 7102T   |

### 12.3 LOCATION OF LOT MARK

on the back side of LCM

4 0 4 2 T

T : Made in Taiwan.

### 13. PRECAUTION FOR USE

13.1 A limit sample should be provided by the both parties on an occasion when the both parties agreed its necessity.

Judgment by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.

13.2 On the following occasions, the handling of the problem should be decided through discussion and agreement between responsible persons of the both parties.

- (1) When a question is arisen in the specifications.
- (2) When a new problem is arisen which is not specified in this specifications.
- (3) When an inspection specifications change or operating condition change in customer is reported to HITACHI, and some problem is arisen in this specification due to the change.
- (4) When a new problem is arisen at the customer's operating set for sample evaluation in the customer site.

The precaution that should be observed when handling LCM have been explained above. If any points are unclear or if you have any request, please contact HITACHI.