

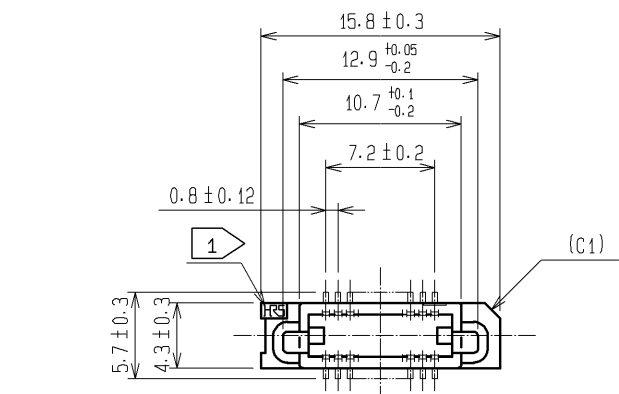


RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS t=0.15)

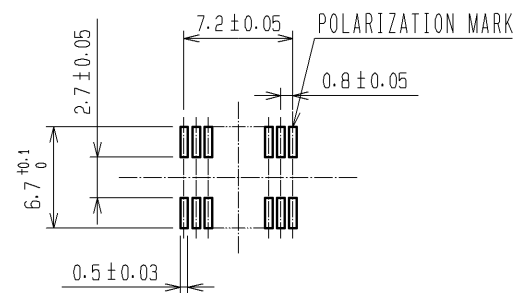

A-A (10:1)

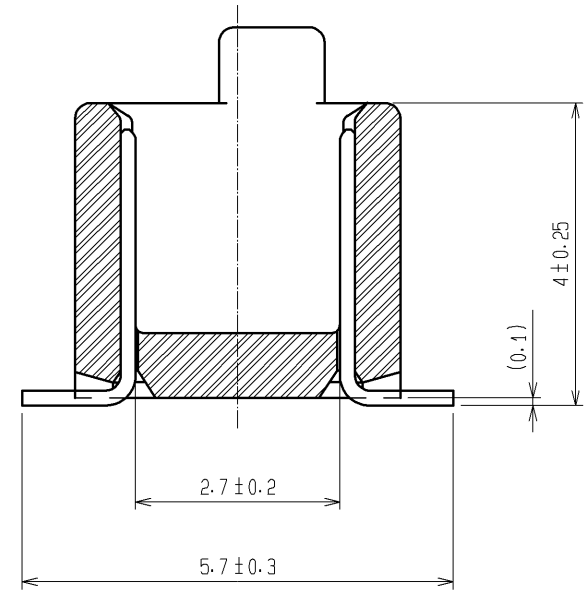

- NOTES
1. HRS MARK SHOULD BE OPTIONAL.
 2. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 3. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 4. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	PPS	LIGHT BROWN	UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.
						LEAD AREA:GOLD FLASH
						UNDER PLATING:NICKEL 1μm min.
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED
		APPROVED : HS. OKAWA	08. 06. 26	DRAWING NO.		EDC3-071314-25
		CHECED : HT. YAMAGUCHI	08. 06. 25	PART NO.		FX6A-20P-0.8SV(71)
		DESIGNED : SY. KAMIGA	08. 06. 23	CODE NO.		CL576-0201-2-71
		DRAWN : TP. MATSUMOTO	08. 06. 18			1/1