

EE-SX770/771/772/870/871/872(A/P/R)


Thin, Compact Photomicrosensor with Attached Cable

- Next generation design available with NPN or PNP output
- Allows standard M3-screw mounting
- Twenty-four models available in standard, L-shaped, and T-shaped
- UL, EMC and CE approvals
- Each model equipped with a flexible cable that conforms to machine contours
- Compact size allows high-density mounting
- Indicators are visible from both sides
- Readily-visible, molded workpiece insertion mark allows fine-tuning of sensing position



Ordering Information


The operation indicator of models with suffix code (A) or (R) will turn ON when the light is interrupted.

Appearance	Sensing method	Sensing distance	Output configuration		Part number
Standard 	Slot	 5 mm (0.2 in) (slot width)	NPN	Dark-ON	EE-SX770
					EE-SX770A
			PNP		EE-SX770P
					EE-SX770R
			NPN	Light-ON	EE-SX870
					EE-SX870A
			PNP		EE-SX870P
					EE-SX870R
L-shaped 			NPN	Dark-ON	EE-SX771
					EE-SX771A
			PNP		EE-SX771P
					EE-SX771R
			NPN	Light-ON	EE-SX871
					EE-SX871A
			PNP		EE-SX871P
					EE-SX871R
T-shaped 			NPN	Dark-ON	EE-SX772
					EE-SX772A
			PNP		EE-SX772P
					EE-SX772R
			NPN	Light-ON	EE-SX872
					EE-SX872A
			PNP		EE-SX872P
					EE-SX872R

Specifications



Item		Through-beam models(slot)							
Output configuration		Dark-ON				Light-ON			
Output type		NPN		PNP		NPN		PNP	
Model		EE-SX770 EE-SX771 EE-SX772	EE-SX770A EE-SX771A EE-SX772A	EE-SX770P EE-SX771P EE-SX772P	EE-SX770R EE-SX771R EE-SX772R	EE-SX870 EE-SX871 EE-SX872	EE-SX870A EE-SX871A EE-SX872A	EE-SX870P EE-SX871P EE-SX872P	EE-SX870R EE-SX871R EE-SX872R
Supply voltage		5 to 24 VDC ± 10%, ripple (p-p): 10% max							
Current consumption	NPN models	35 mA max.							
	PNP models	30 mA max.							
Slot width		5 mm							
Standard target object		Opaque: 2 x 0.8 mm min							
Differential travel		0.025 mm							
Control output		NPN open collector output models: At 5 to 24 VDC: 100 mA load current (I _C) with a residual voltage of 0.8 V max. When driving TTL: 40 mA load current (I _C) with a residual voltage of 0.4 V max. PNP open collector output models: At 5 to 24 VDC: 50 mA load current (I _C) with a residual voltage of 1.3 V max.							
Operation indicator (See Note 1.)		Red LED is ON when the object to be detected is not present							
Response frequency (See Note 2.)		1 kHz							
Light source		GaAs infrared LED with a peak light wavelength of 940 nm							
Protective circuit (See Note 3.)		Overcurrent protection (built-in circuit)							
Ambient illuminance		Sensing surface: 1,000 lx max with fluorescent light							
Ambient temperature	Operating	-25°C to 55°C (-13°F to 131°F)							
	Storage	-30°C to 80°C (-22°F to 176°F)							
Ambient humidity	Operating	5% to 85%							
	Storage	5% to 95%							
Vibration resistance		Destruction: 20 to 2,000 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions							
Shock resistance		Destruction: 500 m/s ² (50G), three times each in X, Y, and Z directions							
Degree of protection		IEC60529 IP60							
Connection method (standard length)		Pre-wired: 2 m							
Casing material		PBT (polybutylene terephthalate)							
Cable material		PVC (polyvinyl chloride resin)							

- Note: 1. The operation indicator of models with suffix code (A) or (R) will turn ON when the light is interrupted.
2. The response frequency is a value obtained when the EE-SX detects a rotating disc with holes in it, as shown to the right.
3. Operates when the load current exceeds the rated value of 100 mA to inhibit a current flow exceeding 120 mA.




Engineering Data

■ SENSING POSITION (EE-SX77/87)

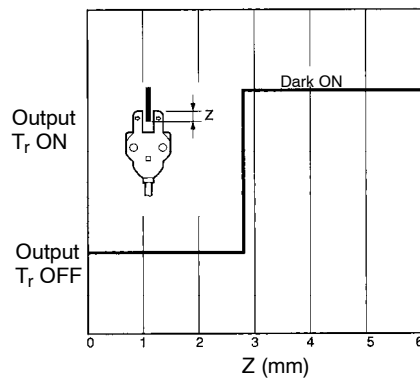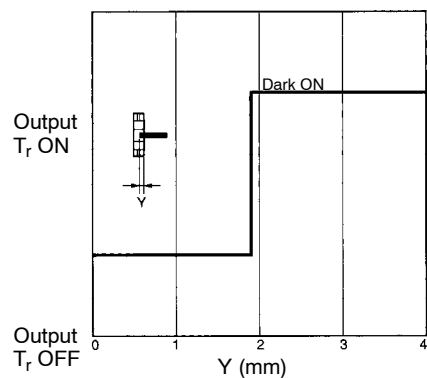

■ REPEATED SENSING POSITION CHARACTERISTICS (TYPICAL)

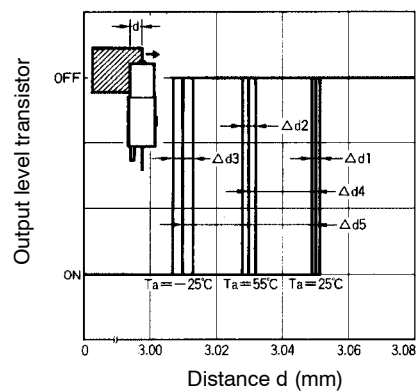

No. of repetitions: 20 at $V_{CC} = 12\text{ V}$

$\Delta d1 = 0.002\text{ mm}$

$\Delta d2 = 0.004\text{ mm}$

$\Delta d3 = 0.005\text{ mm}$

$\Delta d4 = 0.02\text{ mm}$

$\Delta d5 = 0.04\text{ mm}$

Operation

■ OUTPUT CIRCUITS


Output configuration	Model	Output transistor operation	Timing Charts	Output Circuit
NPN Output	EE-SX770 EE-SX771 EE-SX772 EE-SX770A EE-SX771A EE-SX772A	Dark-ON	Incident Interrupted Operation indicator (red) ON OFF Output transistor ON OFF Load (e.g., relay) Operate Reset	
	EE-SX870 EE-SX871 EE-SX872 EE-SX870A EE-SX871A EE-SX872A	Light-ON	Incident Interrupted Operation indicator (red) ON OFF Output transistor ON OFF Load (e.g., relay) Operate Reset	
PNP Output	EE-SX770P EE-SX771P EE-SX772P EE-SX770R EE-SX771R EE-SX772R	Dark-ON	Incident Interrupted Operation indicator (red) ON OFF Output transistor ON OFF Load (e.g., relay) Operate Reset	
	EE-SX870P EE-SX871P EE-SX872P EE-SX870R EE-SX871R EE-SX872R	Light-ON	Incident Interrupted Operation indicator (red) ON OFF Output transistor ON OFF Load (e.g., relay) Operate Reset	

Dimensions

Unit: mm (inch)



STANDARD MODELS

EE-SX770 EE-SX870
 EE-SX770A EE-SX870A
 EE-SX770P EE-SX870P
 EE-SX770R EE-SX870R

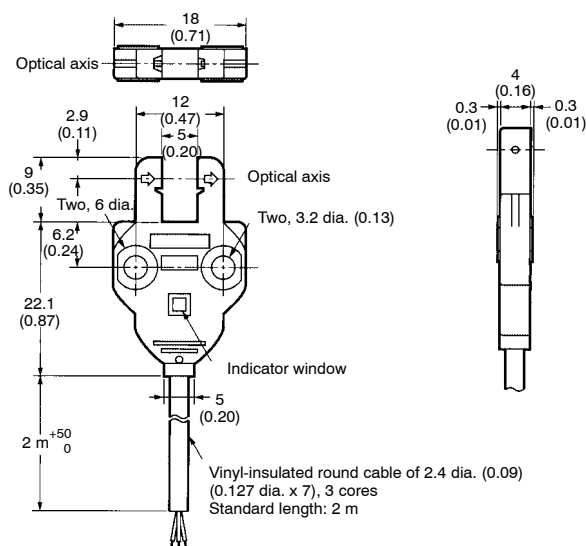



L-SHAPED MODELS

EE-SX771 EE-SX871
 EE-SX771A EE-SX871A
 EE-SX771P EE-SX871P
 EE-SX771R EE-SX871R

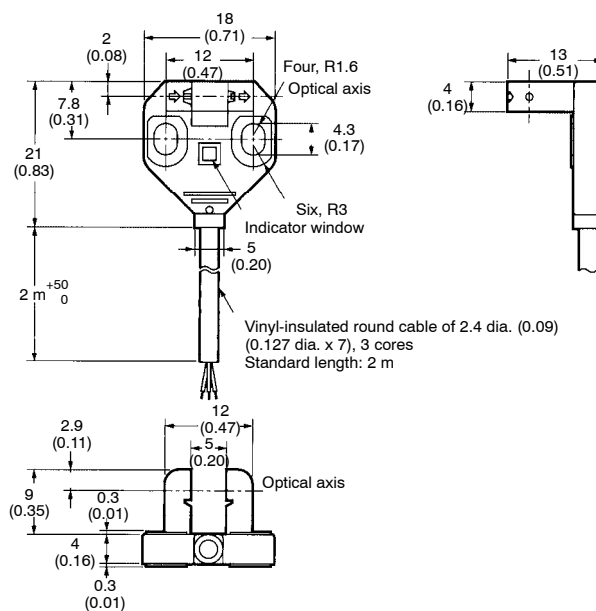

■ T-SHAPED MODELS

EE-SX772	EE-SX872
EE-SX772A	EE-SX872A
EE-SX772P	EE-SX872P
EE-SX772R	EE-SX872R

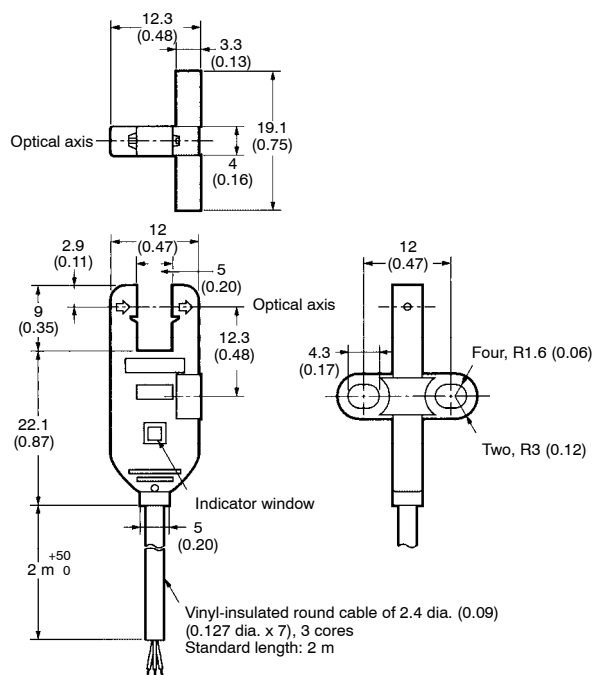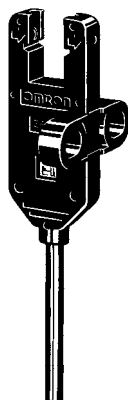

Precautions

■ MOUNTING

- The EE-SX77/87 is a photomicrosensor that should be built into equipment. For this reason, no special protective measures have been taken to protect the EE-SX77/87 from external light disturbance. Avoid malfunction by ensuring that the EE-SX77/87 is not influenced by incandescent lamps or other light sources that may cause external light disturbance.
- Mount the photomicrosensor securely to flat plates. The characteristics of the through-beam sensor change if the slot is deformed.
- Use M3 screws when mounting the EE-SX77/87. Be sure to use spring washers with the screws, so that the screws will not loosen. The tightening torque applied to each screw must be no more than $0.59 \text{ N} \cdot \text{m}$ ($6 \text{ kgf} \cdot \text{cm}$).
- Make sure that nothing will come into contact with the sensing element of the sensor. If the sensing element has scratch damage, the operating characteristics of the photomicrosensor will decrease.
- Securely mount the EE-SX77/87 to prevent loosening by vibration or shock.

■ OPERATING ENVIRONMENT


- *Do not* connect the EE-SX77/87 while power is applied, or the EE-SX77/87 may be damaged.
- *Do not* install the EE-SX77/87 in the following locations to avoid malfunction or damage:
 - A. Locations with excessive dust
 - B. Locations with corrosive gas
 - C. Locations where water, oil, or chemicals are directly sprayed
 - D. Locations exposed to direct sunlight
- Make sure that the operating ambient temperature is within the rated range.
- The photomicrosensor may be soluble in organic solvent, acid, and alkaline, aromatic hydrocarbon, and chlorinated aliphatic hydrocarbon solvents. The characteristics of the photomicrosensor may decrease as a result. Make sure that the photomicrosensor is free from these solutions.




Caution

■ TO AVOID DAMAGE


- Do not use the EE-SX77/87 at voltage exceeding the rated voltage range.

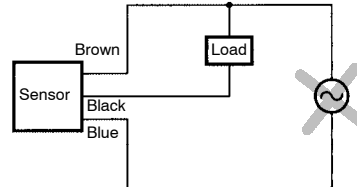

- Do not make mistakes in wiring, such as mistakes in polarity.

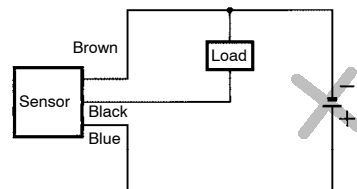


- Do not short-circuit the load (i.e., do not connect a power supply directly to the Sensor) as shown below.

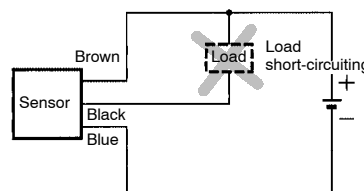


■ WIRING

For Surge Prevention

If the power supply has surge voltage, connect a Zener diode withstanding 30 to 35 V or a 0.1 to 1- μ F capacitor in parallel to the power supply to absorb the surge voltage.

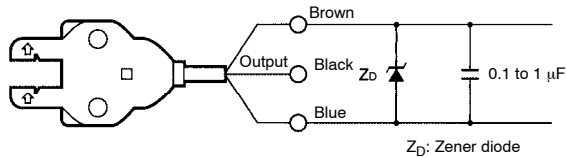


If the load is a relay or other small inductive load, connect it to the EE-SX77/87 as shown below. You must connect a diode for counter-voltage absorption.

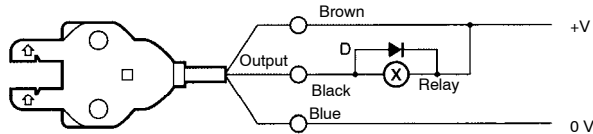

Do not route power lines or high-tension lines in the same conduit with the EE-SX77/87 to avoid damage or malfunction due to induction.

Voltage Output

A photomicrosensor with open collector output can be connected to a device with voltage-input specifications by connecting a resistor between the power supply and output terminals, as shown in the following circuit diagram. The value of the resistor is normally 4.7 k Ω and must withstand a power of 0.5 W at 24 V and 0.25 W at 12 V.

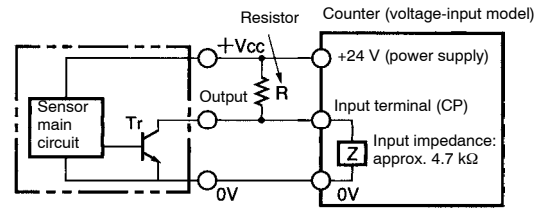

- **EE-SX77/87 series NPN models with a 4.7-k Ω resistor.**


High level:

$$\text{Input voltage (V}_H\text{)} = \frac{Z}{R+Z} V_{CC} = \frac{4.7 \text{ k}}{4.7 \text{ k} + 4.7 \text{ k}} \times 24 \text{ V} = 12 \text{ V}$$

Low level:

$$\text{Input voltage (V}_L\text{)} \leq 0.4 \text{ V}$$

$$\text{Load current (I}_C\text{)} = \frac{V_{CC}}{R} = \frac{24 \text{ V}}{R} = 5.1 \text{ mA} \leq 100 \text{ mA}$$

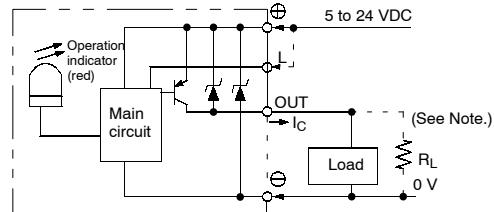

Note: When using a voltage output, always insert a resistor in R_L .

Note: Refer to the ratings of the photomicrosensor for the relationship between the residual voltage and load current.

NOTE: DIMENSIONS SHOWN ARE IN MILLIMETERS. To convert millimeters to inches divide by 25.4.

OMRON[®]
OMRON ELECTRONICS LLC
 One East Commerce Drive
 Schaumburg, IL 60173
1-800-55-OMRON

OMRON ON-LINE
 Global - <http://www.omron.com>
 USA - <http://www.omron.com/oei>
 Canada - <http://www.omron.com/oci>

OMRON CANADA, INC.
 885 Milner Avenue
 Toronto, Ontario M1B 5V8
416-286-6465