



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION , 19 .

© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AF	50					REV AND REDRAWN PER AF-7225	2/4/91	PF/JR

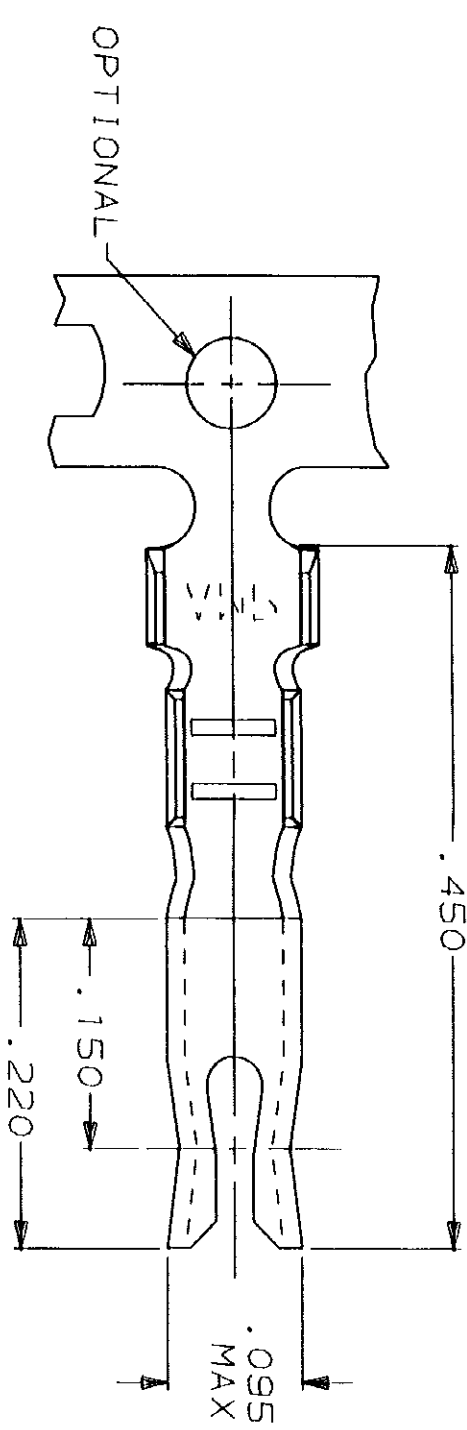

- 1 CONTINUOUS STRIP ON REELS.
- 2 .000030 MIN GOLD PER MIL-G-45204 IN LOCALIZED GOLD PL AREA, GOLD FLASH ON REMAINDER OVER .000050 MIN NICKEL PER QQ-N-290.
- 3 .000080 MIN TIN PL PER MIL-T-10727.

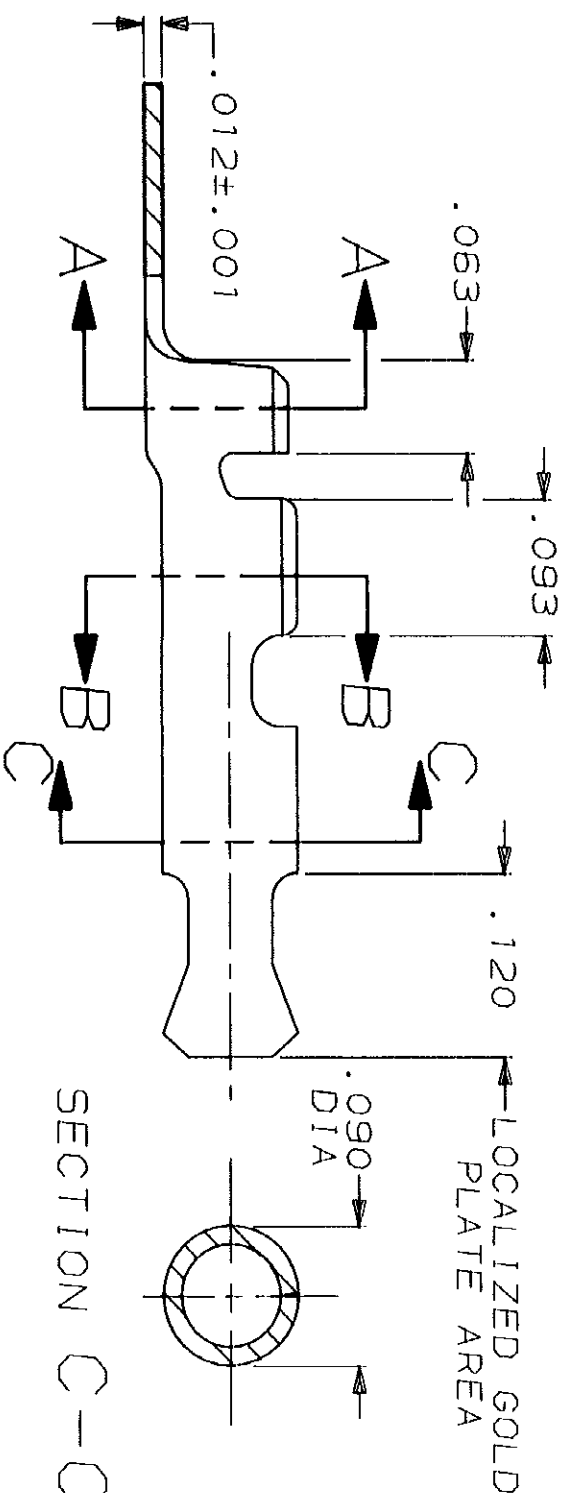

SECTION C-C

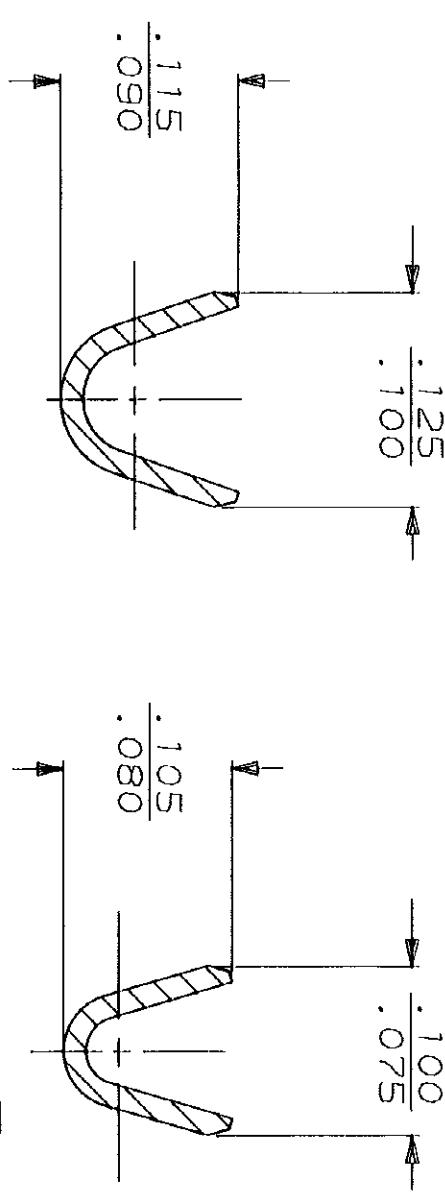

SECTION A-A
SCALE 10:1

SECTION B-B
SCALE 10:1

3		.048-.071		24-20 AWG		60885-2	
2		DIA				60885-1	
FINISH		INSULATION RANGE		WIRE RANGE		PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLG DEC ± .015 3 PLG DEC ± .015 ANGLES		DR 2/4/91 P FORNEY		AMP		AMP Incorporated	
MATERIAL		CHK 2/4/91 JR RUTH		NAME		Harrisburg, PA 17105-3608	
#4 HARD PHOS BRONZE		APPD 2/4/91 G YETTER		RECEPTACLE, PIN, .055 DIA			
FINISH		PRODUCT SPEC		SIZE		CAGE CODE	
SEE TABLE		APPLICATION SPEC		B		00779	
WEIGHT		SCALE		8:1		DRAWING NO	
						60885	
						SHEET	
						1 OF 1	