


# WLS1270 Wireless Module Product Brief



## Overview



The WLS1270 is an ultra-small 2.4 GHz WLAN module. It includes TI's WL1270 SoC, high-efficiency RF front-end circuits, and a DC-DC converter. The module is designed to fit into small spaces, with minimal external circuitry required to complete a radio design. Software is available for Linux and Android.

## Features

- Chipset: Texas Instruments WL1270
- Size: 9 x 8 x 1.4 mm maximum
- IEEE 802.11 b/g and 11n compliant
- IEEE 802.11d,e,h,i,k,r,s compliant
- Embedded ARM microprocessor
- SDIO host interface for WLAN
- Lead-free module construction

## Ordering Information

- Evaluation Kit: DR-WLS1270-EV

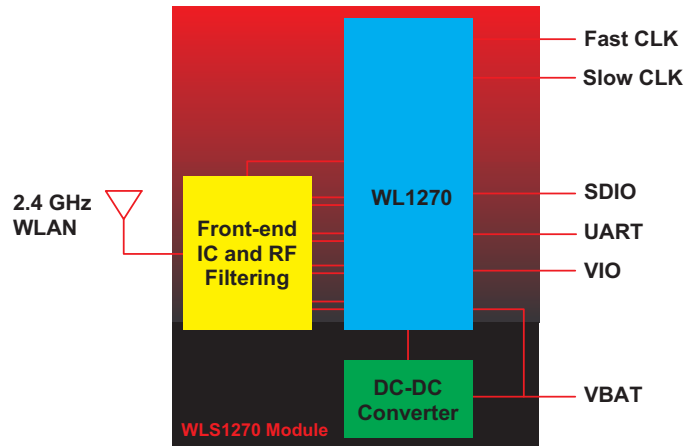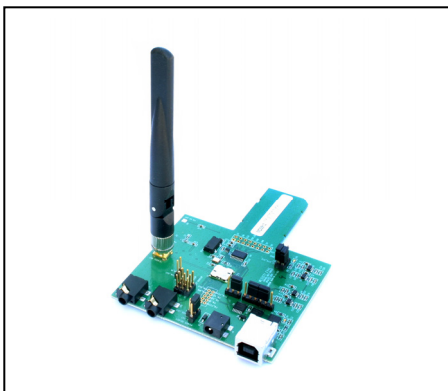

## WLAN

- Data Rates:
  - 802.11n: 65, 58.5, 52, 39, 26, 19.5, 13, 6.5 Mbps
  - 802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps
  - 802.11b: 11, 5.5, 2, 1 Mbps
- Operating Frequency Range: 2.412 to 2.484 GHz
- Output Power: up to 16 dBm
- Supply Current:
  - Transmit - 180 mA
  - Receive - 100 mA

## General

- Operating Temperature Range: -40 to +85 °C
- Relative Humidity: 5 to 95%, non-condensing

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[RFM:](#)

[WLS1270-S](#)