


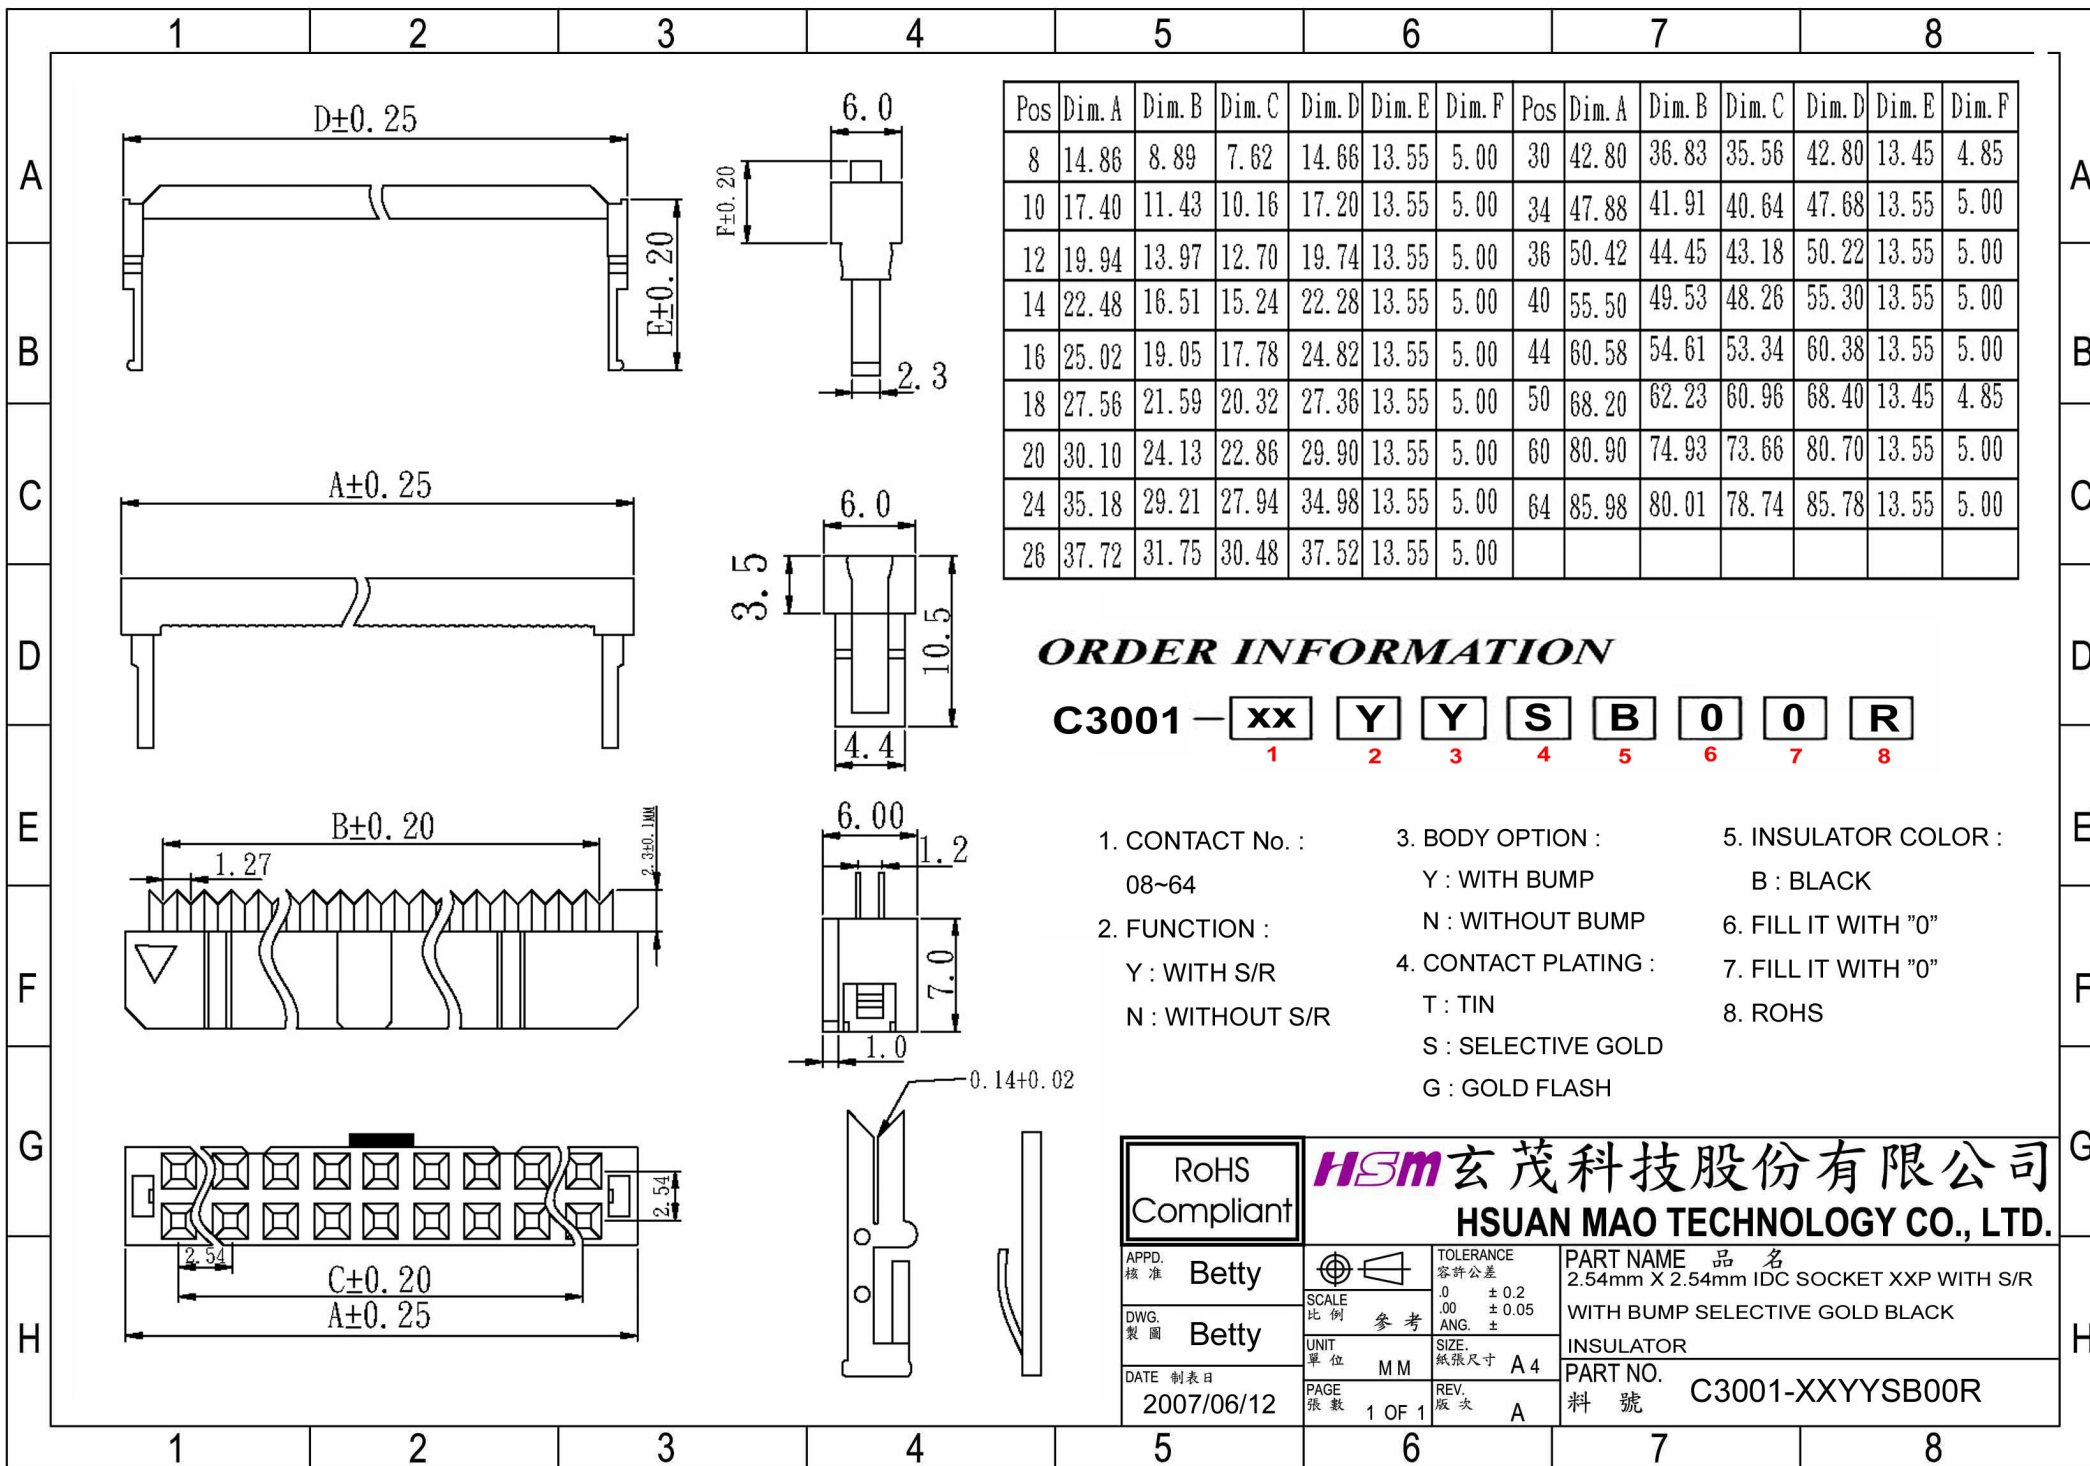

ORDER INFORMATION

C3001 — **xx** **Y** **Y** **S** **B** **0** **0** **R**

1 2 3 4 5 6 7 8

- | | | |
|--|---|---|
| 1. CONTACT No. :
08~64 | 3. BODY OPTION :
Y : WITH BUMP
N : WITHOUT BUMP | 5. INSULATOR COLOR :
B : BLACK |
| 2. FUNCTION :
Y : WITH S/R
N : WITHOUT S/R | 4. CONTACT PLATING :
T : TIN
S : SELECTIVE GOLD
G : GOLD FLASH | 6. FILL IT WITH "0"
7. FILL IT WITH "0"
8. ROHS |

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± 0.2 .00 ± 0.05 ANG. ±	PART NAME 品名 2.54mm X 2.54mm IDC SOCKET XXP WITH S/R WITH BUMP SELECTIVE GOLD BLACK
DWG. 製圖 Betty	UNIT 單位 M M	SIZE. 紙張尺寸 A 4	INSULATOR
DATE 制表日 2007/06/12	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 C3001-XXYYSB00R