


440A Series, 1206 High I^2t Fuse

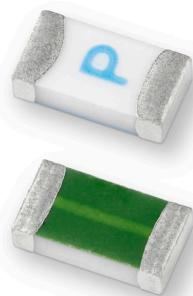

Description

The 440A Series AECQ-Compliant fuses are specifically tested to cater to secondary circuit protection needs of compact auto electronics applications.

The general design ensures excellent temperature stability and performance reliability. This high I^2t fuse series is designed to have ultra high inrush current withstand capability to avoid nuisance fuse open.

Features

- Operating Temperature from -55°C to +150°C
- 100% Lead-free, RoHS compliant and Halogen-free
- Meets Littelfuse's automotive qualifications*
- Ultra high I^2t values
- Fast response to faulty current to ensure over-current protection to sensitive electronic component

* - Largely based on Littelfuse internal AEC-Q200 test plan.

Agency Approvals

AGENCY	AGENCY FILE NUMBER	AMPERE RANGE
	E10480	0.500A - 8A
	29862	0.500A - 8A

Electrical Characteristics for Series

% of Ampere Rating	Ampere Rating	Opening Time at 25°C
100%	.50A - .75A 1.75A - 8A	4 hours, Minimum
350%	.50A - .75A 1.75A - 8A	5 secs., Maximum

Applications

- Li-ion Battery
- LED Lighting
- Automotive Navigation System
- TFT Display
- Battery Management System (BMS)
- Cluster

Additional Information



[Datasheet](#)



[Resources](#)



[Samples](#)

Electrical Specifications by Item

Ampere Rating (A)	Amp Code	Max. Voltage Rating (V)	Interrupting Rating (AC/DC) ¹	Nominal Resistance (Ohms) ²	Nominal Melting I^2t (A ² Sec) ³	Nominal Voltage Drop At Rated Current (V) ⁴	Nominal Power Dissipation At Rated Current (W)	Agency Approvals	
									
0.5	.500	63	50A @ 63VAC/DC	0.8140	0.02642	0.4831	0.242	x	x
0.75	.750	63	50A @ 63VAC/DC	0.4624	0.09312	0.3983	0.299	x	x
1.75	1.75	32	50A @ 32VAC/DC	0.0450	0.3312	0.0777	0.136	x	x
2	002.	32		0.0385	0.4326	0.0792	0.158	x	x
2.5	02.5	32		0.02850	0.8191	0.0747	0.187	x	x
3	003.	32		0.02252	1.232	0.0742	0.223	x	x
3.5	03.5	32		0.01845	1.789	0.0757	0.265	x	x
4	004.	32		0.01553	2.601	0.0709	0.284	x	x
5	005.	32		0.0120	4.761	0.0654	0.327	x	x
7	007.	32		0.00753	8.464	0.0696	0.487	x	x
8	008.	32		0.00634	12.95	0.0655	0.524	x	x

Notes:

1. AC Interrupting Rating tested at rated voltage with unity power factor. DC Interrupting Rating tested at rated voltage with time constant < 0.8 msec.

2. Nominal Resistance measured with < 10% rated current.


3. Nominal Melting I^2t measured at 1msec. opening time.

4. Nominal Voltage Drop measured at rated current after temperature has stabilized.


Devices designed to carry rated current for 4 hours minimum. It is recommended that devices be operated continuously at no more than 80% rated current. See "Temperature Derating Curve" for additional derating information.

Devices designed to be mounted with marking code facing up.

Temperature Rerating Curve

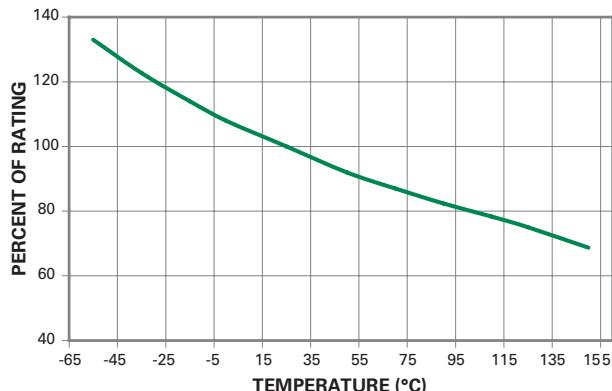

Average Time Current Curves

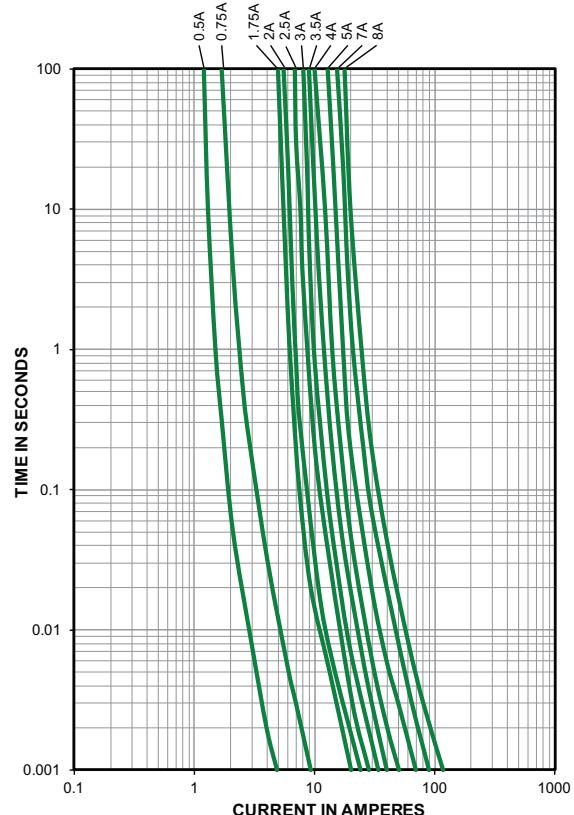

Note:

1. Rerating depicted in this curve is in addition to the standard derating of 20% for continuous operation.

Example:


For continuous operation at 75 degrees celsius, the fuse should be derated as follows:

$$I = (0.80)(0.85)I_{RAT} = (0.68)I_{RAT}$$

Soldering Parameters

Reflow Condition		Pb-free assembly
Pre Heat	-Temperature Min ($T_{s(min)}$)	150°C
	-Temperature Max ($T_{s(max)}$)	200°C
	-Time (Min to Max) (t_s)	60 – 180 seconds
Average Ramp-Up Rate (Liquidus Temp (T_L) to peak)		3°C/second max.
$T_{s(max)}$ to T_L - Ramp-up Rate		5°C/second max.
Reflow	-Temperature (T_L) (Liquidus)	217°C
	-Temperature (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260 ^{+0/-5} °C
Time within 5°C of actual peak Temperature (t_p)		10 – 30 seconds
Ramp-down Rate		6°C/second max.
Time 25°C to peak Temperature (T_p)		8 minutes max.
Do not exceed		260°C

Wave Soldering	260°C, 10 seconds max.
----------------	------------------------

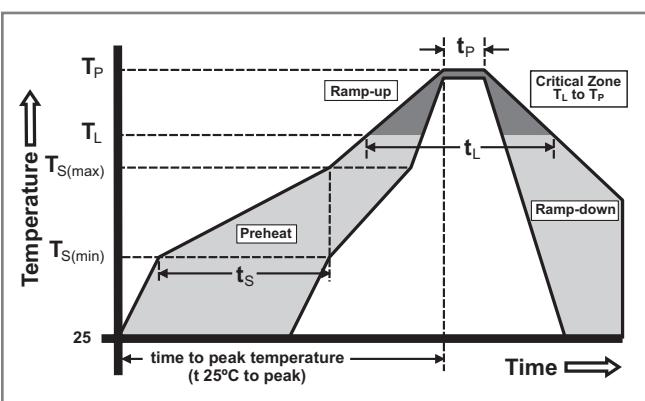


Product Characteristics

Materials	Body: Advanced Ceramic Terminations: Ag / Ni / Sn (100% Lead-free) Element Cover Coating: Lead-free Glass
Moisture Sensitivity Level	IPC/JEDEC J-STD-020, Level 1
Solderability	IPC/ECA/JEDEC J-STD-002, Condition C
Humidity Test	MIL-STD-202, Method 103, Conditions D
Resistance to Solder Heat	MIL-STD-202, Method 210, Condition B
Moisture Resistance	MIL-STD-202, Method 106
Thermal Shock	MIL-STD-202, Method 107, Condition B
Mechanical Shock	MIL-STD-202, Method 213, Condition A
Vibration	MIL-STD-202, Method 201
Vibration, High Frequency	MIL-STD-202, Method 204, Condition D
Dissolution of Metallization	IPC/ECA/JEDEC J-STD-002, Condition D
Terminal Strength	IEC 60127-4

High Temperature Storage	MIL-STD-202, Method 108 with exemptions
Thermal Shock Test	JESD22 Method JA-104, Test Conditions B and N
Biased Humidity	MIL-STD-202, Method 103, 85C/85% RH with 10% operating power for 1000 hrs
Operational Life	MIL-STD-202, Method 108, Test Condition D
Resistance to Solvents	MIL-STD-202, Method 215
Mechanical Shock	MIL-STD-202, Method 213, Test Condition C
High Frequency Vibration	MIL-STD-202, Method 204
Resistance to Soldering Heat	MIL-STD-202, Method 210, Test Condition B
Solderability	JESD22-B102E Method 1
Terminal Strength for SMD	AEC Q200-006
Board Flex	AEC Q200-005
Electrical Characterization	3 Temperature Electrical


Dimensions

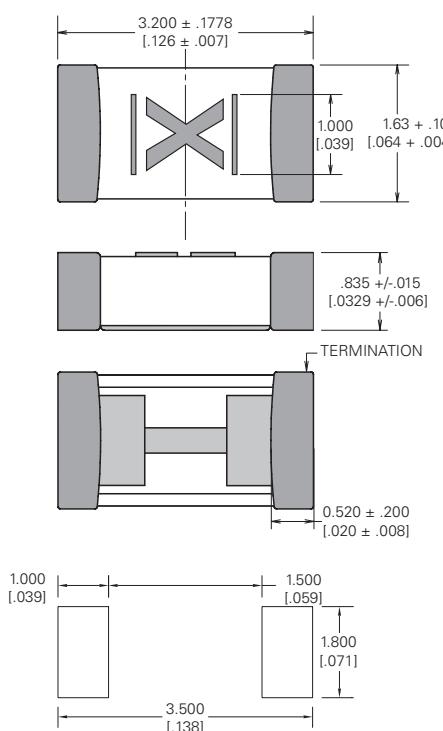

Part Marking System

Amp Code	Marking Code
.500	F
.750	G
1.75	L
002.	N
02.5	O
003.	P
03.5	R
004.	S
005.	T
007.	W
008.	X

Part Numbering System

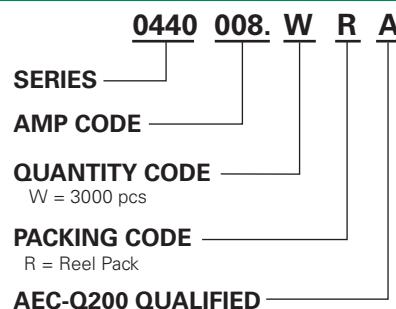

Packaging

Packaging Option	Packaging Specification	Quantity	Quantity and Packaging Code
8mm Tape and Reel	EIA-481, IEC 60286, Part 3	3000	WRA