
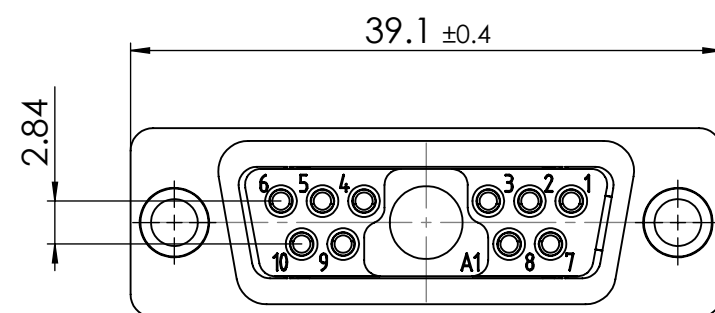
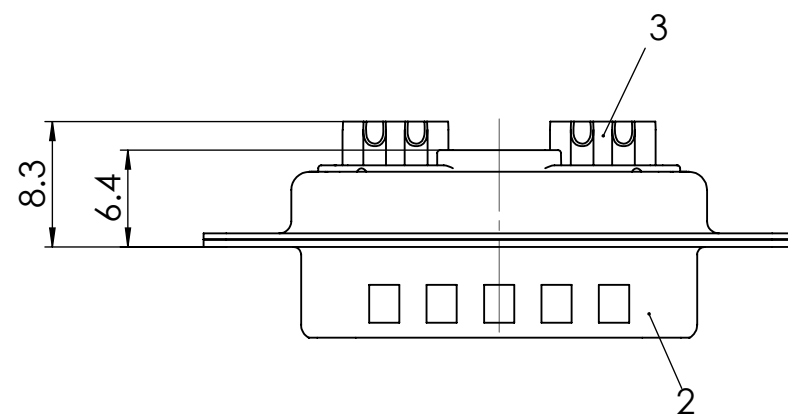
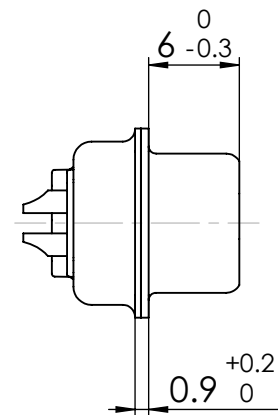


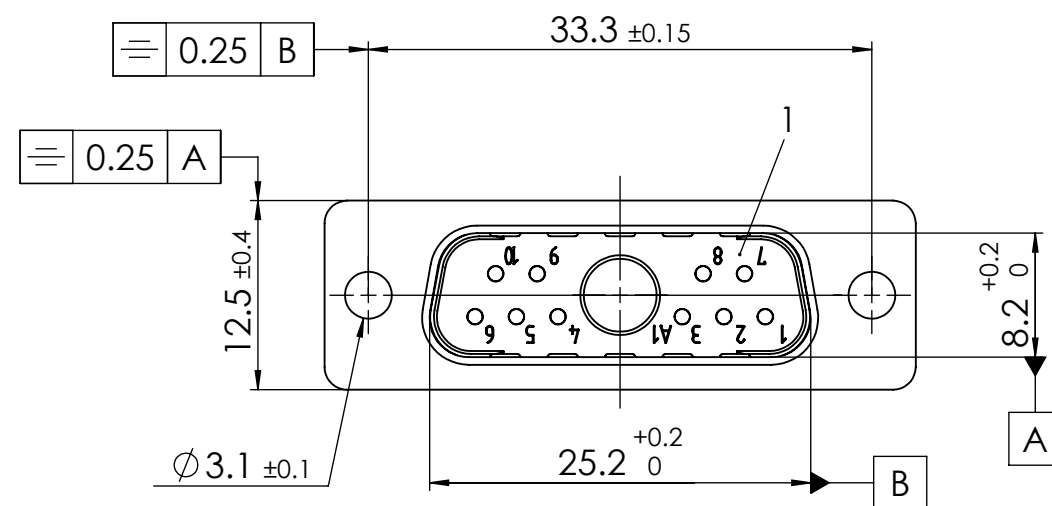

RoHS compliant

3	10	Signal contact	P0 / Brass	AuroPur / AWG 20
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C - +130°C)	green
<i>No.</i>	<i>St.</i>	<i>Part</i>	<i>Type Description/Material</i>	<i>Surface plating/Colour/Class</i>

				Measurement without tolerance occ. to ISO 2768-m	SCALE 2:1	TITLE D-Sub Mixed-Layout Connector			
				NAME / DATE					
				DRAWN	sschref 09-04-2014				
				CHECKED	sschref 09-04-2014				
						DWG.NO. FM11W1PA-K120		REV.	
1									1
REV.	DATE	CH.-NO.	ORIGINAL: DIN A3-DRAWING AS A FILE			REPLACEMENT FOR:	PAGES		

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY,
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.