



Figure 1 is a schematic diagram of a color calibration target. It consists of a vertical oval shape divided into four horizontal sections. The sections are labeled from top to bottom: BLACK, RED, GREEN, and YELLOW. The total height of the oval is indicated as  $4.8 \pm 0.2$ , and the width is indicated as  $2.4 \pm 0.2$ .

| P1 |        | P2 |
|----|--------|----|
| 1  | BLACK  | 4  |
| 2  | RED    | 3  |
| 3  | GREEN  | 2  |
| 4  | YELLOW | 1  |




| P1 |        | P2 |
|----|--------|----|
| 1  | WHITE  | 6  |
| 2  | BLACK  | 5  |
| 3  | RED    | 4  |
| 4  | GREEN  | 3  |
| 5  | YELLOW | 2  |
| 6  | BLUE   | 1  |



| P1 |        | P2 |
|----|--------|----|
| 1  | WHITE  | 8  |
| 2  | ORANGE | 7  |
| 3  | BLACK  | 6  |
| 4  | RED    | 5  |
| 5  | GREEN  | 4  |
| 6  | YELLOW | 3  |
| 7  | BLUE   | 2  |
| 8  | BROWN  | 1  |

\*\*\* CONDUCTOR: [26AWG (0.16/7) BARE COPPER]  
INSULATION: [PP6331 ID:0.95±0.03]  
JACKET: PVC NOUL 65P

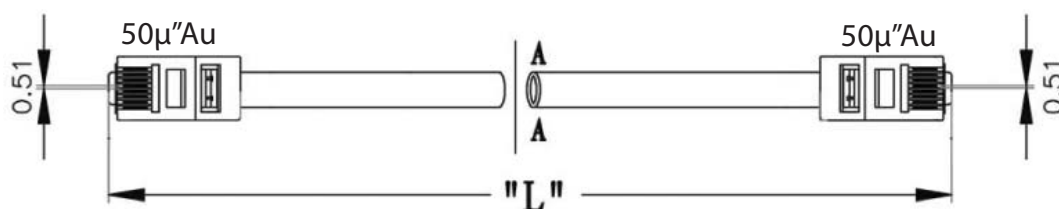

**AT-S-26-x/x/x-x-R**

**Conductors**  
4, 6, 8

— **Length**  
5, 7, 10, 12, 14, 25, 50 Feet

**B** - Black  
**W** - White  
**S** - Silver

| LENGTH "L"            |
|-----------------------|
| Xft +/- x (Xmm +/- x) |
| 5FT (1525 ± 20)       |
| 7FT (2135 ± 30)       |
| 10FT (3050 ± 60)      |
| 12FT (3660 ± 60)      |
| 14FT (4270 ± 60)      |
| 25FT (7625 ± 100)     |

|           |       |  |              |      |      |                                                                                       |          |         |
|-----------|-------|--|--------------|------|------|---------------------------------------------------------------------------------------|----------|---------|
| Scale     | 1:1   |  |              |      |      |                                                                                       |          | Name    |
| TOLERANCE |       |  |              |      |      | Drawn                                                                                 | 11.21.11 | Chappel |
| X.X       | ±0.40 |  |              |      |      | Approved                                                                              |          |         |
| X.XX      | ±0.25 |  |              |      |      |                                                                                       |          |         |
| X.XXX     | ±0.15 |  |              |      |      |                                                                                       |          |         |
| Angle     | ±3°   |  |              |      |      |  |          |         |
|           |       |  |              |      |      |                                                                                       |          |         |
|           |       |  |              |      |      |                                                                                       |          |         |
|           |       |  | Modification | Date | Name |  |          |         |

| Item No. | Item Description | Unit | Quantity | Rate | Amount |
|----------|------------------|------|----------|------|--------|
|----------|------------------|------|----------|------|--------|

**AT-S-26-x/x/x-x-R**

|       |                            |
|-------|----------------------------|
| Title | Standard Double Ended Flat |
|-------|----------------------------|

Drawing No.

rev00

|         |
|---------|
| Replace |
|---------|

|  |       |
|--|-------|
|  | Sheet |
|--|-------|

