



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
A1	-		A2	REVISED PER ECO-11-005301	13APR11	RK HMR

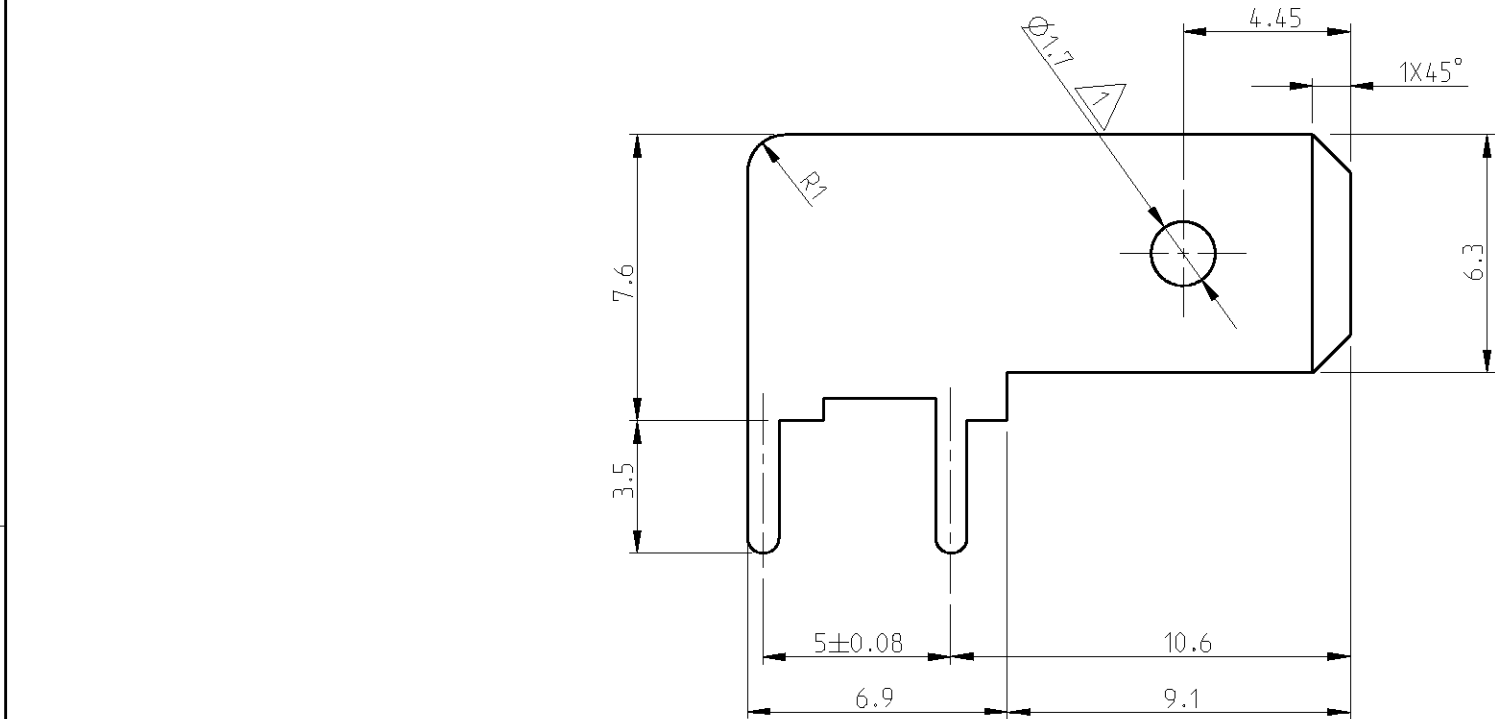



NOTES/BEMERKUNG

- 1 AUSFÜHRUNG 928814-4/-5/-6 OHNE LOCH
EXECUTION 928814-4/-5/-6 WITHOUT HOLE
- 2 3-7 µm Sn ÜBER 0.8 -1.5 µm Ni
3-7 µm Sn OVER 0.8-1.5 µm Ni
- 3 4-8 µm Sn
4-8 µm Sn
- 4 ANLIEFERUNGSZUSTAND: EINZELWARE IN VERSANDKARTON
DELIVERED STATE : LOOSE PIECE IN CORRUGATED SHIPPING BOX
- 5 LEITERPLATTENDICKE NACH EN 60249-2-4. TABELLE 3
PCB-THICKNESS TO EN 60249-2-4. TABLE 3
- 6 OBSOLETE

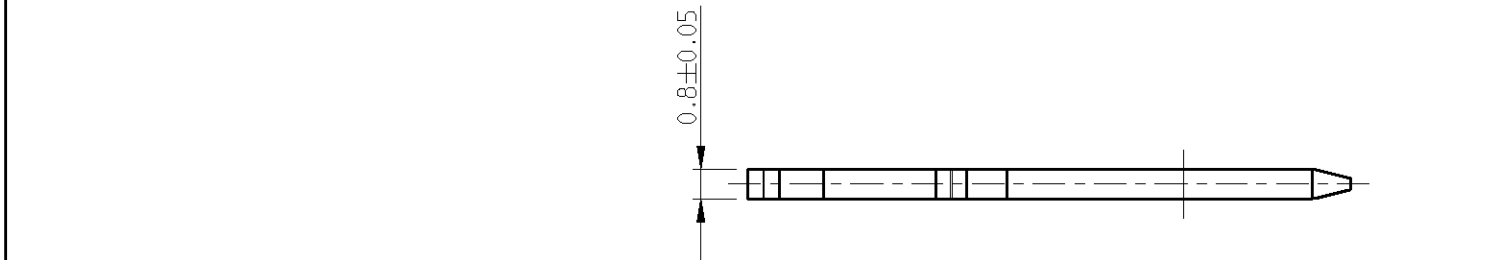

SCALE 1:1

EMPFOHLENES LEITERPLATTEN LOCHBILD
RECOMMENDED PCB HOLE PATTERN

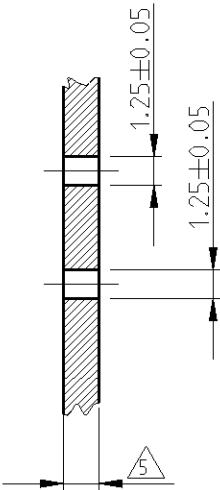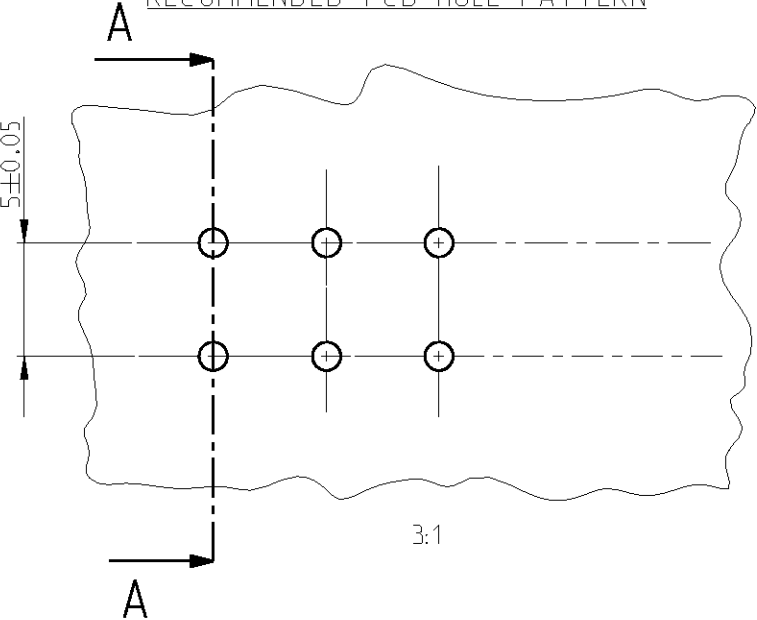

1	BLANK	Cu Zn 30	4	928814-6	A
	3		4	928814-5	A
	2		4	928814-4	A
	BLANK		4	928814-3	A
	3		4	928814-2	A
	2	Cu Zn 30	4	928814-1	A
FINISH		MATERIAL	PART NO		REV

DWN Dhanesh 06-Sep-07 CHK W.Hoffman 04-Okt-07 APVD Gerlach		TE Connectivity			
PRODUCT SPEC - APPLICATION SPEC -		NAME SOLDER TAB 6.3x0.8 FOR PCB			
MATERIAL SEE TABLE		SIZE A3	CAGE CODE	DRAWING NO C=928814	RESTRICTED TO -
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2 ANGLES ±2° FINISH SEE TABLE		WEIGHT -		CUSTOMER DRAWING	
		SCALE 2:1	SHEET 1 OF 1	REV A2	