


DEC Module 24/2 1-Q-EC Amplifier

DIGITAL



The DEC Module 24/2 (Digital EC Controller) is a 1-quadrant amplifier for controlling EC motors with Hall sensors with a maximum output of 48 watts.

Operating modes

Digital speed control or open loop speed control operation can be preset by a digital signal.

Excellent price/performance ratio

Reasonably priced 1-Q-EC amplifier optimised for OEM applications in small appliances.

OEM Module

Miniaturized open electronics board. Two connector arrays arranged in a 2.54 mm (0.1") pattern support easy connectivity and integration into the motherboard.

Functionality

Direction of rotation preset by a digital signal. The motor shaft can be enabled or disabled. Adjustable maximum current limitation. Set value input through external analogue voltage.

Protection circuit


The power amplifier is protected against thermal overload and the control inputs against overvoltage.

Technical data page 290

Dimensions and connections page 292

DEC 24/3 1-Q-EC Amplifier

DIGITAL

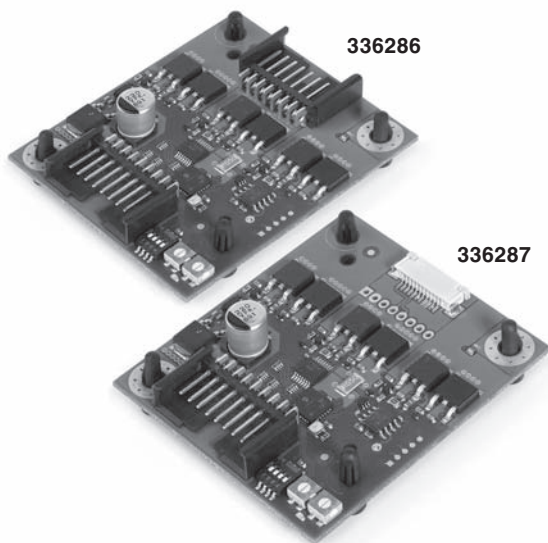

Operating modes

Digital speed control or open loop speed control operation can be selected with a built-in DIP switch.

Flexible

Wide supply voltage range 5 - 24 VDC.

Two variants for direct connection of different maxon EC motors.

Small design

Open and compact electronics board. Easy mounting with hexagonal distance pins with inside thread.

All-round functionality

Direction can be predetermined with a logic signal. Motor shaft can be disabled or slowed down as required. Adjustable maximum current limitation. Status indicator with green LED.

Flexible set value input

Set value input either through internal potentiometer or external, analogue voltage. Different speed ranges can be selected using built-in DIP switches.

The DEC 24/3 (Digital EC Controller) is a 1-quadrant amplifier for controlling EC motors with Hall sensors with a maximum output of 72 watts.


Technical data page 290

Dimensions and connections page 293

DEC Module 50/5 1-Q-EC Amplifier

NEW

DIGITAL



The DEC Module 50/5 (Digital EC Controller) is a 1-quadrant amplifier for controlling EC motors with Hall sensors with a maximum output of 250 watts.

Operating modes

Digital speed control or open loop speed control operation can be preset by a digital signal.

Excellent price/performance ratio

Reasonably priced 1-Q-EC amplifier optimised for OEM applications in small appliances.

OEM Module

Miniaturized open electronics board. Connector arrays arranged in a 2.54 mm (0.1") pattern support easy connectivity and integration into the motherboard.

Functionality

Direction of rotation preset by a digital signal. The motor shaft can be enabled or disabled. Adjustable maximum current limitation. Set value speed input through external analogue voltage. Speed can be monitored through the speed monitor output. Status indicator with «Ready»-Output.

Protection circuit

The power amplifier is protected against thermal overload and the control inputs against overvoltage.

Technical data page 291

Dimensions and connections page 293

DEC 50/5 1-Q-EC Amplifier

DIGITAL



The DEC 50/5 (Digital EC Controller) is a 1-quadrant amplifier for controlling EC motors with Hall sensors with a maximum output of 250 watts.

Operating modes

Digital speed control, open loop speed control or current control can be selected with built-in DIP switch.

Small design

Robust and compact modular metallic housing offers various mounting options.

Easy start-up procedure

Plug-in terminal clamp, no extensive adjustment necessary.

All-round functionality

Direction can be set with a logic signal. Motor shaft can be disabled or slowed down as required. Adjustable maximum current limitation. Operating status display with red and green LED.

Flexible set value input

Set value input either through internal potentiometer or external analogue voltage. Two preset speeds switchable. Speed ramp can be adjusted.

Protection circuit

The power amplifier is protected against thermal overload and the control inputs against overvoltage.

Technical data page 291

Dimensions and connections page 293

1-Q-EC Amplifier Data

DIGITAL

DIGITAL



DECS 50/5 1-Q-EC Amplifier
1-quadrant amplifier for controlling sensorless EC motors with a maximum output of 250 watts.



DEC 24/1 1-Q-EC Amplifier
1-quadrant amplifier for controlling EC motors with Hall sensors with a maximum output of 24 watts.

Operating modes	Speed controller (sensorless)	Speed controller, open loop speed controller
Electrical Data		
Operating voltage V_{CC}	10 - 50 VDC	5 - 24 VDC
Max. output voltage	$0.8 \times V_{CC}$	V_{CC}
Max. output current I_{max}	8 A	2 A
Continuous output current I_{cont}	5 A	1 A
Switching frequency of power stage	50 kHz	39 kHz
Band width current controller		
Max. speed (1 pole pair)	80 000 rpm	120 000 rpm
Built-in motor choke per phase		150 μ H / 1 A
Input		
Set value	«Speed» 0 ... 5 V (1024 Steps)	«Speed» 0 ... 5 V (1024 Steps)
Current limit		
Enable	«Enable» +3.5 ... 50 V	«/Disable» +2.4 ... 24 V
Direction	«Direction» +3.5 ... 50 V	«Direction» +2.4 ... 24 V
Stop / Brake	«Brake» +3.5 ... 50 V	«/Brake» +2.4 ... 24 V
Configurable		
Output		
Monitor	«Monitor n», digital (5 V)	«Monitor n», digital (5 V)
Status reading «Ready»	«Ready» max. +50 V	
Voltage outputs		
Hall sensors supply voltage V_{CC} Hall		4.5 ... 5 VDC, max. 30 mA
Auxiliary voltages	5 VDC	
Possible adjustments	DIP switch	Jumpers
Trim potentiometer	Speed, I_{max}	Speed, I_{max}
Indicator	Green LED = READY; red LED = ERROR	Green LED
Protective functions		
Blockage protection	Switches off after 5 unsuccessful starting attempts	Motor current limitation if motor shaft is blocked for longer than 1.5 s
Heat monitoring of power stage	$T > 90^{\circ}\text{C}$	
Dynamic current limit		$I_{max} = 2 \cdot I_{cont}$ is limited to $0.9 \cdot I_{cont}$ after 1 s
Under- / Overvoltage protection	Switches off when $V_{CC} < 9.5$ V or $V_{CC} > 59$ V	
Temperature range		
Operation	-10 ... +45°C	-10 ... +45°C
Storage	-40 ... +85°C	-40 ... +85°C
No condensation	20 ... 80%	20 ... 80%
Mechanical Data		
Weight	Approx. 40 g	Approx. 20 g
Dimensions (L x W x H)	73,4 x 50,8 x 21 mm (see page 292)	57 x 36 x 24 mm (see page 292)
Mounting threads	4 Hexagonal distance pins with M3 inner thread	4 Hexagonal distance pins with M3 inner thread
Connections	See page 292	See page 292
Order Number		

343253 DECS 50/5 1-Q-EC Amplifier sensorless

DEC 24/1 1-Q-EC Amplifier

318305 DEC 24/1 with FPC pitch 0.5 mm

381510 DEC 24/1 with FPC pitch 0.5 mm

249630 DEC 24/1 with FPC pitch 1.0 mm

249631 DEC 24/1 with a pin con. pitch 2.5 mm

249632 DEC 24/1 with screw type terminal block pitch 2.54 mm

NEW

Accessories

309687 DSR 50/5 Shunt regulator

1-Q-EC Amplifier Data

DIGITAL

DIGITAL



DEC Module 24/2 1-Q-EC Amplifier
1-quadrant amplifier for controlling EC motors with Hall sensors with a maximum output of 48 watts.



DEC 24/3 1-Q-EC Amplifier
1-quadrant amplifier for controlling EC motors with Hall sensors with a maximum output of 72 watts.

Operating modes	Speed controller, open loop speed controller	Speed controller, open loop speed controller
Electrical Data		
Operating voltage V_{CC}	8 - 24 VDC (optional 5.0 VDC)	5 - 24 VDC
Max. output voltage	V_{CC}	V_{CC}
Max. output current I_{max}	3 A	6 A
Continuous output current I_{cont}	2 A	3 A
Switching frequency of power stage	46.8 kHz	39 kHz
Band width current controller		
Max. speed (1 pole pair)	80 000 rpm	120 000 rpm
Built-in motor choke per phase		
Input		
Set value	«Speed» 0 ... 5 V (1024 steps)	«Speed» 0 ... 5 V (1024 steps)
Current limit	«Current Limit» external resistor against GND	
Enable	«Enable» +2.4 ... 24 V	«Enable» +2.4 ... 24 V
Direction	«Direction» +2.4 ... 24 V	«Direction» +2.4 ... 24 V
Stop / Brake		«Brake» +2.4 ... 24 V
Configurable		
Output		
Monitor		«Monitor n», digital, (5 V)
Status reading «Ready»	«Ready», digital, (5 V)	
Voltage outputs		
Hall sensors supply voltage V_{CC} Hall	5 VDC, max. 35 mA	5 VDC, max. 30 mA
Auxiliary voltages		5 VDC, max. 10 mA
Possible adjustments	Input «Mode 0» and «Mode 1»	DIP switch
Trim potentiometer		Speed, I_{max}
Indicator		Green LED
Protective functions		
Blockage protection	Motor current limitation if motor shaft is blocked for longer than 1.5 s	Motor current limitation if motor shaft is blocked for longer than 1.5 s
Heat monitoring of power stage	$T > 95^{\circ}\text{C}$	
Dynamic current limit		$I_{max} = 2 \cdot I_{cont}$ is limited to $0.9 \cdot I_{cont}$ after 1 s
Under- / Overvoltage protection	Switches off when $V_{CC} < 6.5 \text{ V}$ or $V_{CC} > 30 \text{ V}$	Switches off when $V_{CC} < 4.5 \text{ V}$
Ambient temperature / Humidity range		
Operation	-10 ... +45°C	-10 ... +45°C
Storage	-40 ... +85°C	-40 ... +85°C
No condensation	20 ... 80 %	20 ... 80 %
Mechanical Data		
Weight	Approx. 4 g	Approx. 28 g
Dimensions (L x W x H)	24.2 x 20.38 x 12.7 mm (see page 292)	65 x 58 x 18 mm (see page 293)
Mounting threads	mountable on socket terminal strips pitch 2.54 mm	4 Hexagonal distance pins with M3 inner thread
Connections	See page 292	See page 293
Order Number		

367661 DEC Module 24/2 1-Q-EC Amplifier

DEC 24/3 1-Q-EC Amplifier

336287 DEC 24/3 with FPC pitch 1.0 mm

336286 DEC 24/3 with a pin connector pitch 2.5 mm

Accessories

Accessories

370652 DEC Module Eva-Board