

DN6845S

Hall IC (Operating Supply Voltage Range V_{CC} =3.6 to 16V, Operating in One Way Magnetic Field)

Overview

The DN6845S is a semiconductor integrated circuit making use of Hall effects. It is designed particularly for operating at a low supply voltage in one way magnetic field. It is suitable for various sensors and contactless switches.


Features

- Wide range of supply voltage : 3.6 to 16V
- Operating in one way magnetic field
- TTL and MOS ICs directly drivable by output
- Semipermanent service life because of contactless parts
- Drivable with a small magnet
- 4-pin PANAFLAT package (SOH-4D)
- Open collector


Applications

- Speed sensors
- Position sensors
- Rotation sensors
- Keyboard switches
- Microswitches

Note) This IC is not suitable for car electrical equipment.

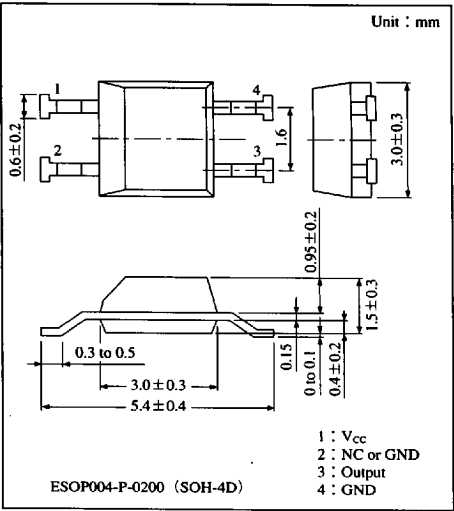

Block Diagram

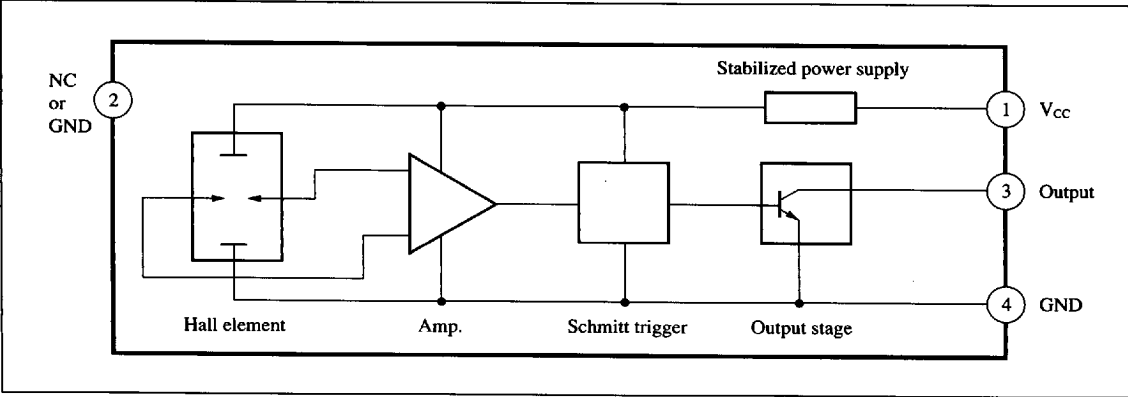

6932852 0013245 526

■ Absolute Maximum Ratings (Ta=25℃)


Parameter	Symbol	Rating	Unit
Supply voltage	V _{CC}	18	V
Supply current	I _{CC}	8	mA
Circuit current	I _O	20	mA
Power dissipation	P _D	100	mW
Operating ambient temperature	T _{opr}	−40 to +85	℃
Storage temperature	T _{stg}	−55 to +125	℃

■ Electrical Characteristics (Ta=25℃)


Parameter	Symbol	Condition	min	typ	max	Unit
Operating flux density	B ₁ (L to H)	V _{CC} =12V	10	—	—	mT
	B ₂ (H to L)	V _{CC} =12V	—	—	60	mT
Low output voltage	V _{OL}	V _{CC} =16V, I _O =12mA, B=60mT	—	—	0.4	V
		V _{CC} =3.6V, I _O =12mA, B=60mT	—	—	0.4	V
High output current	I _{OH}	V _{CC} =16V, V _O =18V, B=10mT	—	—	10	μA
		V _{CC} =3.6V, V _O =18V, B=10mT	—	—	10	μA
Supply current	I _{CC}	V _{CC} =16V	—	—	6	mA
		V _{CC} =3.6V	—	—	5.5	mA

Note 1) Operating supply voltage range V_{CC(opr)}=3.6 to 16V.
Note 2) For the operating flux density, B_{2(H→L)} max 45mT is also available as Rank A.

■ Hall Element Position

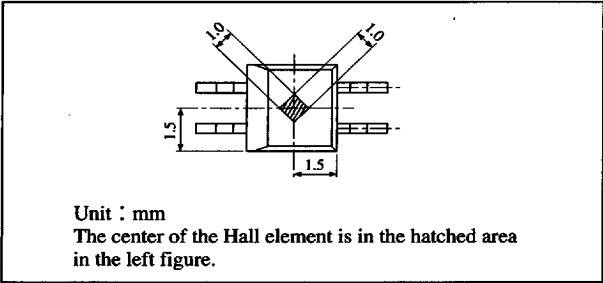

■ Flux-Voltage Conversion Characteristics

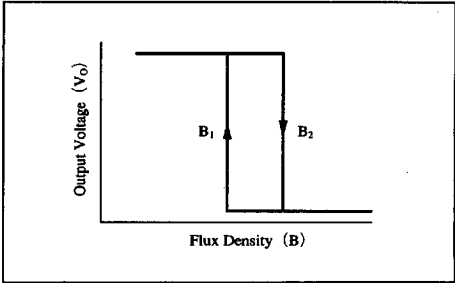

■ Precaution on Use

- 1. Change of the operation magnetic flux density dose not depend on the supply voltage, because the stabilization power supply is built-in. (only for the range ; V_{CC}=4.5 to 16V)
- 2. Change from “H” to “L” level increases the supply current by approx. 1mA.

■ 6932852 0013246 462 ■