

PRODUCT NUMBER

6 4 1 1 1 - X X X - X X X X LF

PLATING

S=15μ"[0.38μm]GOLD
ON CONTACT AREA
120μ"[3.0μm]TIN/LEAD
ON TAIL

G=30μ"[0.76μm]GOLD
ON CONTACT AREA
120μ"[3.0μm]TIN/LEAD
ON TAIL

T=120μ"[3.0μm]TIN/LEAD
(SEE NOTE 9).

LEAD FREE OPTION

S=15μ"[0.38μm]GOLD
ON CONTACT AREA
100μ"[2.54μm] PURE TIN
ON TAIL

G=30μ"[0.76μm]GOLD
ON CONTACT AREA
100μ"[2.54μm] PURE TIN
ON TAIL





T=100μ"[2.54μm] PURE TIN

PIN	STYLE	OAL
11		0.540/13.72
12		0.640/16.26
14		0.740/18.80
16		0.840/21.34
18		0.940/23.88
20		1.040/26.42
22		1.140/28.96
24		1.240/31.50
26		1.340/34.04

	POSITIONS PER ROW	
05	5 POSITIONS	
07	7 POSITIONS	
08	8 POSITIONS	
10	10 POSITIONS	
13	13 POSITIONS	
15	15 POSITIONS	
17	17 POSITIONS	
20	20 POSITIONS	
25	25 POSITIONS	
30	30 POSITIONS	
32	32 POSITIONS	
36	36 POSITIONS	

NOTES:

- HOUSING MAT'L: HIGH TEMPERATURE THERMOPLASTIC. UL94V-0.
- COLOR : BLACK
- PIN MATERIAL: PHOSPHOR-BRONZE
- 3 LBS/1.36 KG MIN. RETENTION.
- TO DETERMINE DIMENSIONS:
N = NUMBER OF POSITIONS PER ROW.
EXAMPLE: 10 POS., (N-1) x .100/2.54=.900/22.86
- PACKAGED IN TRAYS
- STACK HEIGHT TO BE DETERMINED BY CUSTOMER APPLICATION.
EXAMPLE FOR STACKER HIEGHT: 0 5 0 0 = .500 IN.
- TAIL LENGTH IS DETERMINED BY: (OAL)-(STACK HEIGHT)=TAIL LENGTH
- UNDERPLATING: 50μ"/1.27μm Ni.
- PIN TIPS ON TIN/LEAD PLATED PRODUCT MAY HAVE BARE METAL ON TWO SIDES, BOTH ENDS.
- ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
- IF "LF" P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.

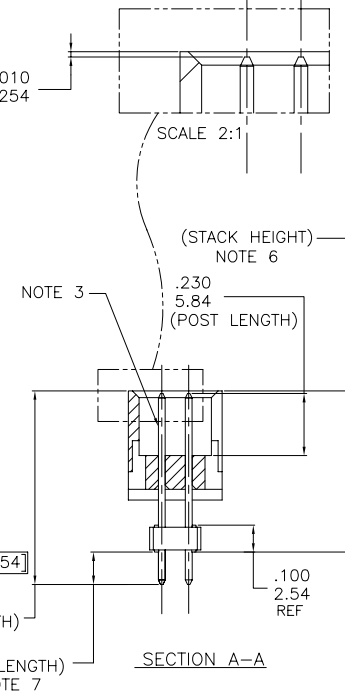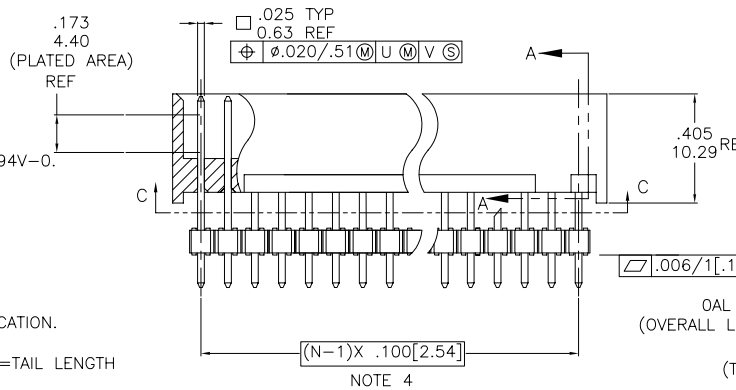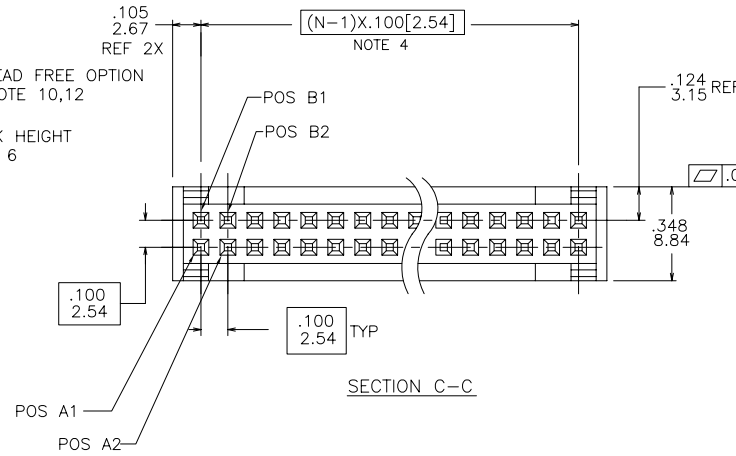

mat'l. code				surface		tolerance		projection		product family	
				ISO 1302 ✓		ISO 406 ISO 1101		INCH/MM		HEADER	
ltr	ecn	no	dr	date	tolerances unless otherwise specified					title	
A	V92814	DAI		8/24/99	angles		.XX±.01/.3			SHOROUDED HDR. .100	
B	V10891	GIP		1/25/02	linear		.XXX±.005/.13			STACK, PCB to PCB	
C	V21476	GIP		9/18/02	0°±2'		.XXXX±.0020/.051			scale 1:1	
D	M05-0089	MHT		5/20/05	dr	D. INGRAM	7/07/99			dwg no	
E	M06-0286	AGS		7/29/06	enr	H. SUNDY	7/20/99			sheet 1 of 1 size	
					chr	H. SUNDY	7/20/99			64111 A3	
					appd	H. SUNDY	7/20/99			type Product Customer Drawing	
sheet		revision		E							
index		sheet		1							