

Description

Tease-free, trip-free, snap action mechanism. Designed for snap-in panel mounting utilising round hole or industry standard fuse-holder cut-out dimensions. Featuring an ergonomically styled two colour actuator with indicator band clearly showing the tripped/OFF position. Approved to CBE standard EN 60934 (IEC 60934): S-type TO CBE

Typical applications

Motors, transformers, solenoids, extra low voltage systems, household and office machines, instrumentation, marine applications, mobile homes.

Ordering information

Type No.

1110 snap in panel mounting

Mounting

F1 panel thickness 0.8...1.6 mm (.031 -.063 in)

F2 panel thickness 1.8...3 mm (.071-.118 in)

Number of poles

1 1-pole protected

Actuator style

2 black push button/white indicator ring, push-push function

Terminal design

P1 blade terminals A6.3-0.8 (QC .250)

Characteristic curve

M1 medium delay

Current ratings

0.05...16A

1110 - F1 1 2 - P1 M1 - 0.05 A = ordering example

Preferred types

Preferred types	Standard current ratings (A)															
	1	1.5	2	3	3.5	4	5	6	7	8	10	15	16			
1110-F112-P1M1-	x	x	x	x	x	x	x	x	x	x	x	x	x	x		
1110-F212-P1M1-	x	x	x	x			x	x			x	x	x			

Standard current ratings and typical internal resistance values

Current rating (A)	Internal resistance (Ω)	Current rating (A)	Internal resistance (Ω)
0.05	442	2	0.25
0.08	173	2.5	0.19
0.1	110	3	0.12
0.2	27.8	3.5	0.09
0.3	12.4	4	0.07
0.4	7.0	5	0.05
0.5	4.5	6	0.04
0.6	3.1	7	≤ 0.02
0.7	2.3	8	≤ 0.02
0.8	1.7	10	≤ 0.02
1	1.1	12	≤ 0.02
1.2	0.71	15	≤ 0.02
1.5	0.41	16	≤ 0.02
1.8	0.38		



1110-F1..

Technical data

For further details please see chapter: Technical Information

Voltage rating AC 250 V; DC 50 V

Current rating 0.05...16 A

Typical life

I _n	operations	U _n	I
0.05...10 A	10,000	AC 250 V	1xI _n
0.05...10 A	10,000	DC 28 V	1xI _n
0.05...10 A	6,000	DC 50 V	1xI _n
12...16 A	2,000	DC 50 V	1xI _n

Ambient temperature -20...+60 °C (-4...+140 °F)

Insulation co-ordination (IEC 60664 and 60664 A) rated impulse withstand voltage 2.5 kV

pollution degree 2
reinforced insulation in operating area

Dielectric strength (IEC 60664 and 60664A) test voltage AC 3,000 V

Insulation resistance > 100 MΩ (DC 500 V)

Interrupting capacity I_{cn} AC 250 V: 0.05...10 A 8 x I_N
DC 50 V: 0.05...6.5 A 10 x I_N
7...16 A 130 A
DC 28 V: 7...10 A 200 A

Interrupting capacity (UL 1077/EN60934 PC 1) I_N U_N
0.05...6 A AC 250 V 1,000 A
7...16 A AC 125 V 1,000 A
0.05...16 A DC 50 V 1,000 A

Degree of protection (IEC 60529/DIN 40050) operating area IP40
terminal area IP00

Vibration 8 g (57-500 Hz) ± 0.61 mm (10-57 Hz), to IEC 60068-2-6, test Fc, 10 frequency cycles/axis

Shock 30 g (11 ms) to IEC 60068-2-27, test Ea

Corrosion 96 hours at 5 % salt mist, to IEC 60068-2-11, test Ka

Humidity 240 hours at 95 % RH to IEC 60068-2-78, test Cab

Mass approx. 12 g


Approvals

Authority	Voltage ratings	Current ratings
VDE	AC 250 V; DC 50 V	0.05...10 A 0.05...16 A
UL/CSA	AC 250 V AC 125 V DC 50 V	0.05...6 A 0.05...16 A 0.05...16 A


Dimensions

1110-F1.. / -F2..


When installing the circuit breaker apply pressure on bezel only.

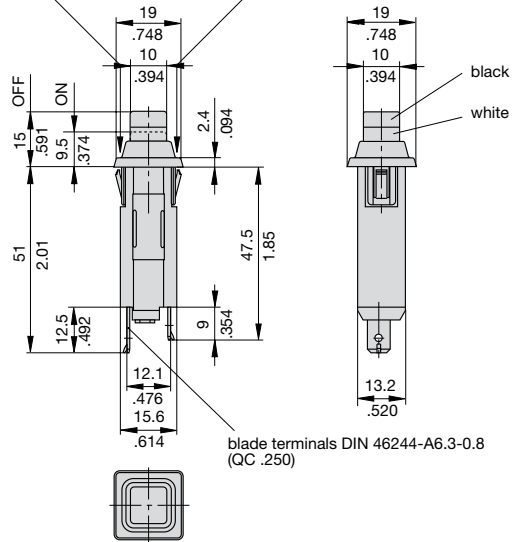

Panel cut out 1110-F1..-P1M1-...A

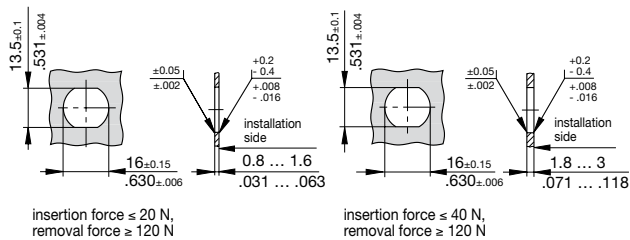


1110-F2..-P1M1-...A




Installation drawing


When installing the circuit breaker apply pressure on bezel only.

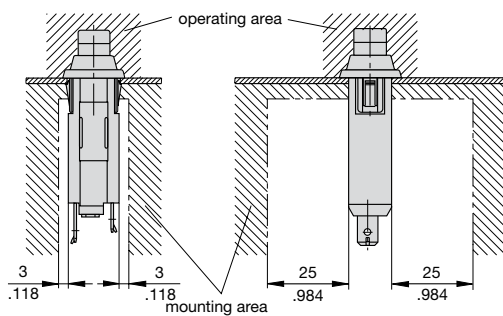

Internal connection diagram



Typical time/current characteristics at +23 °C/+73.4 °F

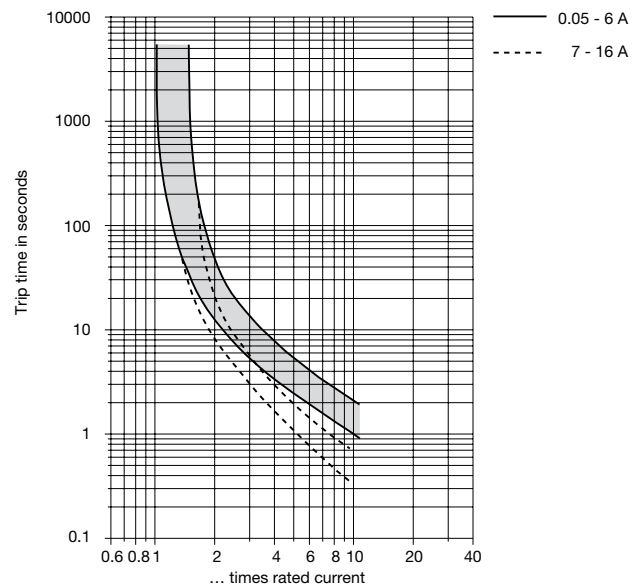


The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section Technical information.

Ambient temperature °F °C	-4 -20	+14 -10	+32 0	+73.4 +23	+104 +40	+122 +50	+140 +60
Derating factor	0.76	0.84	0.92	1	1.08	1.16	1.24


Accessories – Water splash covers (transparent)

Push button splash cover transparent Y 304 745 01 (IP64)

When using splash cover please note that the max. panel thickness is reduced by 0.5 mm/0.02 in.



Terminal shroud Y 305 602 01 (IP64)



This is a metric design and millimeter dimensions take precedence (mm)
inch

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.