


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

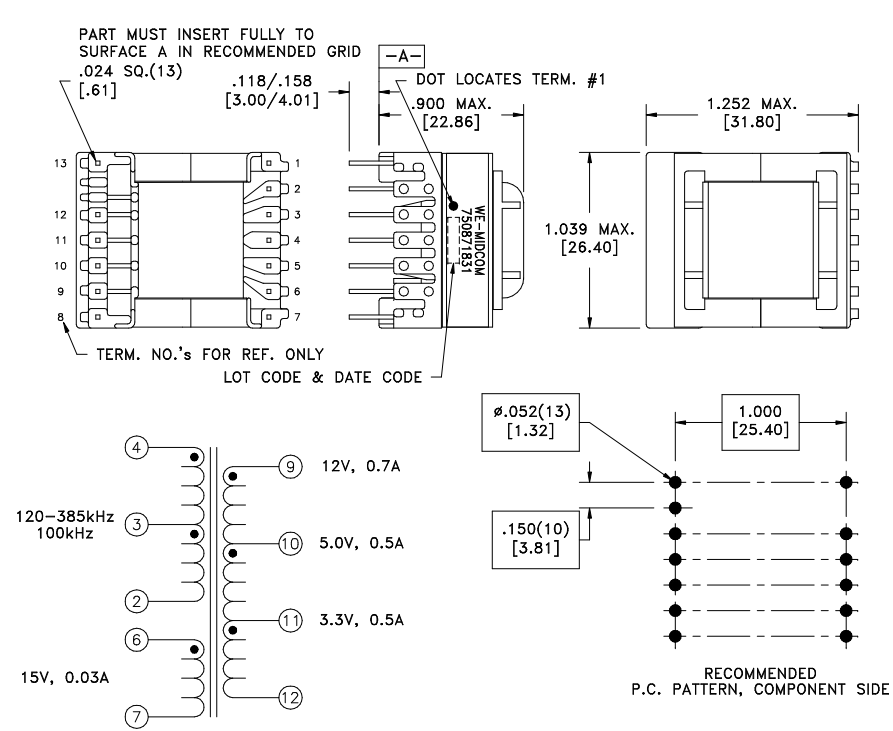

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	4-2	@20°C
D.C. RESISTANCE	6-7	@20°C
D.C. RESISTANCE	9-10	@20°C
D.C. RESISTANCE	10-11	@20°C
D.C. RESISTANCE	11-12	@20°C
INDUCTANCE	4-2	10kHz, 100mVAC, Ls
LEAKAGE INDUCTANCE	4-2	tie(6+7+9+10+11+12), 10kHz, 100mVAC, Ls
DIELECTRIC	2-12	tie(4+6), 4500VAC, 1 second
DIELECTRIC	4-6	1800VAC, 1 second
URNS RATIO		(4-2):(6-7)
URNS RATIO		(4-2):(9-10)
URNS RATIO		(4-2):(10-11)
URNS RATIO		(4-2):(11-12)

REV.	DATE
6A	2/10

Packing Specifications Method: Tray PKG-0504 www.midcom-inc.com	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.001 [.03]	DRAWING TITLE TRANSFORMER eiSos p/n: 750871831	 www.midcom-inc.com	DRAWING NO. 750871831	
	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.			REVISIONS: SEE SHEET 1	SCALE --- SHEET 2 OF 5