

**ARC LS-10055-49**  
**LS-26 Series**  
***Lossy Foam Absorber***

**Description:** Flexible, low density, high loss, carbon impregnated foam. This product is supplied with 3M9425PC high-tack, low-tack adhesive on the back side. The high-tack adhesive surface is applied to the absorber.

**Part Number:** ARC-LS-10055-49

**Standard Thickness:** 0.125" (3.175mm)

**Standard Sheet Size:** 24" x 24" (60.96 x 60.96cm)


**Density:** 5 lbs/cu ft (80 kg/M<sup>3</sup>)

**Resistance:** 300 ohms/sq

**Color:** Black

**Temp. Range:** -70°F to + 250°F (-56.7°C to 121.1°C)

**Insertion Loss 2-18GHz (typical):**

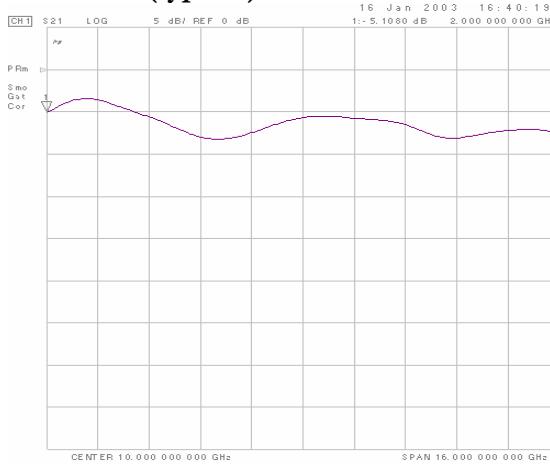

The technical information contained herein is consistent with the properties of this material but should not be used in the preparation of specifications as it is intended for reference only.



***Solutions for Interference Control***

ARC Technologies, Inc.  
11 Chestnut Street, Amesbury, MA 01913  
978-388-2993 Fax: 978-388-6866  
[www.arc-tech.com](http://www.arc-tech.com)