




Our Focus is in Plastics



Polymer Optics Ltd.

6 Kiln Ride, Wokingham,
Berks., RG40 3JL, England
Tel/Fax: +44 (0) 1189 893341
www.polymer-optics.co.uk



+/-6x25 Degree (12x50 Deg) LED Collimator Lens - Part No. 126

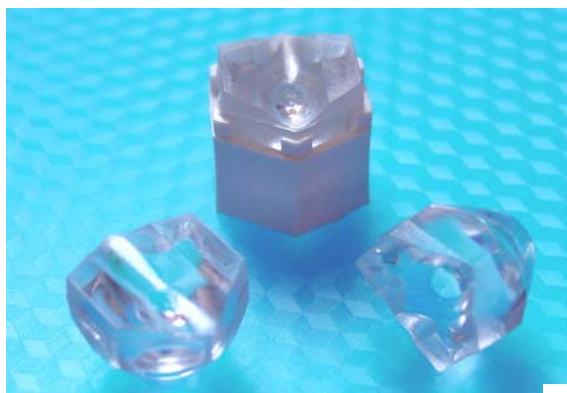




- Designed for LUXEON® I, III and K2 LED's
- High light collection efficiency of >85%
- Suitable for all LUXEON® "Lambertian" and "Bat-wing" LED designs
- Precision moulded in optical grade Polycarbonate for thermal stability and system durability
- Part of the Polymer Optics "Modular LED Optics"® range



Typical dimensional tolerances
to +/-0.2mm

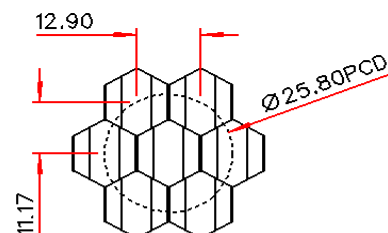

NESTED COMPONENTS ON 25,8MM PCD



Polymer Optics "Modular LED Optics"® design, based on a hexagonal format, allows maximum packing density and assembly flexibility

Holder (Part No. 121) available for mounting optics onto LUXEON® I Star or LUXEON® Emitter PCB's

Star Holder (Part No. 128) available for LUXEON® III Star formats only.

K2 Holder (Part No. 151) available for LUXEON® K2 LED range.

Please refer to POL's "LUXEON® LED Optic Selection Table" to determine your optimum product configuration.




Our Focus is in Plastics

Polymer Optics Ltd.


6 Kiln Ride, Wokingham,
Berks., RG40 3JL, England
Tel/Fax: +44 (0) 1189 893341
www.polymer-optics.co.uk

On-axis illumination using 1W Luxeon
Lambertian White LED typically 120cds

6x25 Degree LED Collimator Lens - Part No. 126

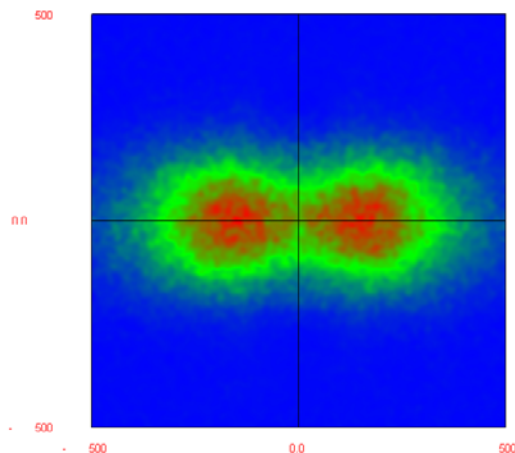

Raytrace Simulation of Typical Beam at
1m with 1W White LED

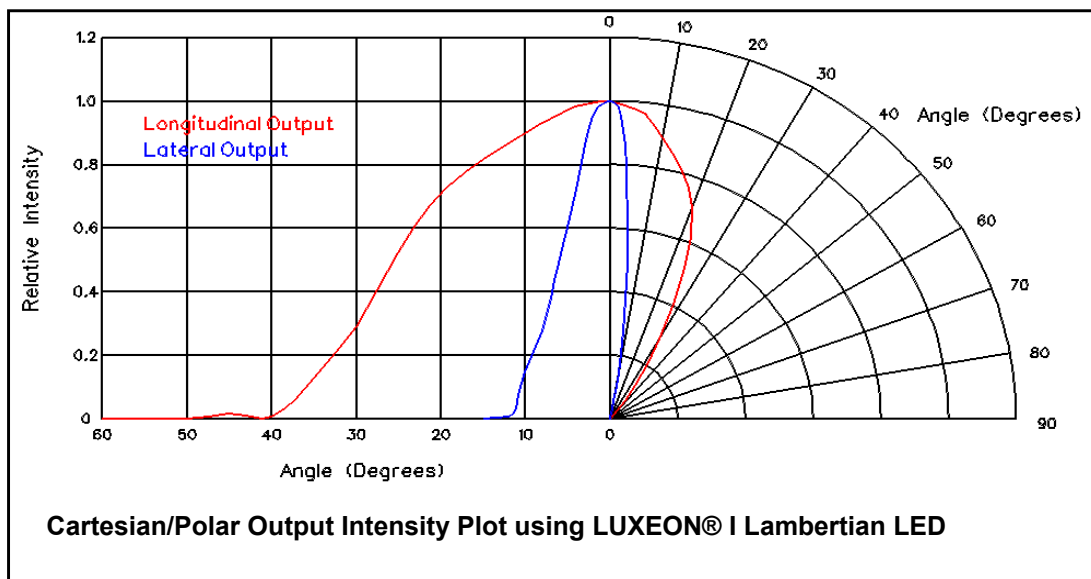

Typical illuminance values using 25 lumen white LUXEON® I Emitter = 8cd/lumen			
Range	0.5m	1m	2m
Illuminance	800 lux	200 lux	50 lux

Performance values given are typical values and will vary dependant on LED binning, colour and drive profile