THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	F2	REVISED PER ECO-12-001377	23JAN12	KH	DR
	F3	REVISED PER ECO-17-004099	29AUG2017	RS	DR

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
4/0 AWG SOLID OR STRANDED	4/0 AWG SOLID OR STRANDED	4/0 AWG SOLID OR STRANDED

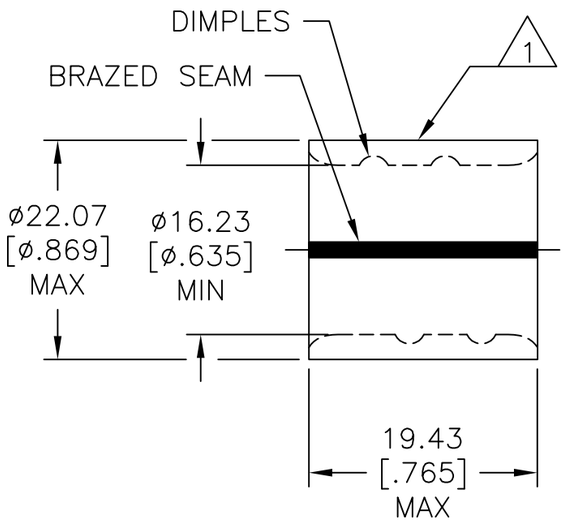

1. STAMP AMP 4/0W* 200 LOCATE APPROX AS SHOWN.
2. MATERIAL THK: 2.59±0.05[.102±.002]
3. TIN PL 0.00254 [.000100] MIN THK PER ASTM B545.
4. NOTE DELETED.
5. NOTE DELETED.
6. STAMP FOR MANUFACTURING LOCATION OR CODE PERMISSIBLE.
7. NOTE DELETED.
8. NOTE DELETED.
9. NOTE DELETED.
10. NOTE DELETED.

FINISH	QTY	PACKAGING TYPE	PART NO.
3	50	LOOSE PIECE	36951

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 170°C [338°F]

VOLTAGE RATING: N/A

CIRCULAR MIL AREA: 96.3-117.0mm²[190,000-231,100] SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± 0.20[.008]
3 PLC	± -
4 PLC	± -
ANGLES	± -

MATERIAL: COPPER PER ASTM B-152

FINISH: SEE TABLE

DWN	DK SCHRUM	5/24/93
CHK	RD HEIM	1/27/94
APVD	JL MECKLEY	1/27/94
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	—	

TE Connectivity

NAME: SPLICE, PARALLEL, SOLISTRAND, 4/0 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-36951	—

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV F3

1470-19 (1/15)