


PANEL THICKNESS		B	L	SCREW PROJECTION		T	PART NUMBER
"A" MIN.	"A" MAX.			P-1	P-2		
.058	.125	.023	.07	.06	.24	.75	47-WO-2X2-Y2
				.12	.31	.81	47-W1-2X2-Y2
				.16	.35	.87	47-W2-2X2-Y2
				.24	.43	.94	47-W3-2X2-Y2
.125	.188	.062	.14	.12	.31	.81	47-WO-2X4-Y2
				.16	.35	.87	47-W1-2X4-Y2
				.24	.43	.94	47-W2-2X4-Y2
				.16	.35	.87	47-WO-2X6-Y2
.188	.250	.125	.20	.24	.43	.94	47-WO-2X6-Y2
				.24	.43	.94	47-WO-2X6-Y2
.250	.312	.188	.26	.24	.43	.94	47-WO-2X8-Y2
				.24	.43	.94	47-WO-2X8-Y2

KNOB: 6262 ALUMINUM, NATURAL OR BLACK ORGANIC COATING.


SCREW: 1008 CASE HARDENED STEEL, ZINC PLATE
CHROMATE PLUS SEALER OR BLACK ORGANIC COATING.
FEERULE: 6061 ALUMINUM, NATURAL.
SPRING: 302 STAINLESS STEEL, PASSIVATED.
RATCHET MECHANISM: HARDENED STEEL, BLACK OXIDE.

1. PREPARE HOLE WITH COUNTERSINK ACCORDING TO THE REQUIRED "B" DIMENSION. RECOMMENDED MIN. DISTANCE FROM EDGE OF PANEL TO THE CENTERLINE OF THE HOLE IS .47.



T-15 TORX®

2. INSERT FASTENER AND FLARE INTO COUNTERSUNK HOLE WITH INSTALLATION TOOL PART No. 47-106 OR 29-47-101-10.
3. HAND TIGHTEN FIRMLY TO ENGAGE THE RATCHET MECHANISM.

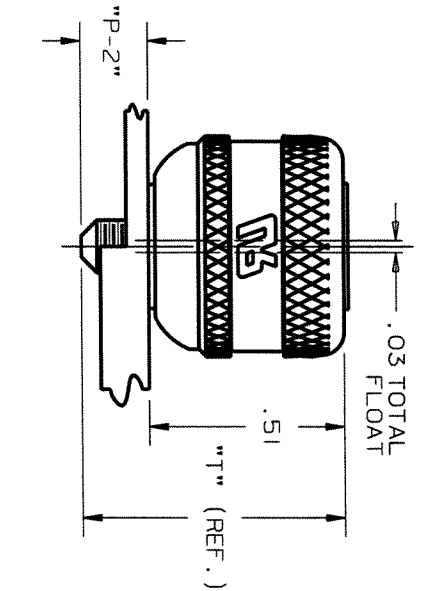

FASTENED