

GBU601 - GBU607

Single Phase 6.0AMPS. Glass Passivated Bridge Rectifiers

GBU

Features

- ✧ UL Recognized File # E-326243
- ✧ Glass passivated junction
- ✧ Ideal for printed circuit board
- ✧ High case dielectric strength of 1500 Vrms
- ✧ Plastic material has Underwriters laboratory flammability Classification 94V-0
- ✧ Typical IR less than 0.1uA
- ✧ High surge current capability
- ✧ High temperature soldering guaranteed: 260°C/10 seconds
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode



Mechanical Data

- ✧ Case: Molded plastic body
- ✧ Terminals: Pure tin plated, lead free, solderable per MIL-STD-202, Method 208
- ✧ Weight: 4 grams
- ✧ Mounting Torque : 5 in. lb. max

Ordering Information (example)

Part No.	Package	Packing	Packing code	Packing code (Green)
GBU601	GBU	20 / TUBE	C2	C2G

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbol	GBU 601	GBU 602	GBU 603	GBU 604	GBU 605	GBU 606	GBU 607	Unit
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current	I _{F(AV)}	6							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	175							A
Rating of fusing (t<8.3ms)	I ² T	127							A ² S
Maximum Instantaneous Forward Voltage (Note 1) @ 3 A @ 6 A	V _F	1.0 1.1							V
Maximum DC Reverse Current @T _A =25°C at Rated DC Block Voltage @ T _A =125 °C	I _R	5 500							uA
Typical Junction Capacitance per leg (Note 2)	C _j	211				94			pF
Typical Thermal Resistance	R _{θJA} R _{θJC}	21 2							°C/W
Operating Temperature Range	T _J	- 55 to + 150							°C
Storage Temperature Range	T _{STG}	- 55 to + 150							°C

Note 1 : Pulse Test with PW=300 usec, 1% Duty Cycle

Note 2 : Measured at 1MHz and applied Reverse bias of 4.0V DC

RATINGS AND CHARACTERISTICS CURVES (GBU601 THRU GBU607)

FIG.1 FORWARD CURRENT DERATING CURVE

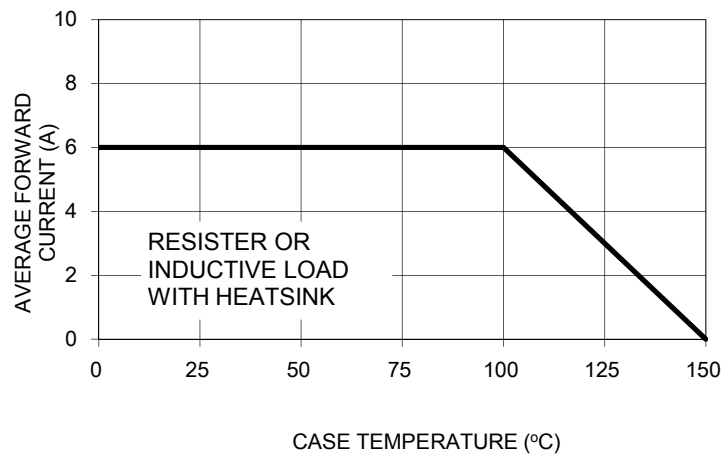


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

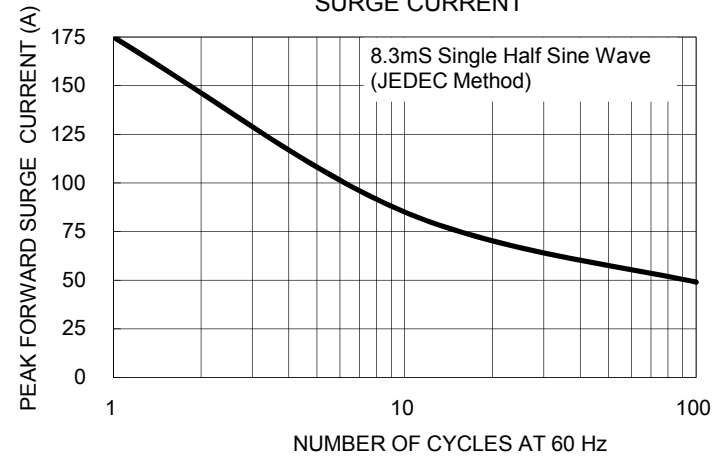


FIG. 3 TYPICAL REVERSE CHARACTERISTICS

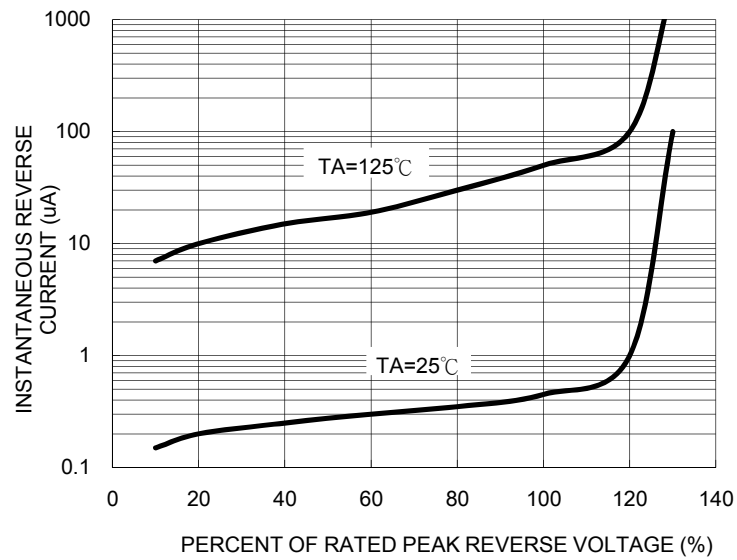


FIG. 4 TYPICAL FORWARD CHARACTERISTICS


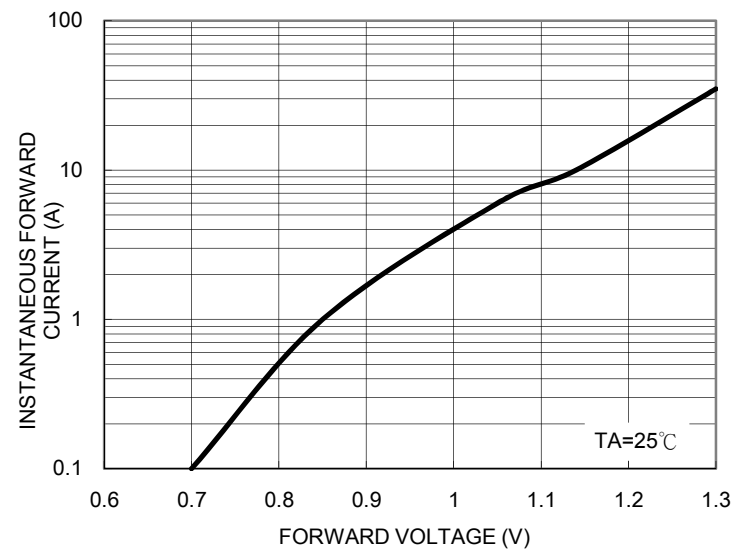


FIG. 5 TYPICAL JUNCTION CAPACITANCE

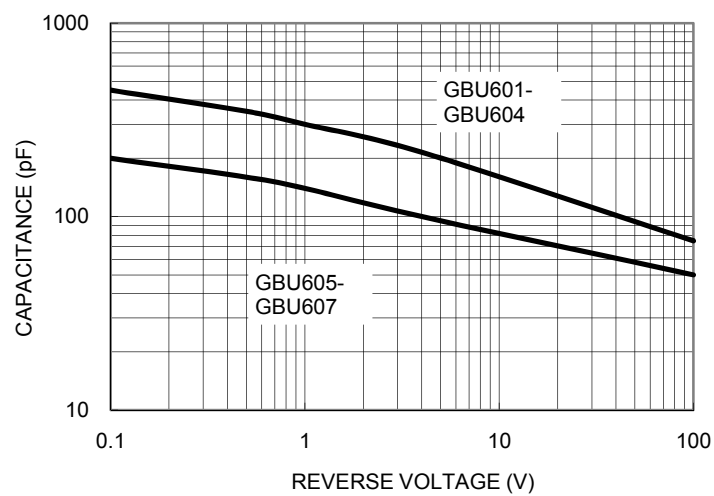


Ordering information

Part No.	Package	BULK Packing	Packing code	Packing code (Green)
GBU60x	GBU	20 / TUBE	C2	C2G
	GBU	20 / TUBE	X0	X0G
	GBU	20 / TUBE	D2	D2G
	GBU	Forming	X2	X2G


Note: "x" is Device Code from "1" thru "7".

Dimensions

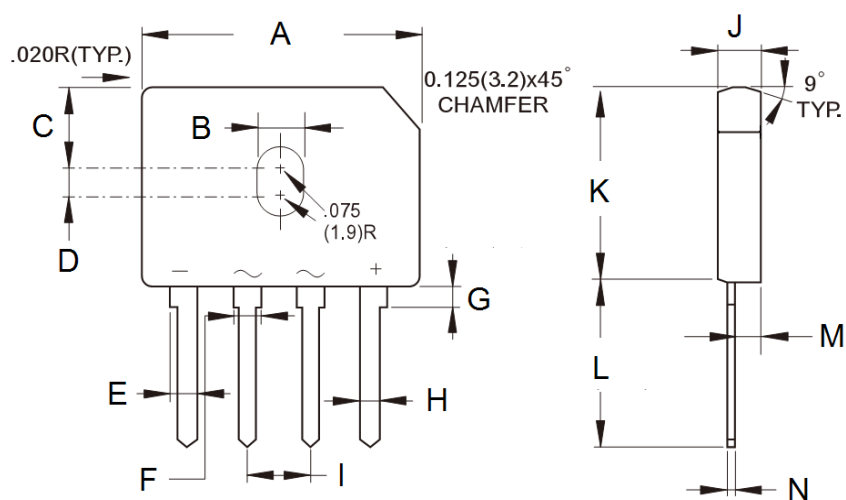

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	21.80	22.30	0.858	0.878
B	3.50	4.10	0.138	0.161
C	7.40	7.90	0.291	0.311
D	1.65	2.16	0.065	0.085
E	2.16	2.54	0.085	0.100
F	1.65	2.03	0.065	0.080
G	1.52	2.03	0.060	0.080
H	1.02	1.27	0.040	0.050
I	4.83	5.33	0.190	0.210
J	3.30	3.56	0.130	0.140
K	18.30	18.80	0.720	0.740
L	17.50	18.00	0.689	0.709
M	1.90	2.16	0.075	0.085
N	0.46	0.56	0.018	0.022

Marking Diagram



P/N = Specific Device Code
 G = Green Compound
 YWW = Date Code
 F = Factory Code