

POSITIONS/ CONTACTS	A		B		C	
	INCH	MM	INCH	MM	INCH	MM
03/06	0.157	4.00	0.260	6.60	0.079	2.00
04/08	0.236	6.00	0.339	8.60	0.157	4.00
05/10	0.315	8.00	0.417	10.60	0.236	6.00
06/12	0.394	10.00	0.496	12.60	0.315	8.00
07/14	0.472	12.00	0.575	14.60	0.394	10.00
08/16	0.551	14.00	0.654	16.60	0.472	12.00
09/18	0.630	16.00	0.732	18.60	0.551	14.00
10/20	0.709	18.00	0.811	20.60	0.630	16.00
11/22	0.787	20.00	0.890	22.60	0.709	18.00
12/24	0.866	22.00	0.969	24.60	0.787	20.00
13/26	0.945	24.00	1.047	26.60	0.866	22.00
14/28	1.024	26.00	1.126	28.60	0.945	24.00
15/30	1.102	28.00	1.205	30.60	1.024	26.00
16/32	1.181	30.00	1.283	32.60	1.102	28.00
17/34	1.260	32.00	1.362	34.60	1.181	30.00
18/36	1.339	34.00	1.441	36.60	1.260	32.00
19/38	1.417	36.00	1.520	38.60	1.339	34.00
20/40	1.496	38.00	1.598	40.60	1.417	36.00
21/42	1.575	40.00	1.677	42.60	1.496	38.00
22/44	1.654	42.00	1.756	44.60	1.575	40.00
23/46	1.732	44.00	1.835	46.60	1.654	42.00
24/48	1.811	46.00	1.913	48.60	1.732	44.00
25/50	1.890	48.00	1.992	50.60	1.811	46.00
26/52	1.969	50.00	2.071	52.60	1.890	48.00
27/54	2.047	52.00	2.150	54.60	1.969	50.00
28/56	2.126	54.00	2.228	56.60	2.047	52.00
29/58	2.205	56.00	2.307	58.60	2.126	54.00
30/60	2.283	58.00	2.386	60.60	2.205	56.00
31/62	2.362	60.00	2.465	62.60	2.283	58.00
32/64	2.441	62.00	2.543	64.60	2.362	60.00
33/66	2.520	64.00	2.622	66.60	2.441	62.00
34/68	2.598	66.00	2.701	68.60	2.520	64.00
35/70	2.677	68.00	2.780	70.60	2.598	66.00
36/72	2.756	70.00	2.858	72.60	2.677	68.00
37/74	2.835	72.00	2.937	74.60	2.756	70.00
38/76	2.913	74.00	3.016	76.60	2.835	72.00
39/78	2.992	76.00	3.094	78.60	2.913	74.00
40/80	3.071	78.00	3.173	80.60	2.992	76.00

PART NUMBER CODING

NPPNxx2GFNx-RC



MOUNTING STYLES

P - SURFACE MOUNT W/ GUIDE POSTS.
S - SURFACE MOUNT W/O GUIDE POSTS.

NUMBER OF POSITIONS

(CONTACTS PER ROW, 3 THRU 40)

REVISONS				
REV.	ECO. NO	DESCRIPTION	DATE	BY
A	644	INITIAL RELEASE	6/15/2005	TT
B	747	UPDATE DIMS	10/3/2005	TT
C	789	CHANGED 2.80 TO 2.95	10/27/2005	TT
D	1811	UPDATE FRONT & TOP VIEWS, PCB LAYOUT, TOP/BOTTOM ENTRY NOTE, POSI. CHART, TOLERANCE, DIA. 1mm POST WAS .8 SQ.	1/09/09	JH

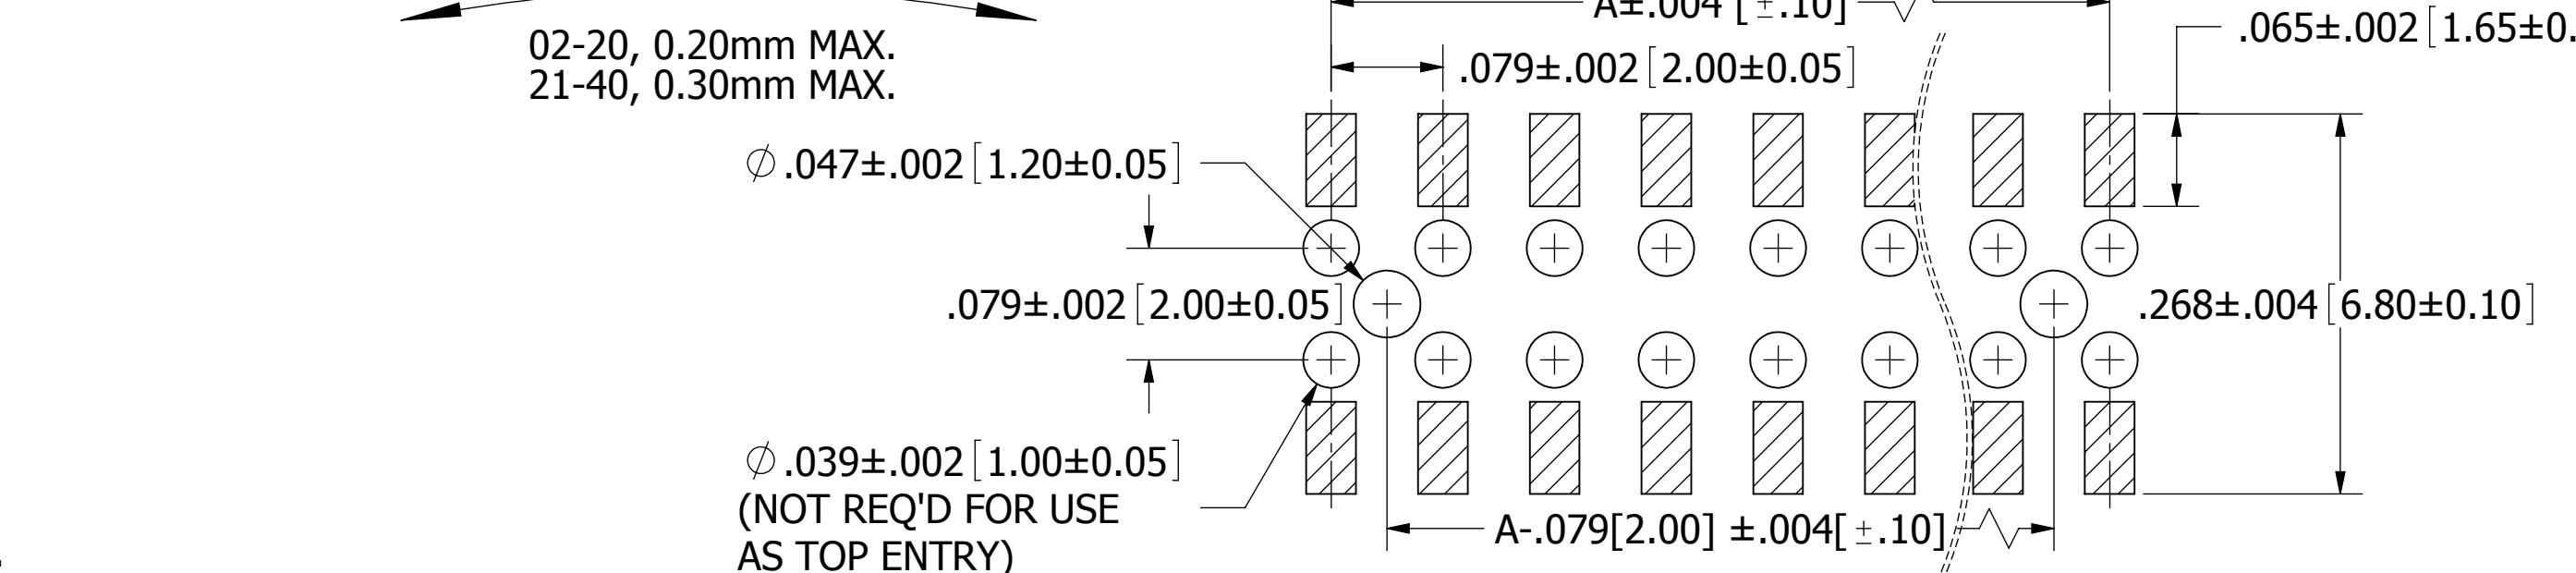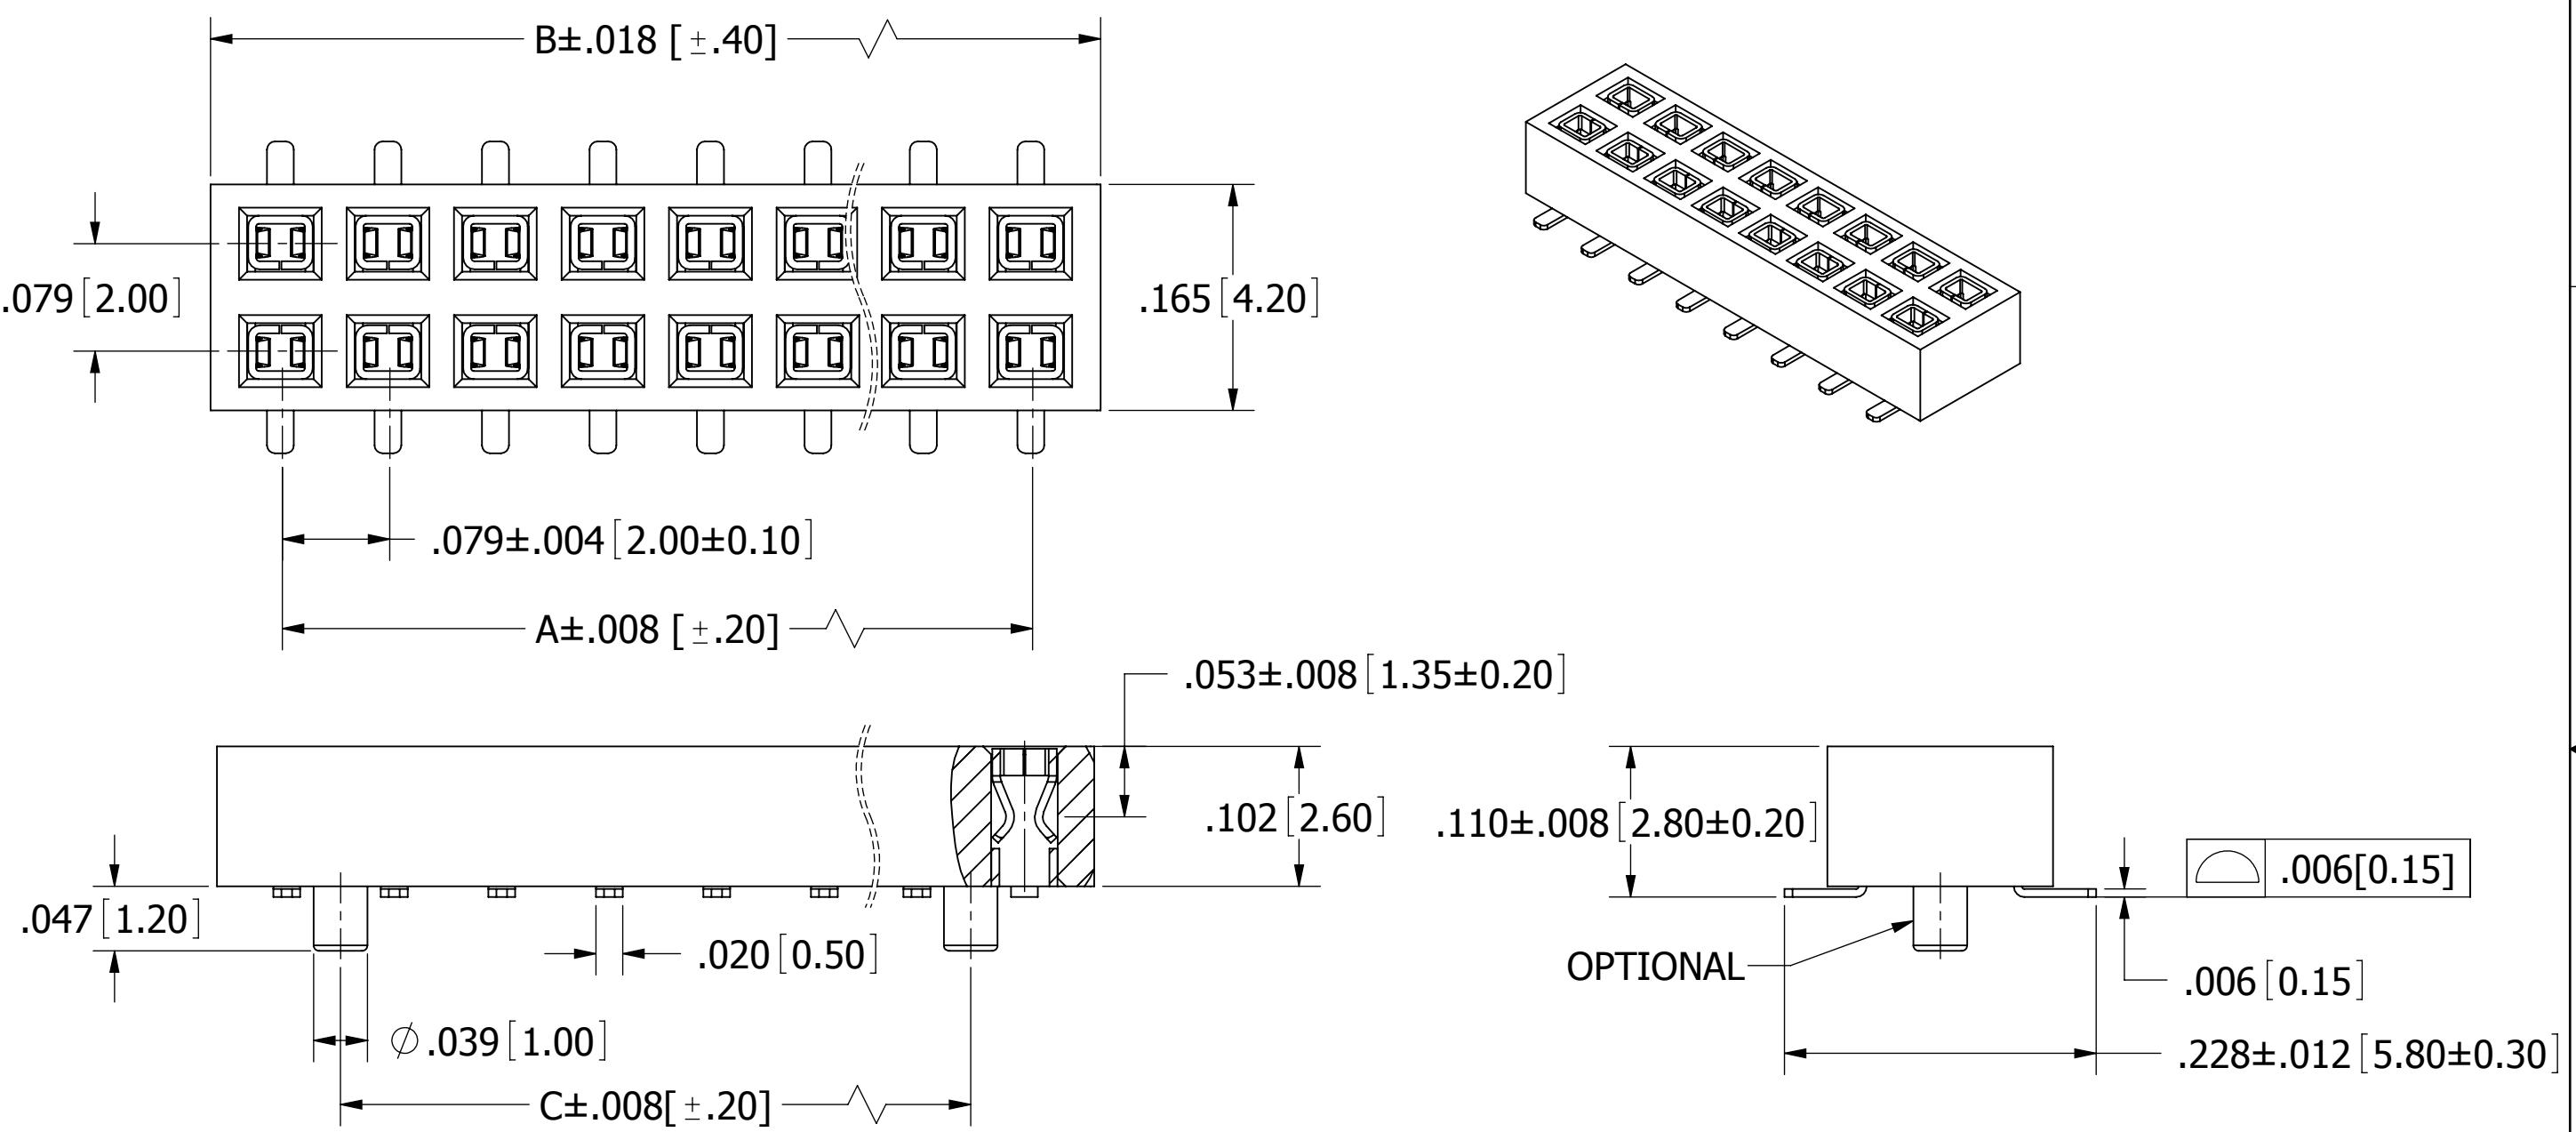

RECOMMENDED PCB LAYOUT



RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES[MM]	DATE	NAME
TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.	DRAWN	1/1/09 JH
THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.		
PART NUMBER NPPNxx2GFNx-RC		
SIZE	DWG. NO.	REV
C	10484	D
SCALE: NTS		SHEET 1 OF 1

NOTES:

1. INSULATOR MATERIAL: NYLON 6T, UL 94V-0.
2. CONTACT MATERIAL: PHOSPHOR BRONZE.
3. CONTACT PLATING: GOLD FLASH OVERALL.
4. CURRENT RATING: 1 AMP.
5. INSULATOR RESISTANCE: 5000 MEGOHMS MIN.
6. CONTACT RESISTANCE: 20 MILLIOHMS MAX.
7. DIELECTRIC WITHSTANDING: AC 500V.
8. OPERATING TEMPERATURE: -40° C TO +105° C.
9. *PROCESSING TEMP.: 260° C FOR 10 SECS MAX.
10. TOP/BOTTOM ENTRY.

*INDICATED TEMPERATURE AND TIME IS FOR COMPONENT INSULATOR. HIGHER PROCESSING TEMPERATURES MAY BE USED, PROVIDED HEAT IS APPLIED FROM BACK SIDE OF PCB, AND INSULATOR DOES NOT EXCEED INDICATED TEMPERATURE AND TIME.