



UNCONTROLLED DOCUMENT

PART NUMBER		REV.
OCP-PCT4216/X-TR		
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE

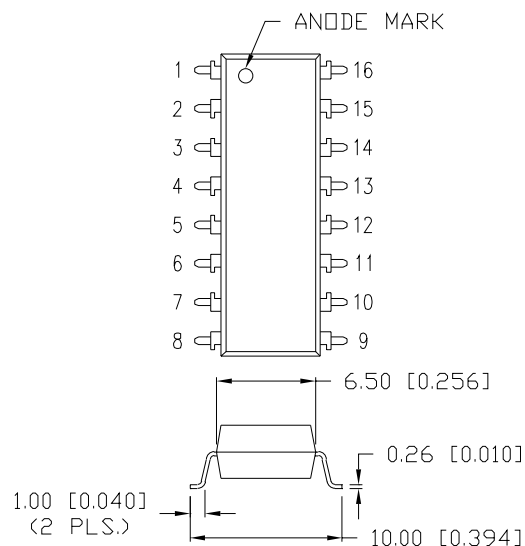

TOP VIEW

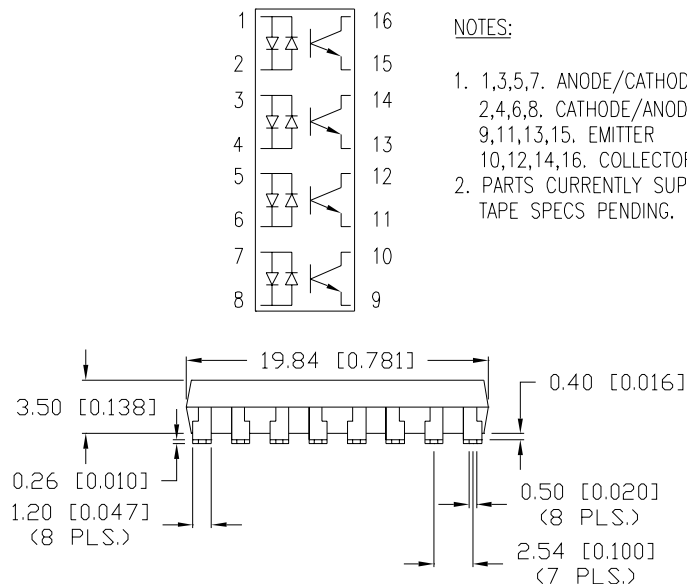

NOTES:

- 1,3,5,7. ANODE/CATHODE
2,4,6,8. CATHODE/ANODE
9,11,13,15. EMITTER
10,12,14,16. COLLECTOR
- PARTS CURRENTLY SUPPLIED IN TUBES.
TAPE SPECS PENDING.

CAUTION: STATIC SENSITIVE DEVICE
FOLLOW PROPER E.S.D. HANDLING PROCEDURES
WHEN WORKING WITH THIS PART.

PART NUMBER TABLE	
PART= /X	CTR (%)
/A	60 TO 600
/B	60 TO 300

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCE IS $\pm 0.25\text{mm}$ ($\pm 0.010''$)

REV.	PART NUMBER OCP-PCT4216/X-TR	CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES. RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.		LUMEX INCORPORATED 290 E. HELLEN ROAD PALATINE, ILLINOIS 60067 PHONE: 1-847-359-2790 WEB: HTTP://WWW.LUMEX.COM	
SIXTEEN PIN SURFACE MOUNT QUAD CHANNEL PHOTOCOUPLER, BIPOLAR INPUT, TRANSITOR OUTPUT, WITHOUT EXTERNAL BASE CONNECTION.		DRAWN BY: TM/BC	CHECKED BY:	APPROVED BY:	DATE: 8-12-99 PAGE: 1 OF 2 SCALE: N/A