

3BR

Snap-action Microswitches

Standard Plastic

3BR


- Characteristics
- Choice of IP54 or IP67 sealed versions
 - Precise movements and exceptional repeat accuracy
 - Robust plastic housing

Rating Up to 125 VAC, 10 A

Dimensions (mm) 53.1 x 20.6 x 30.8

Actuator Plunger

Approvals UL, CSA




Preferred Range

Design Reference	Actuating Force		Sealing	Operating pos.		Terminal	Circuit	Actuator	Contacts	Electrical rating
	(N)	(ozf)		(mm)	(in)					
3BR103	7.2	26.00	IP54	39.3	1.55	Screw	CO	Plunger	Silver	Up to 125 VAC, 10 A
3BR510	7.2	26.00	IP67	39.3	1.55	Screw	CO	Plunger	Silver	Up to 125 VAC, 10 A


Specifications

Housing	Phenolic
Plunger	Stainless steel
Cowl	Silicone rubber
Mechanism	Single pole change-over
Contacts	Silver
Terminals	Screw terminals with captive washers
Temperature	-10°C to +85°C
Mechanical life	10 ⁶ cycles minimum (impact free actuation)
Protection	3BR / 510 IP67 (NEMA type 6) except terminals / 3BR103 IP54 (NEMA type 4)
Mounting	Side mounting

Circuit diagram

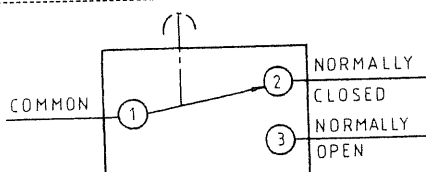

Dimensions

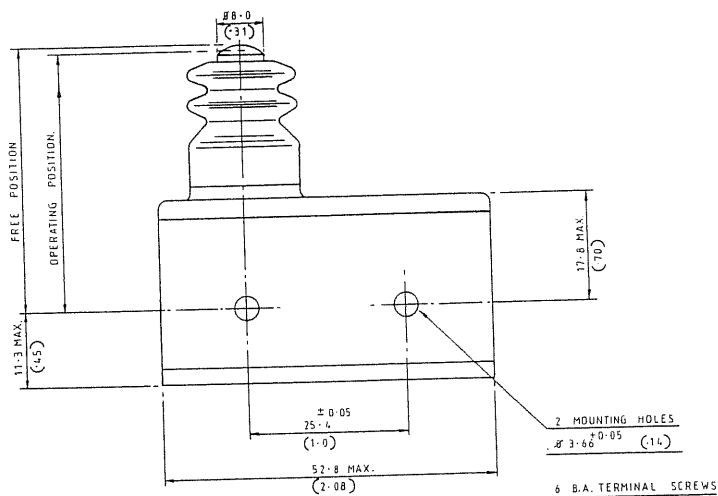


Recommended maximum electrical ratings

Voltage (max)	Load (A)	Horsepower	Approval
250 VAC	5 (0.75 pf)	-	CSA 22.2 No. 55 - 6,000 operations
125 VAC	10 (0.75 pf)	-	CSA 22.2 No. 55 - 6,000 operations
250 VAC	-	1/4 HP (0.45 pf)	CSA 22.2 No. 55 - 6,000 operations
125 VAC	-	1/4 HP (0.45 pf)	CSA 22.2 No. 55 - 6,000 operations
0 - 15 VDC	10	-	General rating - 50,000 operations
15 - 30 VDC	5	-	General rating - 50,000 operations

3BR

Operating Characteristics

Actuator	Reference	Actuating Force		Release Force		Free Position Maximum		Operating Position		Movement Differential Maximum		Overtravel	
		Maximum (N)	(ozf)	Minimum (N)	(ozf)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)
Plunger	3BR103 3BR/510	7.2	26.00	1.7	6	40,8	1,6	39,3 ± 0.4	1.55 ± 0.016	0.08	0.003	4,6	0.18



Ordering Reference

Type	3BR	
environmental sealing	103	Mechanism sealed to IP54 (NEMA type 4)
	510	Mechanism sealed to IP67 (NEMA type 6)