

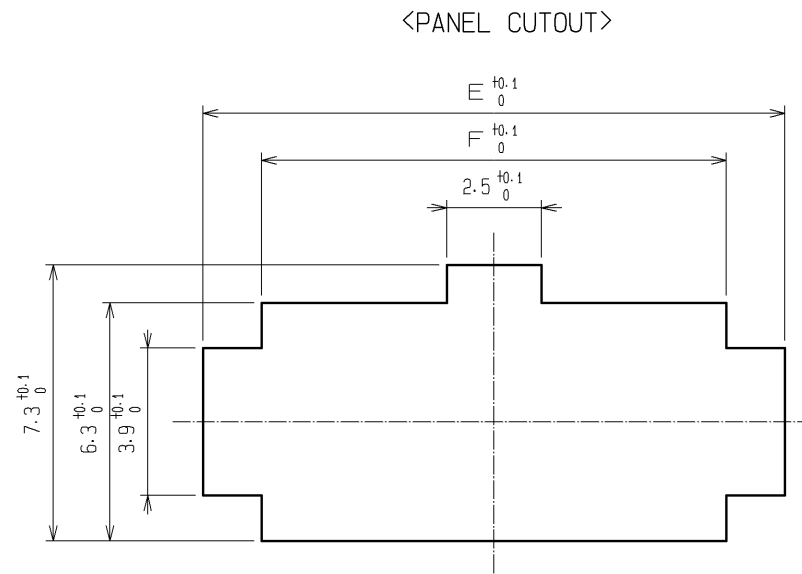
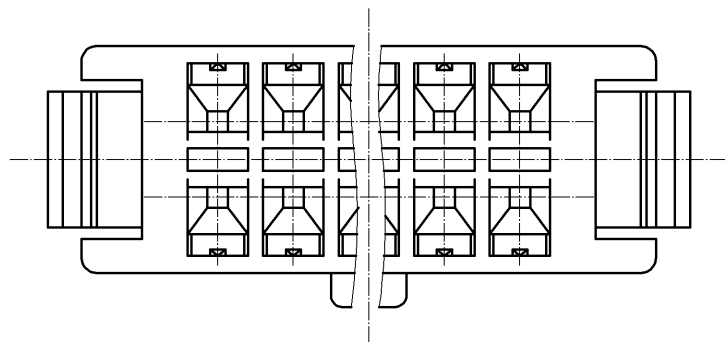
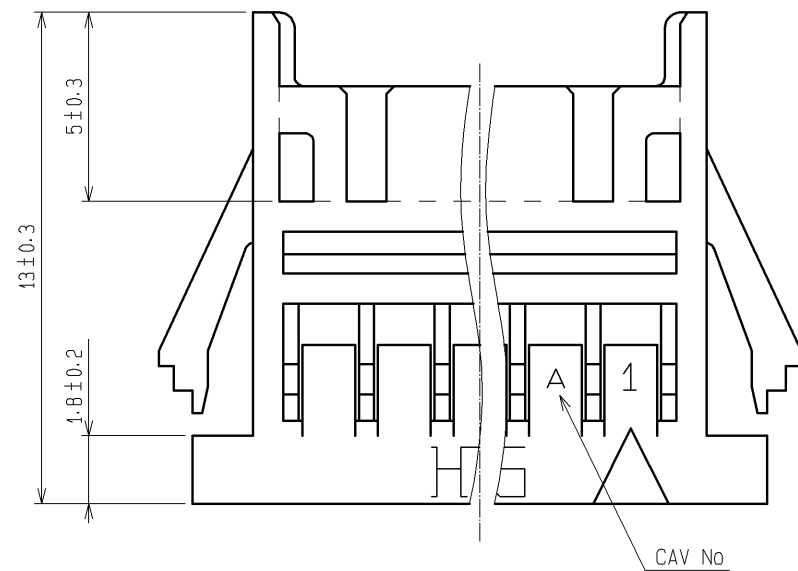
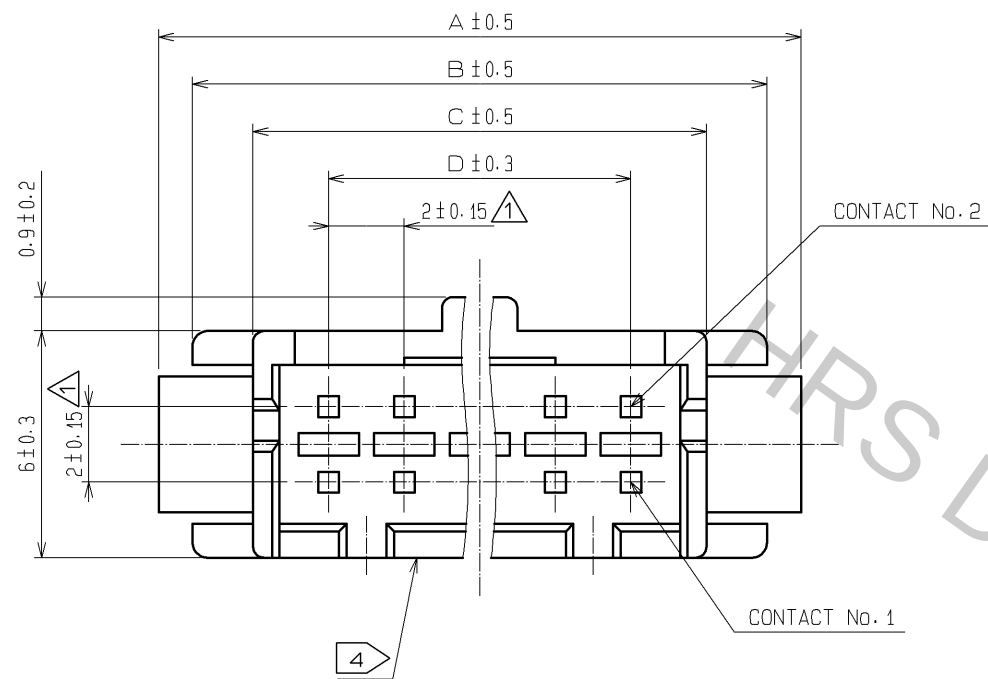




NUMBER OF CONTACT	HRS No.	A	B	C	D	E	F
4	CL543-0619-5	11.0	9.2	6.0	2.0	9.4	6.3
6	CL543-0620-4	13.0	11.2	8.0	4.0	11.4	8.3
8	CL543-0621-7	15.0	13.2	10.0	6.0	13.4	10.3
10	CL543-0622-0	17.0	15.2	12.0	8.0	15.4	12.3
12	CL543-0623-2	19.0	17.2	14.0	10.0	17.4	14.3
14	CL543-0624-5	21.0	19.2	16.0	12.0	19.4	16.3
16	CL543-0625-8	23.0	21.2	18.0	14.0	21.4	18.3
18	CL543-0626-0	25.0	23.2	20.0	16.0	23.4	20.3
20	CL543-0627-3	27.0	25.2	22.0	18.0	25.4	22.3
22	CL543-0628-6	29.0	27.2	24.0	20.0	27.4	24.3
24	CL543-0629-9	31.0	29.2	26.0	22.0	29.4	26.3
26	CL543-0630-8	33.0	31.2	28.0	24.0	31.4	28.3
28	CL543-0631-0	35.0	33.2	30.0	26.0	33.4	30.3
30	CL543-0632-3	37.0	35.2	32.0	28.0	35.4	32.3
32	CL543-0633-6	39.0	37.2	34.0	30.0	37.4	34.3

- NOTE 1> PLEASE USE THE NON-RADIUS SIDE FOR THE PANEL HOOKING AREA.
2. APPLICABLE PANEL THICKENING IS 1.6 TO 1.0mm.
(A SLIGHT DEVIATION WILL OCCUR FOR THE THICKNESS EXCEPT FOR 1.6 AND 1.2mm.)
3. LENGTH OF MATING WITH 'DF11-+DC-2C' IS 15.3mm.
4> THE WALL IN CENTER DOESN'T EXIST FOR 4 AND 6 CONTACTS.

			1		ORYAMIDE		UL94V-0(BLACK)			
NO.	MATERIAL		FINISH , REMARKS			NO.	MATERIAL		FINISH , REMARKS	
UNITS mm		SCALE 5 : 1		COUNT 3	DESCRIPTION OF REVISIONS DIS-H-004178		DESIGNED YK. NAKATSU		CHECKED TS. FUKUSHIMA	DATE 09.09.14
 HIROSE ELECTRIC CO. , LTD.			APPROVED : KJ. KATAYOSE		05.01.05	DRAWING NO.		EDC3-081880-01		
			CHECKED : TY. OMA		05.01.05	PART NO.		DF11- *DEP-2C		
			DESIGNED : IO. DENPOUYA		05.01.05	CODE NO.		CL543-		
			DRAWN : IO. DENPOUYA		05.01.05					
				1	1					