


# POSISTOR® for Circuit Protection

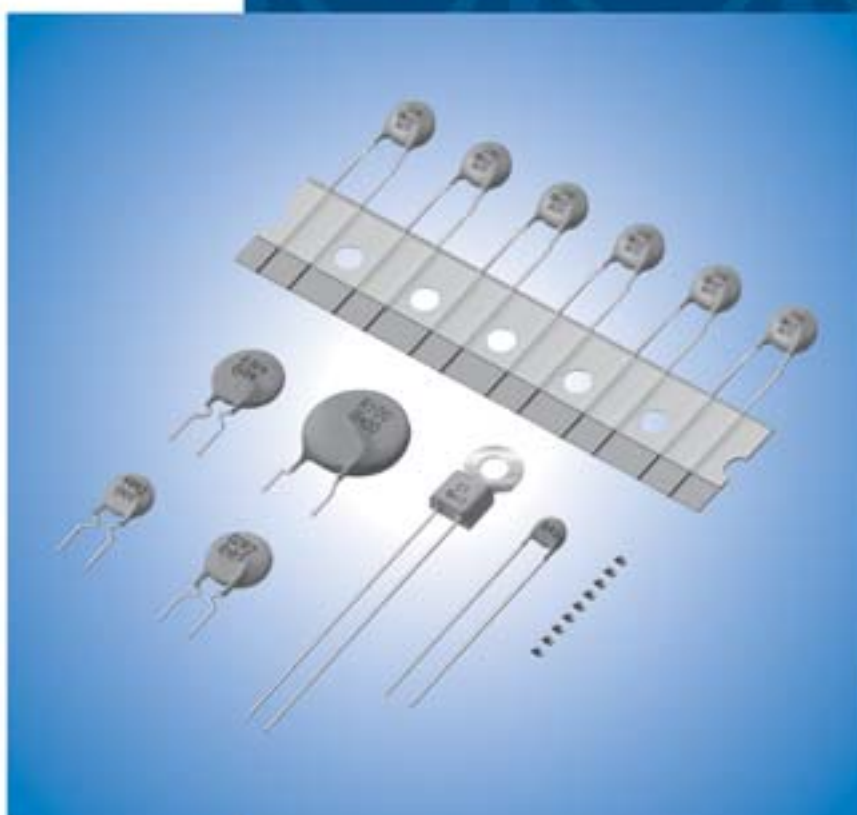

### **EU RoHS Compliant**

- All the products in this catalog comply with EU RoHS.
- EU RoHS is "the European Directive 2011/65/EU on the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment."
- For more details, please refer to our website 'Murata's Approach for EU RoHS' (<http://www.murata.com/info/rohs.html>).

# CONTENTS

POSISTOR® and "POSISTOR" in this catalog are the trademarks of Murata Manufacturing Co., Ltd.

|                                                                                   |     |
|-----------------------------------------------------------------------------------|-----|
| <b>Part Numbering</b>                                                             | 2   |
| <b>Basic Characteristics of POSISTOR®</b>                                         | 5   |
| <b>Selection Guide</b>                                                            | 7   |
| <b>Application Matrix</b>                                                         | 8   |
| <b>Application Notes</b>                                                          | 9   |
| <b>1 Overcurrent Protection Chip Type</b>                                         | 13  |
| ● Chip Type Specifications and Test Methods                                       | 22  |
| <b>2 Overcurrent Protection Narrow Current Band 30V Series</b>                    | 25  |
| <b>3 Overcurrent Protection Narrow Current Band 51/60V Series</b>                 | 28  |
| <b>4 Overcurrent Protection Narrow Current Band 140V Series</b>                   | 33  |
| <b>5 Overcurrent Protection 16V Series</b>                                        | 36  |
| <b>6 Overcurrent Protection 24/30/32V Series</b>                                  | 39  |
| <b>7 Overcurrent Protection 56/80V Series</b>                                     | 46  |
| <b>8 Overcurrent Protection 125/140V Series</b>                                   | 51  |
| <b>9 Overcurrent Protection 250/265V Series</b>                                   | 56  |
| <b>PTGL Series Narrow Current Band Specifications and Test Methods</b>            | 64  |
| <b>PTGL Series Specifications and Test Methods</b>                                | 66  |
| <b>10 Inrush Current Suppression (Less than 100μF)</b>                            | 67  |
| <b>11 Inrush Current Suppression for High Capacitance (100μF or more)</b>         | 68  |
| <b>Inrush Current Suppression Specifications and Test Methods</b>                 | 69  |
| <b>12 Overheat Sensing Chip Tight Tolerance Type</b>                              | 70  |
| <b>13 Overheat Sensing Chip Type</b>                                              | 71  |
| <b>Overheat Sensing Chip Type (Related Data)</b>                                  | 72  |
| <b>Overheat Sensing Chip Tight Tolerance Type (Reference Data)</b>                | 73  |
| <b>Overheat Sensing Chip Type (Reference Data)</b>                                | 76  |
| <b>Overheat Sensing Chip Tight Tolerance Type Specifications and Test Methods</b> | 78  |
| <b>Overheat Sensing Chip Type Specifications and Test Methods</b>                 | 81  |
| <b>14 Overheat Sensing Lead Type</b>                                              | 82  |
| ● Temperature Sensor Lead Type Specifications and Test Methods                    | 86  |
| <b>⚠Caution/Notice</b>                                                            | 87  |
| <b>Chip Type PRG/PRF Series Package</b>                                           | 99  |
| <b>Lead Type PTGL/PTF Series Package</b>                                          | 100 |

## ● Part Numbering

### PTC Thermistors (POSISTOR®) for Overcurrent Protection Chip Type

(Part Number)

|    |   |    |    |     |   |    |    |
|----|---|----|----|-----|---|----|----|
| PR | G | 18 | BB | 470 | M | B1 | RB |
| ①  | ② | ③  | ④  | ⑤   | ⑥ | ⑦  | ⑧  |

#### ① Product ID

| Product ID |                           |
|------------|---------------------------|
| PR         | PTC Thermistors Chip Type |

#### ② Series

| Code | Series                     |
|------|----------------------------|
| G    | for Overcurrent Protection |

#### ③ Dimensions (L×W)

| Code | Dimensions (L×W) | EIA  |
|------|------------------|------|
| 15   | 1.00×0.50mm      | 0402 |
| 18   | 1.60×0.80mm      | 0603 |
| 21   | 2.00×1.25mm      | 0805 |

#### ④ Temperature Characteristics

| Code | Temperature Characteristics |
|------|-----------------------------|
| BB   | Curie Point 100°C           |
| BC   | Curie Point 90°C            |

#### ⑤ Resistance

Expressed by three-digit alphanumerics. The unit is ohm ( $\Omega$ ). The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures. If there is a decimal point, it is expressed by the capital letter "R." In this case, all figures are significant digits.

| Ex. | Code | Resistance   |
|-----|------|--------------|
|     | 4R7  | 4.7 $\Omega$ |
|     | 470  | 47 $\Omega$  |
|     | 471  | 470 $\Omega$ |

#### ⑥ Resistance Tolerance

| Code | Resistance Tolerance |
|------|----------------------|
| M    | ±20%                 |

#### ⑦ Individual Specifications

| Ex. | Code | Individual Specifications |
|-----|------|---------------------------|
|     | B1   | Structure, others         |

#### ⑧ Packaging

| Code | Packaging                               |
|------|-----------------------------------------|
| RA   | Embossed Taping (4mm Pitch) (4000 pcs.) |
| RB   | Paper Taping (4mm Pitch) (4000 pcs.)    |
| RC   | Paper Taping (2mm Pitch) (10000 pcs.)   |
| RK   | Embossed Taping (4mm Pitch) (3000 pcs.) |

## PTC Thermistors (POSISTOR®) for Overheat Sensing Chip Type

(Part Number)

|    |   |    |    |     |   |    |    |
|----|---|----|----|-----|---|----|----|
| PR | F | 18 | BB | 471 | Q | B5 | RB |
| ①  | ② | ③  | ④  | ⑤   | ⑥ | ⑦  | ⑧  |

### ① Product ID

| Product ID |                           |
|------------|---------------------------|
| PR         | PTC Thermistors Chip Type |

### ② Series

| Code | Series               |
|------|----------------------|
| F    | for Overheat Sensing |

### ③ Dimensions (L×W)

| Code | Dimensions (L×W) | EIA  |
|------|------------------|------|
| 15   | 1.00×0.50mm      | 0402 |
| 18   | 1.60×0.80mm      | 0603 |
| 21   | 2.00×1.25mm      | 0805 |

### ④ Temperature Characteristics

| Code | Temperature Characteristics |
|------|-----------------------------|
| AR   | Curie Point 120°C           |
| AS   | Curie Point 130°C           |
| BA   | Curie Point 110°C           |
| BB   | Curie Point 100°C           |
| BC   | Curie Point 90°C            |
| BD   | Curie Point 80°C            |
| BE   | Curie Point 70°C            |
| BF   | Curie Point 60°C            |
| BG   | Curie Point 50°C            |

### ⑤ Resistance

Expressed by three figures. The unit is ohm ( $\Omega$ ). The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures.

| Code | Resistance   |
|------|--------------|
| 471  | 470 $\Omega$ |

### ⑥ Resistance Tolerance

| Code | Resistance Tolerance | Sensing Temp. Tolerance |
|------|----------------------|-------------------------|
| Q    | Special Tolerance    | ±5°C                    |
| R    | Special Tolerance    | ±3°C                    |

### ⑦ Individual Specifications

| Code | Individual Specifications |
|------|---------------------------|
| B5   | Structure, others         |

### ⑧ Packaging

| Code | Packaging                               |
|------|-----------------------------------------|
| RA   | Embossed Taping (4mm Pitch) (4000 pcs.) |
| RB   | Paper Taping (4mm Pitch) (4000 pcs.)    |
| RC   | Paper Taping (2mm Pitch) (10000 pcs.)   |

## PTC Thermistors (POSISTOR®)

for Overcurrent Protection / for Inrush Current Suppression / for Overheat Sensing Lead Type

(Part Number)

|    |    |    |    |     |   |      |    |
|----|----|----|----|-----|---|------|----|
| PT | GL | 07 | AR | 220 | M | 3P51 | A0 |
| ①  | ②  | ③  | ④  | ⑤   | ⑥ | ⑦    | ⑧  |

### ① Product ID

| Product ID |                 |
|------------|-----------------|
| PT         | PTC Thermistors |

### ② Series

| Code | Series                                                                               |
|------|--------------------------------------------------------------------------------------|
| FL   | for Overheat Sensing Lead Type                                                       |
| FM   | for Overheat Sensing with Lug-terminal                                               |
| GL   | for Current Control (Over Current Protection · Inrush Current Suppression) Lead Type |

### ③ Dimensions

| Code | Dimensions                        |
|------|-----------------------------------|
| 04   | Nominal Body Diameter 4mm Series  |
| 05   | Nominal Body Diameter 5mm Series  |
| 07   | Nominal Body Diameter 7mm Series  |
| 09   | Nominal Body Diameter 9mm Series  |
| 10   | Nominal Body Diameter 10mm Series |
| 12   | Nominal Body Diameter 12mm Series |
| 13   | Nominal Body Diameter 13mm Series |
| 14   | Nominal Body Diameter 14mm Series |
| 16   | Nominal Body Diameter 16mm Series |
| 18   | Nominal Body Diameter 18mm Series |
| 20   | Nominal Body Diameter 20mm Series |

### ④ Temperature Characteristics

| Code | Temperature Characteristics |
|------|-----------------------------|
| AR   | Curie Point 120°C           |
| AS   | Curie Point 130°C           |
| BA   | Curie Point 110°C           |
| BB   | Curie Point 100°C           |
| BC   | Curie Point 90°C            |
| BD   | Curie Point 80°C            |
| BE   | Curie Point 70°C            |
| BF   | Curie Point 60°C            |
| BG   | Curie Point 50°C            |
| BH   | Curie Point 40°C            |

### ⑤ Resistance

Expressed by three-digit alphanumerics. The unit is ohm ( $\Omega$ ). The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures. If there is a decimal point, it is expressed by the capital letter "R." In this case, all figures are significant digits.

| Ex. | Code | Resistance    |
|-----|------|---------------|
|     | R22  | 0.22 $\Omega$ |
|     | 2R2  | 2.2 $\Omega$  |
|     | 220  | 22 $\Omega$   |

### ⑥ Resistance Tolerance

| Code | Resistance Tolerance |
|------|----------------------|
| H    | $\pm 25\%$           |
| K    | $\pm 10\%$           |
| M    | $\pm 20\%$           |
| N    | $\pm 30\%$           |
| Q    | Special Tolerance    |

### ⑦ Individual Specifications

| Ex. | Code | Individual Specifications |
|-----|------|---------------------------|
|     | 3P51 | Lead Type, others         |

### ⑧ Packaging

| Code | Packaging |
|------|-----------|
| A*   | Ammo Pack |
| B*   | Bulk      |

## Basic Characteristics of POSISTOR®


### ■ Basic Characteristics

POSISTOR® has three main characteristics.

#### 1. Resistance - Temperature Characteristics

Although there is a negligible difference between the normal and "Curie Point" temperature, POSISTOR® shows almost constant resistance-temperature characteristics. Yet they have resistance-temperature characteristics that cause resistance to sharply increase when the temperature exceeds the Curie Point. The Curie Point (C.P.) is defined as the temperature at which the resistance value is twice the one at 25°C.


Resistance - Temperature Characteristic

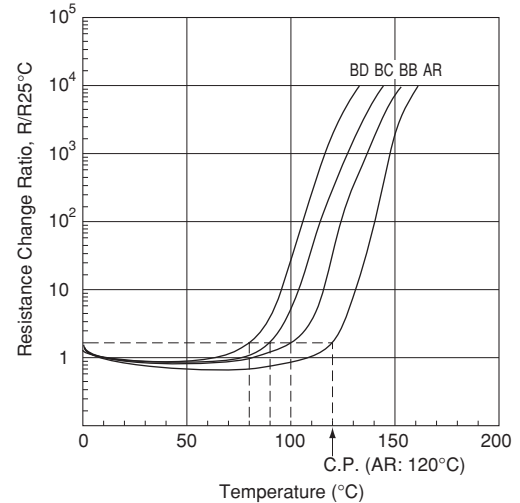

#### 2. Current - Voltage Characteristics (Static Characteristic)

This shows the relation between applied voltage when voltage applied to POSISTOR® causes balancing of inner heating and outer thermal dissipation and stabilized current. This has both a maximum point of current and constant output power.


Current - Voltage Characteristic (Static Characteristic)

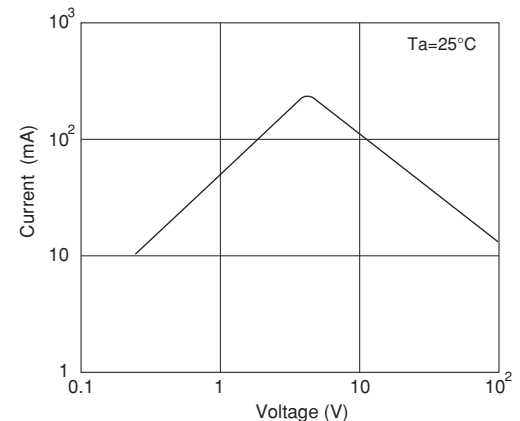

#### 3. Current - Time Characteristics (Dynamic Characteristic)

This shows the relation between current and time before inner heating and outer thermal dissipation arrive at equilibrium state. This features having large initial current and abruptly continuous attenuating portion.

Current - Time Characteristic (Dynamic Characteristic)

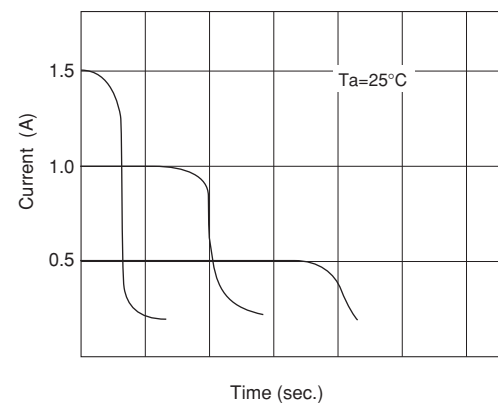

## Basic Characteristics of POSISTOR®

### Technical Terms



#### 1. Protective Threshold Current

The maximum current value is called the "Protective Threshold Current" for Voltage vs. Current characteristics (static).

When smaller than the protective threshold current flows in POSISTOR®, it reaches its stability (as shown in figure on right) at the intersection (A) of the load curve (a) and voltage-current characteristics of POSISTOR®(c). And POSISTOR® works as a normal fixed resistor.

However, when larger than protective threshold current flows, it stabilizes at the intersection (B) with the load curve (b).

Load Curve of Circuit and Voltage - Current Characteristics of POSISTOR®

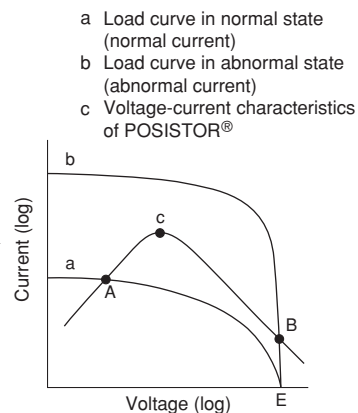


#### 2. Protective Threshold Current Range

Protective threshold current varies depending on the ambient temperature, resistance value, temperature characteristics and shape. (see Figure on right) The maximum value of trip current and the minimum value of the hold current are in the range of ambient temperature -10 to +60°C.

That is, when a current is smaller than the hold current, POSISTOR® works only as a fixed resistor. When larger than the trip current flows, however, POSISTOR® protects the circuit from overload.


Protective Threshold Current Range

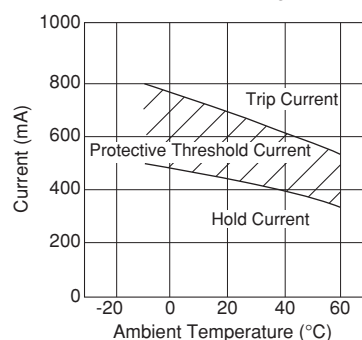

#### 3. Operating Time

A period starting from the voltage input to the moment current itself sharply attenuates is called "Operating Time." Conventionally, operation time ( $t_0$ ) is determined to be the period until inrush current ( $I_0$ ) decreases to a level one half the original inrush current ( $I_0/2$ ).


Operating Current

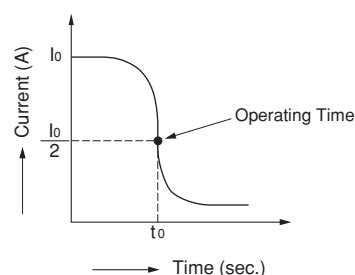

## Selection Guide

Please confirm the parameters according to the following questions.  
The best selection is the product that matches three parameters.

### ● Confirmation Items

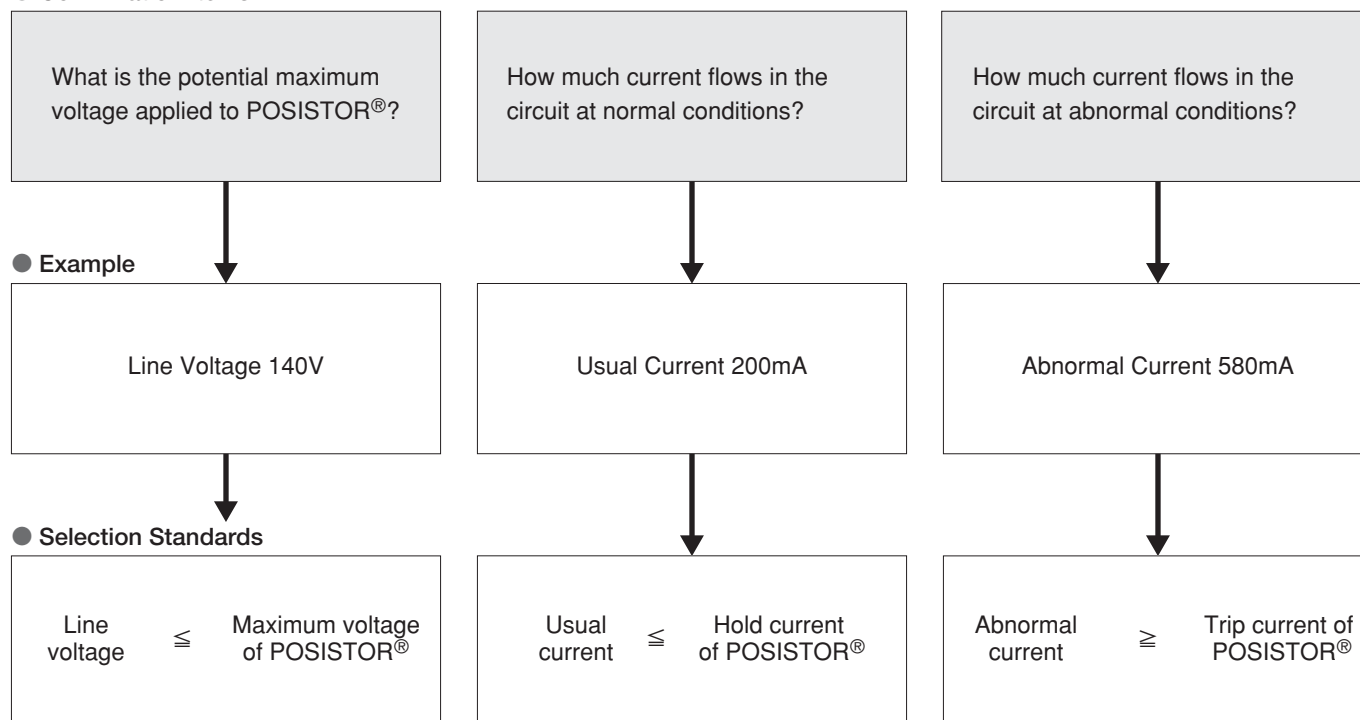

| Part Number        | Max. Voltage (V) | Hold Current at +60°C (mA) | Trip Current at -10°C (mA) | Max. Current (A) | Resistance (at 25°C) (ohm) | Body Diameter (D) (mm) | Thick. (T) (mm) |
|--------------------|------------------|----------------------------|----------------------------|------------------|----------------------------|------------------------|-----------------|
| PTGL18AR4R7M6B72B0 | 125              | 360                        | 900                        | 1.7              | 4.7 ±20%                   | 18.5                   | 5.5             |
| PTGL18AR3R3M6B72B0 | 125              | 420                        | 1050                       | 2.0              | 3.3 ±20%                   | 18.5                   | 5.5             |
| PTGL07AR330M6A51B0 | 140              | 100                        | 230                        | 0.5              | 33 ±20%                    | 7.4                    | 6.0             |
| PTGL09AR220M6C61B0 | 140              | 140                        | 330                        | 1.0              | 22 ±20%                    | 9.6                    | 6.0             |
| PTGL10AR150M6C61B0 | 140              | 170                        | 400                        | 1.0              | 15 ±20%                    | 11.6                   | 6.0             |
| PTGL12AR100M6C01B0 | 140              | 220                        | 510                        | 1.0              | 10 ±20%                    | 13.0                   | 6.0             |
| PTGL13AR6R8M6C01B0 | 140              | 290                        | 670                        | 1.0              | 6.8 ±20%                   | 14.0                   | 6.0             |
| PTGL16AR5R6M6C01B0 | 140              | 340                        | 780                        | 2.0              | 5.6 ±20%                   | 17.0                   | 6.0             |

PTGL12AR100M6C01B0 is the best selection in this case.

## Application Matrix

| Application                             |                                                | Series | Overcurrent Protection |                   | Overheat Sensing |                         |
|-----------------------------------------|------------------------------------------------|--------|------------------------|-------------------|------------------|-------------------------|
|                                         |                                                |        | Chip type<br>PRG       | Lead type<br>PTGL | Chip type<br>PRF | Lead type<br>PTFL, PTFM |
| AV equipment                            | Plasma TV                                      |        | ●                      | ●                 | ●                | ●                       |
|                                         | LCD TV                                         |        | ●                      | ●                 | ●                | ●                       |
|                                         | Projection TV                                  |        | ●                      | ●                 | ●                | ●                       |
|                                         | CATV                                           |        | ●                      | ●                 | ●                |                         |
|                                         | STB                                            |        | ●                      | ●                 | ●                |                         |
|                                         | Video camera                                   |        | ●                      |                   | ●                |                         |
|                                         | Digital camera                                 |        | ●                      |                   | ●                |                         |
|                                         | DVD recorder                                   |        | ●                      |                   | ●                |                         |
|                                         | Audio                                          |        | ●                      | ●                 | ●                | ●                       |
|                                         | Electric keyboard, Electronic music instrument |        | ●                      | ●                 | ●                | ●                       |
|                                         | Digital mobile audio                           |        | ●                      |                   | ●                |                         |
|                                         | MD/CD player                                   |        | ●                      |                   | ●                |                         |
|                                         | TV game                                        |        | ●                      | ●                 | ●                |                         |
|                                         | Portable game                                  |        | ●                      |                   | ●                |                         |
| Information equipment                   | Laptop                                         |        | ●                      |                   | ●                |                         |
|                                         | Desktop computer                               |        | ●                      |                   | ●                |                         |
|                                         | Server                                         |        | ●                      | ●                 | ●                | ●                       |
|                                         | Printer                                        |        | ●                      | ●                 | ●                | ●                       |
|                                         | Scanner                                        |        | ●                      |                   | ●                |                         |
|                                         | LCD display                                    |        | ●                      | ●                 | ●                | ●                       |
|                                         | USB access device                              |        | ●                      |                   |                  |                         |
|                                         | HDD                                            |        |                        |                   | ●                |                         |
|                                         | CD/DVD-ROM/RAM                                 |        |                        |                   | ●                |                         |
|                                         | Copy machine                                   |        | ●                      | ●                 | ●                | ●                       |
|                                         | Electronic dictionary/databook                 |        | ●                      |                   | ●                |                         |
|                                         | Electronic blackboard                          |        | ●                      | ●                 | ●                | ●                       |
|                                         | Electronic automatic exchange                  |        | ●                      | ●                 |                  |                         |
| Communications equipment                | Transmission equipment                         |        | ●                      | ●                 |                  |                         |
|                                         | PBX                                            |        | ●                      | ●                 |                  |                         |
|                                         | Cordless telephone                             |        |                        | ●                 |                  |                         |
|                                         | Fax machine                                    |        | ●                      | ●                 |                  | ●                       |
|                                         | Modem                                          |        | ●                      | ●                 | ●                |                         |
|                                         | Cellular phone                                 |        | ●                      |                   | ●                |                         |
|                                         | Headset                                        |        |                        |                   | ●                |                         |
|                                         | Cellular phone base station                    |        | ●                      | ●                 | ●                | ●                       |
|                                         | Intercom                                       |        | ●                      | ●                 |                  |                         |
|                                         | Engine control ECU                             |        | ●                      |                   | ●                |                         |
|                                         | Drive control ECU                              |        | ●                      |                   | ●                |                         |
|                                         | Air bag                                        |        | ●                      |                   | ●                |                         |
| Car electronics                         | Anticollision radar                            |        |                        |                   | ●                |                         |
|                                         | ABS/ESC                                        |        | ●                      |                   | ●                |                         |
|                                         | Instrument/display panel, Meter                |        | ●                      |                   | ●                |                         |
|                                         | Rechargeable battery for EV/HEV                |        | ●                      | ●                 | ●                |                         |
|                                         | Car air conditioner                            |        |                        |                   | ●                |                         |
|                                         | HID/LED headlight, AFS                         |        | ●                      | ●                 | ●                |                         |
|                                         | LED tail light                                 |        | ●                      | ●                 | ●                |                         |
|                                         | LED interior light                             |        | ●                      |                   | ●                |                         |
|                                         | Retractable electric mirror                    |        | ●                      | ●                 |                  |                         |
|                                         | Door lock, trunk opener                        |        |                        | ●                 |                  |                         |
|                                         | Power seat                                     |        |                        | ●                 |                  |                         |
|                                         | Shock absorber                                 |        |                        | ●                 |                  |                         |
|                                         | VICS, ETC                                      |        |                        |                   | ●                |                         |
|                                         | Burglar alarm                                  |        | ●                      | ●                 |                  |                         |
|                                         | Car navigation                                 |        | ●                      | ●                 | ●                |                         |
|                                         | Car audio                                      |        | ●                      | ●                 | ●                | ●                       |
|                                         | Refrigerator                                   |        | ●                      | ●                 | ●                |                         |
|                                         | Microwave, Oven                                |        | ●                      | ●                 | ●                |                         |
|                                         | Electric rice-cooker                           |        |                        | ●                 | ●                |                         |
|                                         | IH cooking device                              |        |                        | ●                 | ●                |                         |
| Home electronics<br>Household equipment | Air conditioner                                |        | ●                      | ●                 | ●                |                         |
|                                         | Fan heater                                     |        |                        |                   | ●                | ●                       |
|                                         | Cleaner                                        |        |                        | ●                 | ●                |                         |
|                                         | Clothes washer, cloth dryer                    |        |                        | ●                 |                  |                         |
|                                         | Ventilator                                     |        |                        | ●                 | ●                |                         |
|                                         | Hot-water pot                                  |        |                        | ●                 | ●                | ●                       |
|                                         | Illumination device                            |        | ●                      | ●                 | ●                | ●                       |
|                                         | Massage chair, healthcare equipment            |        | ●                      | ●                 | ●                | ●                       |
|                                         | Hot water spray toilet seat                    |        |                        |                   | ●                | ●                       |
|                                         | Electric power tool                            |        | ●                      | ●                 | ●                | ●                       |
|                                         | Switching supply                               |        | ●                      | ●                 | ●                | ●                       |
|                                         | Inverter power                                 |        | ●                      | ●                 | ●                | ●                       |
|                                         | AC adapter, battery charger                    |        | ●                      | ●                 | ●                |                         |
|                                         |                                                |        |                        |                   |                  |                         |

## Application Notes

### ■ Inrush Current Limit for Power Supply


#### POSISTOR® Lead type: PTGL series

##### 1. Applications

POSISTOR® is an integrated solution to work as both current limit resistor and overcurrent fuse. It works as a stable resistor in normal operation and protects itself against overcurrent situations.

- (1) High wattage power supply (flat display panels etc.)
- (2) Power supply for fluorescent lights
- (3) Other switching power supplies

Replacement idea for a resistor and fuse solution

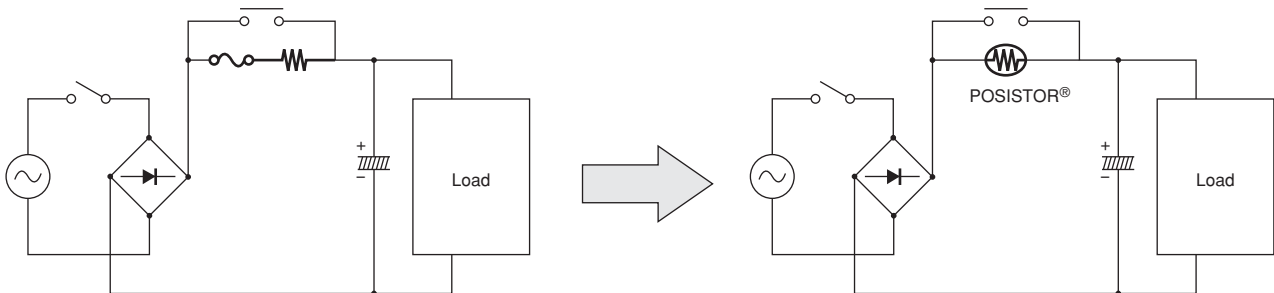

##### 2. Benefits

- (1) Protection against overcurrent situations
- (2) Automatic reset from protective trip mode
- (3) Space-saving
- (4) Various characteristics to meet a suitable resistance value

##### 3. Recommended part numbers

Choose an appropriate part number based on the resistance value required to the inrush current limit.  
Review the maximum voltage.

| Application                                         | Part Number        | Max. Voltage (V) | Resistance (at 25 °C) (ohm) | Body Diameter (mm) | Thickness (mm) | Lead Space (mm) | Lead Diameter (mm) | More Details |
|-----------------------------------------------------|--------------------|------------------|-----------------------------|--------------------|----------------|-----------------|--------------------|--------------|
| For high wattage power supply                       | PTGL13AR100H8B72B0 | 265              | 10 ±25%                     | 14.0               | 6.0            | 7.5             | 0.60               | page 57      |
|                                                     | PTGL12AR150H8B72B0 |                  | 15 ±25%                     | 12.5               | 6.0            | 7.5             | 0.60               | page 57      |
|                                                     | PTGL14AR180M9C01B0 |                  | 18 ±20%                     | 15.7               | 6.5            | 10.0            | 0.65               | page 57      |
|                                                     | PTGL09AR250H8B52B0 |                  | 25 ±25%                     | 10.0               | 6.0            | 5.0             | 0.60               | page 57      |
|                                                     | PTGL09AR390M9C61B0 |                  | 39 ±20%                     | 10.0               | 6.5            | 6.5             | 0.65               | page 56      |
| For power supply of electronic fluorescent ballasts | PTGL07AR560M9B51A0 | 280              | 56 ±20%                     | 8.2                | 6.5            | 5.0             | 0.60               | -            |
|                                                     | PTGL07AR820M9B51A0 |                  | 82 ±20%                     | 8.2                | 6.5            | 5.0             | 0.60               | -            |
|                                                     | PTGL07AS121M0N51A0 |                  | 120 ±20%                    | 7.8                | 6.0            | 5.0             | 0.50               | page 67      |
|                                                     | PTGL07AS181M0N51A0 |                  | 180 ±20%                    | 7.8                | 6.0            | 5.0             | 0.50               | page 67      |

Please ask for details.

## Application Notes

### ■ Overcurrent Protection for Communication Facility


POSISTOR® Lead type: PTGL series

#### 1. Applications

POSISTOR® is an efficient device to protect a telephone line interface (SLIC: Subscriber-Loop-Interface-Circuit) against AC line contact.

- (1) Landline telephones or FAX machines
- (2) Telephone interface of STB, VoIP equipment
- (3) Any other equipment of communication facility having a phone line interface

Replacement idea for a current fuse.

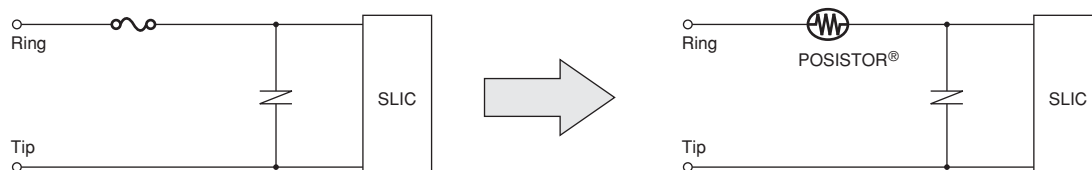

#### 2. Benefits

- (1) Automatic reset from protective trip up to 265V AC line contact
- (2) Compatible with the 600V over voltage test by UL60950
- (3) High resistance to the lighting surge (\*A surge absorber is still required to protect SLIC)

#### 3. Recommended part numbers

Choose an appropriate part number based on the hold current and on the resistance value required to the operation current of SLIC.

| Part Number               | Max. Voltage (V) | Max. Current (A) | Hold Current (at +60 °C) (mA) | Trip Current (at -10 °C) (mA) | Resistance (at +25 °C) (ohm) | Body Diameter (mm) | Thickness (mm) | Lead Space (mm) | Lead Diameter (mm) | More Details |
|---------------------------|------------------|------------------|-------------------------------|-------------------------------|------------------------------|--------------------|----------------|-----------------|--------------------|--------------|
| <b>PTGL07BB220N0B52A0</b> | 250              | 0.5              | 90                            | 300                           | 22 ±30%                      | 8.0                | 6.0            | 5.0             | 0.6                | page 56      |
| <b>PTGL09AR390N0B52A0</b> | 250              | 0.6              | 100                           | 280                           | 39 ±30%                      | 10.0               | 6.0            | 5.0             | 0.6                | page 56      |
| <b>PTGL09AR250H8B52B0</b> | 265              | 1.0              | 118                           | 330                           | 25 ±25%                      | 10.0               | 6.0            | 5.0             | 0.6                | page 57      |

Please ask for details.

## Application Notes

### ■ Current Limiter for LED



#### Chip POSISTOR®: PRG series

##### 1. Applications

POSISTOR® is an effective current limit solution based on LED's allowable current and temperature characteristics.

- (1) LED lighting instruments
- (2) LED backlight of flat displays

See below figures.

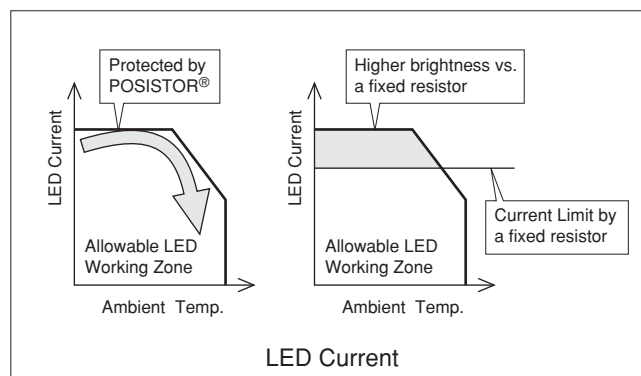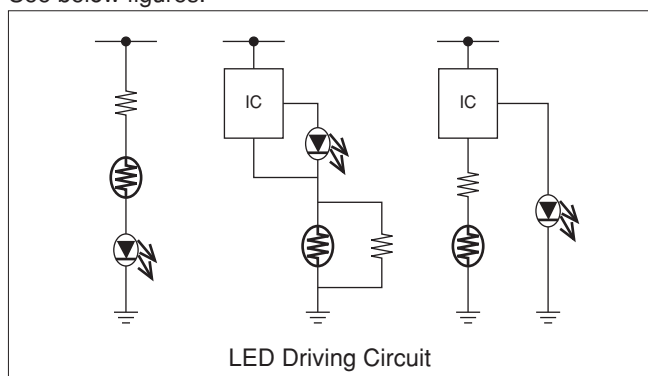

##### 2. Benefits

- (1) Higher LED brightness versus a fixed resistor. LED can work in the smaller series resistance with POSISTOR® at normal operation temperature. The number of LEDs is possibly reduced.
- (2) LED lifetime may be extended due to the current limiting function of the POSISTOR® in cases of overheat or overcurrent situation.
- (3) Small 0805 package allows the POSISTOR® to be placed close to the LED. It offers accurate detection of ambient temperature near LED and increases flexibility of packaging.

##### 3. Recommended part numbers

Choose an appropriate part number having max. voltage and resistance value. Review the protective threshold current range based on the operating current and temperature of the LED.

| Part Number     | Max. Voltage (V) | Max. Current (A) | Hold Current (at +60 °C) (mA) | Trip Current (at -10 °C) (mA) | Resistance (at +25 °C) (ohm) | Curie Point (°C) * | More Details |
|-----------------|------------------|------------------|-------------------------------|-------------------------------|------------------------------|--------------------|--------------|
| PRG21BC0R6MM1RA | 6                | 10               | 285                           | 1100                          | 0.6 ±20%                     | 90                 | page 14      |
| PRG21BC0R2MM1RA | 6                | 10               | 500                           | 2000                          | 0.2 ±20%                     | 90                 | page 14      |
| PRG21BC1R0MM1RA | 12               | 10               | 220                           | 850                           | 1.0 ±20%                     | 90                 | page 14      |
| PRG21BC2R2MM1RA | 16               | 6.5              | 150                           | 600                           | 2.2 ±20%                     | 90                 | page 14      |
| PRG21BC3R3MM1RA | 20               | 6.0              | 120                           | 480                           | 3.3 ±20%                     | 90                 | page 14      |
| PRG21BC6R8MM1RA | 30               | 3.5              | 80                            | 320                           | 6.8 ±20%                     | 90                 | page 14      |
| PRG21BC4R7MM1RA | 30               | 5.0              | 100                           | 400                           | 4.7 ±20%                     | 90                 | page 14      |

\*Curie Point means the temperature at which the resistance value reaches twice the resistance at 25°C.  
Please ask for details.

## Application Notes


### ■ Overheat/Overcurrent Protection for High Brightness LED

Leaded POSISTOR®: PTGL series & Chip POSISTOR®: PRG series

#### 1. Applications

POSISTOR® is an effective solution to protect the LED against overheat and overcurrent situation.

(1) LED lighting instruments (Appliances, Automotive etc.)

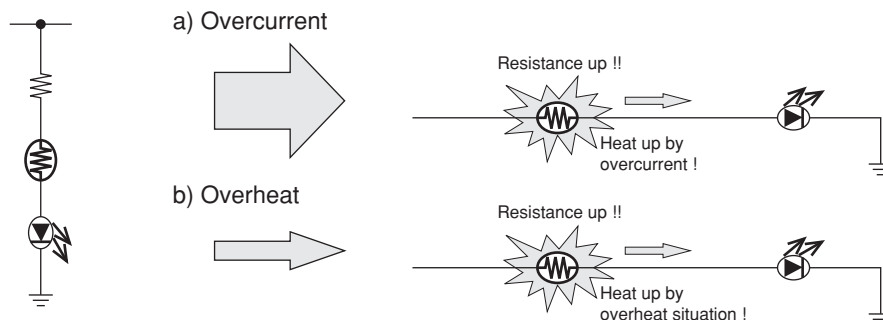

#### 2. Benefits

- (1) Posistor installed in series with LED provides both overheat and overcurrent protection
- (2) No additional driver IC or software required

- (3) Automatic reset from protective trip mode
- (4) 0603 and 0805 SMD type available (smaller than 1/2W or 1W chip resistor)

#### 3. Recommended part numbers

Choose an appropriate part number having max. voltage and resistance value. Review the protective threshold

current range based on the operating current and temperature of the LED.

| Type        | Part Number        | Max. Voltage (V) | Max. Current (A) | Hold Current (at +60 °C) (mA) | Trip Current (at -10 °C) (mA) | Resistance (at +25 °C) (ohm) | Curie Point (°C) * | More Details |
|-------------|--------------------|------------------|------------------|-------------------------------|-------------------------------|------------------------------|--------------------|--------------|
| SMD type    | PRG21BC0R6MM1RA    | 6                | 10               | 285                           | 1100                          | 0.6 ±20%                     | 90                 | page 14      |
|             | PRG21BC0R2MM1RA    | 6                | 10               | 500                           | 2000                          | 0.2 ±20%                     | 90                 | page 14      |
|             | PRG21BC1R0MM1RA    | 12               | 10               | 220                           | 850                           | 1.0 ±20%                     | 90                 | page 14      |
|             | PRG21BC2R2MM1RA    | 16               | 6.5              | 150                           | 600                           | 2.2 ±20%                     | 90                 | page 14      |
|             | PRG21BC3R3MM1RA    | 20               | 6.0              | 120                           | 480                           | 3.3 ±20%                     | 90                 | page 14      |
|             | PRG21BC6R8MM1RA    | 30               | 3.5              | 80                            | 320                           | 6.8 ±20%                     | 90                 | page 14      |
|             | PRG21BC4R7MM1RA    | 30               | 5.0              | 100                           | 400                           | 4.7 ±20%                     | 90                 | page 14      |
| Leaded type | PTGL04AS100K2N51B0 | 30               | 1.5              | 122                           | 240                           | 10 ±10%                      | 130                | page 25      |
|             | PTGL04AS100K2B51B0 | 30               | 2.0              | 167                           | 330                           | 10 ±10%                      | 130                | page 25      |
|             | PTGL05AS3R9K2B51B0 | 30               | 3.5              | 269                           | 530                           | 3.9 ±10%                     | 130                | page 25      |
|             | PTGL07AS2R7K2B51B0 | 30               | 4.5              | 336                           | 663                           | 2.7 ±10%                     | 130                | page 25      |
|             | PTGL07AS1R8K2B51B0 | 30               | 5.0              | 420                           | 829                           | 1.8 ±10%                     | 130                | page 25      |
|             | PTGL09AS1R2K2B51B0 | 30               | 6.0              | 556                           | 1097                          | 1.2 ±10%                     | 130                | page 25      |
|             | PTGL12AS0R8K2B51B0 | 30               | 7.0              | 685                           | 1352                          | 0.8 ±10%                     | 130                | page 25      |
|             | PTGL04AS100K3B51B0 | 51               | 1.0              | 168                           | 332                           | 10 ±10%                      | 130                | page 28      |
|             | PTGL05AS6R8K3B51B0 | 51               | 1.5              | 197                           | 388                           | 6.8 ±10%                     | 130                | page 28      |
|             | PTGL07AS3R3K3B51B0 | 51               | 3.0              | 307                           | 606                           | 3.3 ±10%                     | 130                | page 28      |
|             | PTGL09AS2R2K3B51B0 | 51               | 4.0              | 412                           | 814                           | 2.2 ±10%                     | 130                | page 28      |
|             | PTGL12AS1R2K3B51B0 | 51               | 5.0              | 592                           | 1168                          | 1.2 ±10%                     | 130                | page 28      |
|             | PTGL07AR220M3P51B0 | 56               | 1.0              | 90                            | 240                           | 22 ±20%                      | 120                | page 46      |
|             | PTGL07AR8R2M3P51B0 | 56               | 1.0              | 130                           | 350                           | 8.2 ±20%                     | 120                | page 46      |
|             | PTGL09AR150M3B51B0 | 56               | 1.2              | 150                           | 400                           | 15 ±20%                      | 120                | page 46      |
|             | PTGL10AR3R9M3P51B0 | 56               | 2.0              | 210                           | 550                           | 3.9 ±20%                     | 120                | page 46      |
|             | PTGL09AR4R7M3B51B0 | 56               | 2.0              | 270                           | 700                           | 4.7 ±20%                     | 120                | page 46      |
|             | PTGL10AR3R9M3B51B0 | 56               | 2.0              | 300                           | 800                           | 3.9 ±20%                     | 120                | page 46      |
|             | PTGL14AR3R3M3B71B0 | 56               | 2.5              | 380                           | 980                           | 3.3 ±20%                     | 120                | page 46      |

\* Curie Point means the temperature at which the resistance value reaches twice the resistance at 25°C.

Please ask for details.

# POSISTOR® for Circuit Protection

**muRata**


1

## Overcurrent Protection Chip Type

Overcurrent Protection device with resettable function  
suitable for current limiting resistor.

This product is a chip type PTC thermistor for  
overcurrent protection that is suitable for the  
following.

- Countermeasure for short circuit testing
- Current limiting resistor



| Part Number | Dimensions (mm) |          |          |              |          |
|-------------|-----------------|----------|----------|--------------|----------|
|             | L               | W        | T        | e            | g        |
| PRG15_RC    | 1.0±0.05        | 0.5±0.05 | 0.5±0.05 | 0.15 to 0.35 | -        |
| PRG18_RB    | 1.6±0.15        | 0.8±0.15 | 0.8±0.15 | 0.1 to 0.6   | -        |
| PRG21_RA    | 2.0±0.2         | 1.25±0.2 | 0.9±0.2  | 0.2 min.     | 0.5 min. |
| PRG21_RK    | 2.0±0.2         | 1.25±0.2 | 1.25±0.2 | 0.2 min.     | 0.5 min. |

### ■ Features

1. Rapid operation to protect the circuit in an overcurrent condition abnormality such as a short circuit.  
By removing the overcurrent condition, these products automatically return to the initial condition and can be used repeatedly.
2. Suitable for countermeasure to short circuit test in safety standard.
3. Stable resistance after operation due to ceramic PTC.
4. Similar size (0603 size) is possible due to the large capacity for electric power.
5. Possible to use these products as current limiting resistors with overcurrent protection functions
6. The SMD type's small size and light weight are helpful in miniaturizing the circuit.

### Chip Type 0402(1005) Size

| Part Number     | Max. Voltage (V) | Hold Current (at +60°C) (mA) | Hold Current (at +25°C) (mA) | Trip Current (at +25°C) (mA) | Trip Current (at -10°C) (mA) | Max. Current (mA) | Resistance (at +25°C) (ohm) |
|-----------------|------------------|------------------------------|------------------------------|------------------------------|------------------------------|-------------------|-----------------------------|
| PRG15BC330MM1RC | 30               | 25                           | 38                           | 73                           | 92                           | 1200              | 33 ±20%                     |
| PRG15BC220MM1RC | 16               | 28                           | 43                           | 90                           | 113                          | 1000              | 22 ±20%                     |
| PRG15BC180MM1RC | 16               | 31                           | 47                           | 98                           | 125                          | 1200              | 18 ±20%                     |
| PRG15BC4R7MM1RC | 9                | 60                           | 91                           | 172                          | 216                          | 2500              | 4.7 ±20%                    |
| PRG15BC3R3MM1RC | 9                | 71                           | 110                          | 205                          | 260                          | 3500              | 3.3 ±20%                    |
| PRG15BC2R2MM1RC | 6                | 88                           | 134                          | 252                          | 318                          | 3500              | 2.2 ±20%                    |

Maximum Current shows typical capacities of the transformer which can be used.  
This series is applied to reflow soldering.

### Chip Type 0603(1608) Size

| Part Number     | Max. Voltage (V) | Hold Current (at +60°C) (mA) | Hold Current (at +25°C) (mA) | Trip Current (at +25°C) (mA) | Trip Current (at -10°C) (mA) | Max. Current (mA) | Resistance (at +25°C) (ohm) |
|-----------------|------------------|------------------------------|------------------------------|------------------------------|------------------------------|-------------------|-----------------------------|
| PRG18BB471MB1RB | 24               | 7                            | 10                           | 21                           | 25                           | 60                | 470 ±20%                    |
| PRG18BB221MB1RB | 24               | 10                           | 14                           | 29                           | 35                           | 130               | 220 ±20%                    |
| PRG18BB101MB1RB | 24               | 15                           | 21                           | 45                           | 55                           | 300               | 100 ±20%                    |
| PRG18BB470MB1RB | 24               | 20                           | 29                           | 61                           | 75                           | 630               | 47 ±20%                     |
| PRG18BB330MB1RB | 24               | 25                           | 36                           | 71                           | 85                           | 900               | 33 ±20%                     |
| PRG18BC6R8MM1RB | 20               | 80                           | 120                          | 260                          | 320                          | 3500              | 6.8 ±20%                    |
| PRG18BC4R7MM1RB | 20               | 100                          | 155                          | 330                          | 400                          | 5000              | 4.7 ±20%                    |

Continued on the following page.

**muRata**

Continued from the preceding page.

| Part Number     | Max. Voltage (V) | Hold Current (at +60°C) (mA) | Hold Current (at +25°C) (mA) | Trip Current (at +25°C) (mA) | Trip Current (at -10°C) (mA) | Max. Current (mA) | Resistance (at +25°C) (ohm) |
|-----------------|------------------|------------------------------|------------------------------|------------------------------|------------------------------|-------------------|-----------------------------|
| PRG18BC3R3MM1RB | 16               | 120                          | 180                          | 400                          | 480                          | 6000              | 3.3 ±20%                    |
| PRG18BC2R2MM1RB | 12               | 150                          | 220                          | 500                          | 600                          | 6500              | 2.2 ±20%                    |
| PRG18BC1R0MM1RB | 6                | 220                          | 330                          | 740                          | 850                          | 7500              | 1.0 ±20%                    |

Maximum Current shows typical capacities of the transformer which can be used.

This series is applied to reflow soldering.

This series is recognized by UL.

## Chip Type 0805(2012) Size


| Part Number     | Max. Voltage (V) | Hold Current (at +60°C) (mA) | Hold Current (at +25°C) (mA) | Trip Current (at +25°C) (mA) | Trip Current (at -10°C) (mA) | Max. Current (mA) | Resistance (at +25°C) (ohm) |
|-----------------|------------------|------------------------------|------------------------------|------------------------------|------------------------------|-------------------|-----------------------------|
| PRG21BB220MB1RK | 20               | 30                           | 44                           | 91                           | 110                          | 1100              | 22 ±20%                     |
| PRG21BB150MB1RK | 20               | 40                           | 59                           | 116                          | 140                          | 1600              | 15 ±20%                     |
| PRG21BC6R8MM1RA | 30               | 80                           | 120                          | 260                          | 320                          | 5500              | 6.8 ±20%                    |
| PRG21BC4R7MM1RA | 30               | 100                          | 155                          | 330                          | 400                          | 8000              | 4.7 ±20%                    |
| PRG21BC3R3MM1RA | 20               | 120                          | 180                          | 400                          | 480                          | 6000              | 3.3 ±20%                    |
| PRG21BC2R2MM1RA | 16               | 150                          | 220                          | 500                          | 600                          | 6500              | 2.2 ±20%                    |
| PRG21BC1R0MM1RA | 12               | 220                          | 330                          | 740                          | 850                          | 10000             | 1.0 ±20%                    |
| PRG21BC0R6MM1RA | 6                | 285                          | 420                          | 920                          | 1100                         | 10000             | 0.6 ±20%                    |
| PRG21BC0R2MM1RA | 6                | 500                          | 750                          | 1620                         | 2000                         | 10000             | 0.2 ±20%                    |

Maximum Current shows typical capacities of the transformer which can be used.

This series is applied to reflow soldering.

This series is recognized by UL.


## Standard Land Pattern Dimensions

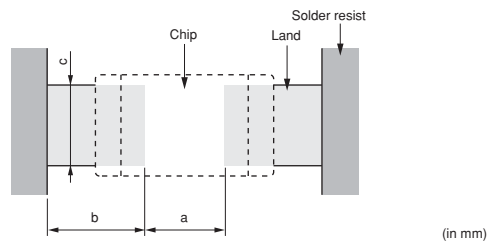


| Part Number | Soldering Methods | Dimensions (mm) |         |         |         |
|-------------|-------------------|-----------------|---------|---------|---------|
|             |                   | Chip (L×W)      | a       | b       | c       |
| PRG15       | Reflow Soldering  | 1.0×0.5         | 0.5     | 0.4-0.5 | 0.5     |
| PRG18       | Reflow Soldering  | 1.6×0.8         | 0.6-0.8 | 0.6-0.7 | 0.6-0.8 |
| PRG21       | Reflow Soldering  | 2.0×1.25        | 1.0-1.2 | 0.5-0.7 | 1.0-1.2 |

## Protective Threshold Current Range

PRG15BC330MM1RC

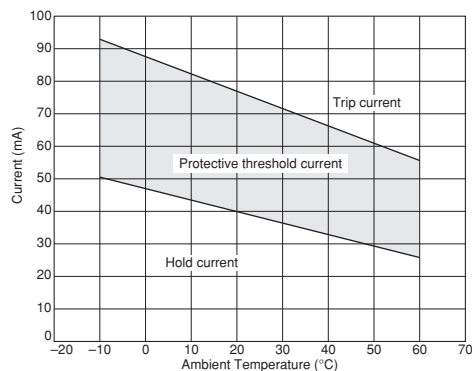

PRG15BC220MM1RC

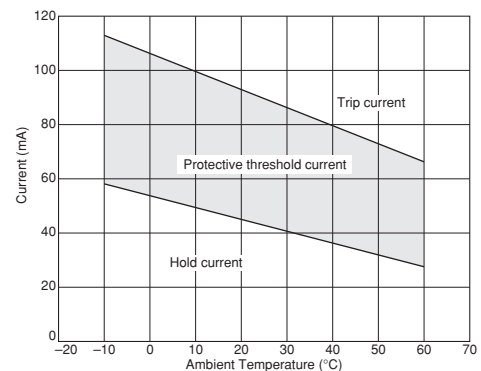


Continued on the following page. ➤


Continued from the preceding page.

## ■ Protective Threshold Current Range


PRG15BC180MM1RC

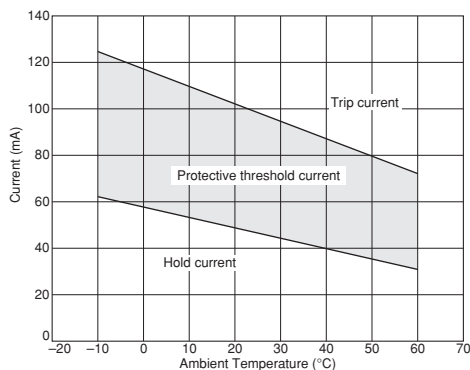


PRG15BC4R7MM1RC

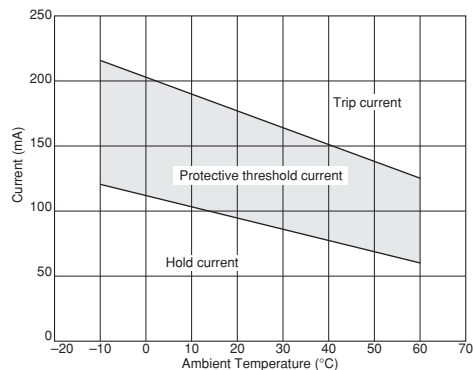


PRG15BC3R3MM1RC

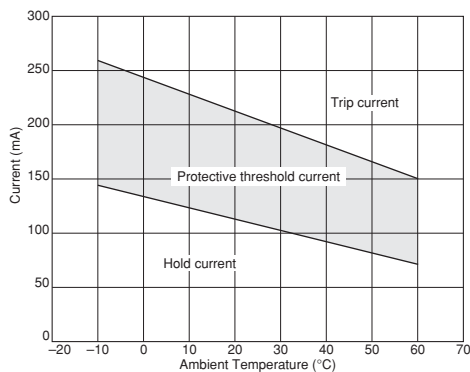


PRG15BC2R2MM1RC

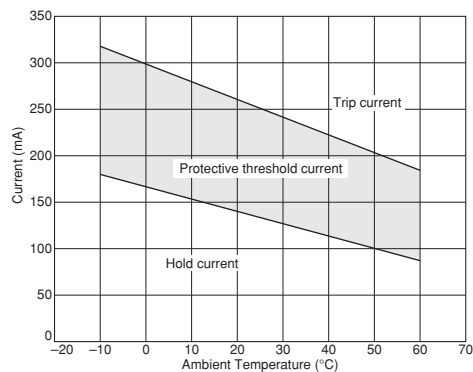


PRG18BB471MB1RB

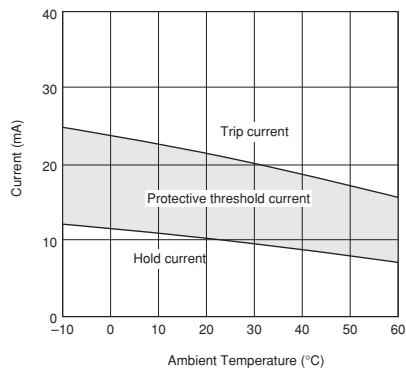


PRG18BB221MB1RB

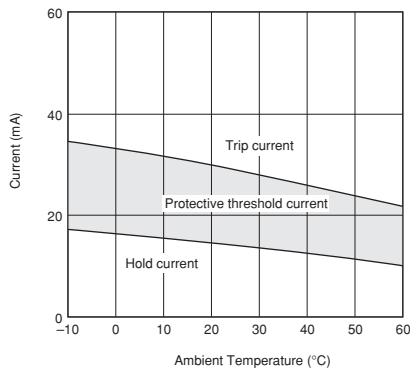

PRG18BB101MB1RB

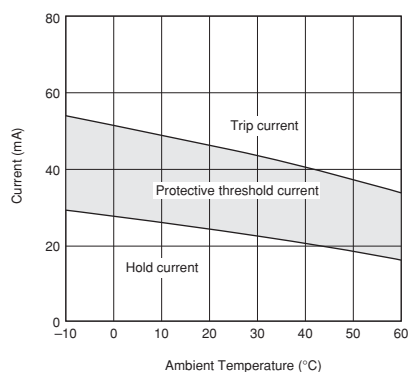

PRG18BB470MB1RB

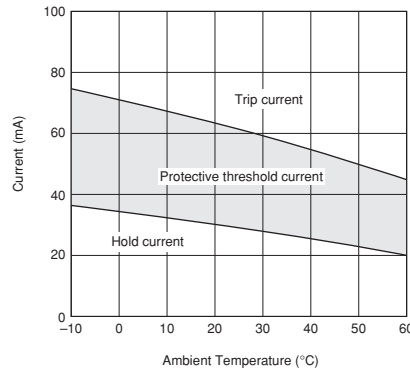


Continued on the following page. ➤


Continued from the preceding page.

## ■ Protective Threshold Current Range


PRG18BB330MB1RB

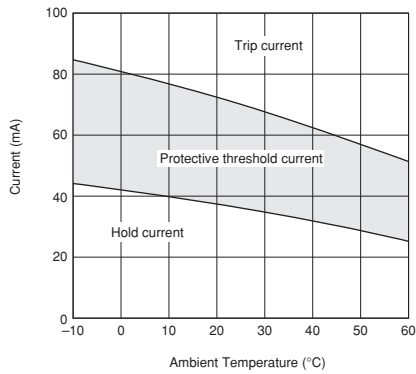


PRG18/21BC6R8M Type

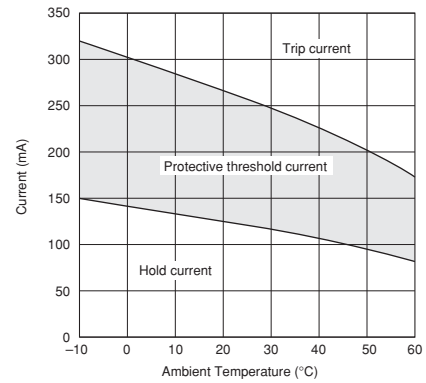


PRG18/21BC4R7M Type

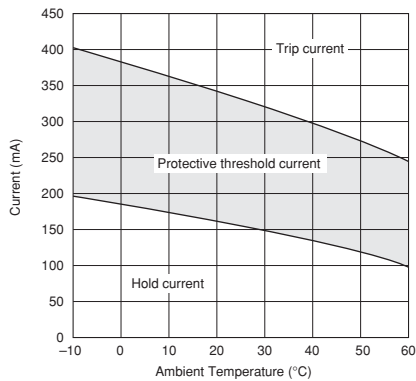


PRG18/21BC3R3M Type

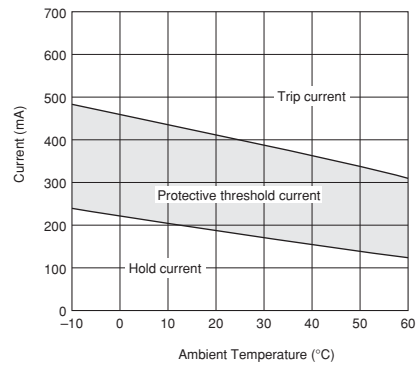


PRG18/21BC2R2M Type

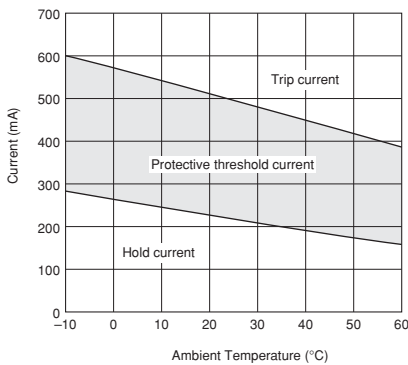


PRG18/21BC1R0M Type

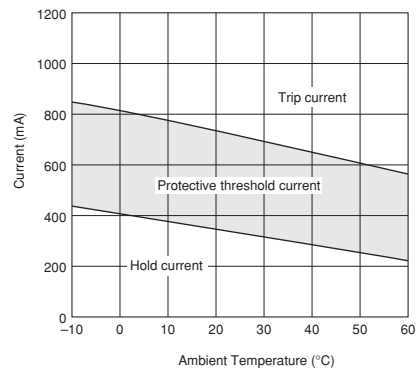

PRG21BB220MB1RK

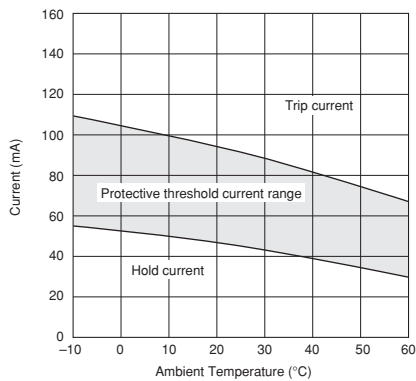

PRG21BB150MB1RK

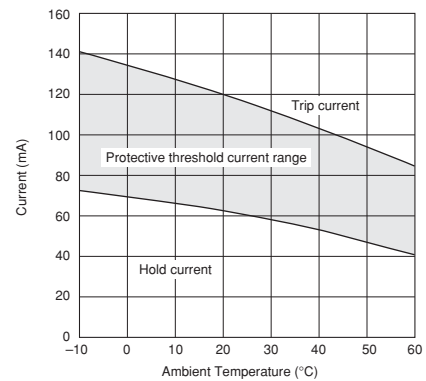


Continued on the following page. ➤


Continued from the preceding page.

## ■ Protective Threshold Current Range

PRG21BC0R6MM1RA

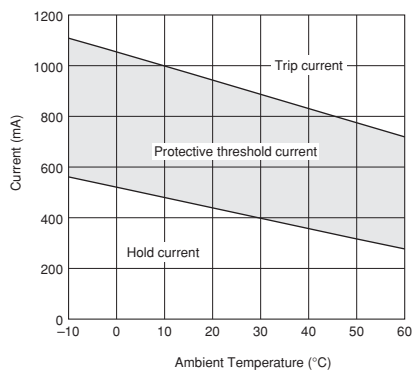


PRG21BC0R2MM1RA

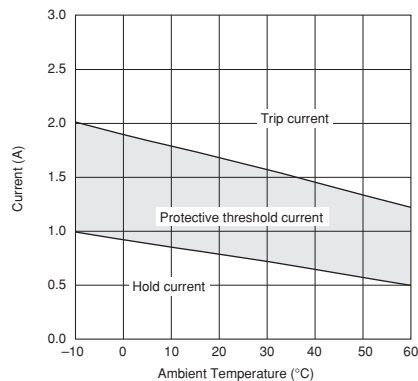


## ■ Operating Time (Typical Curve)


PRG15BC330MM1RC

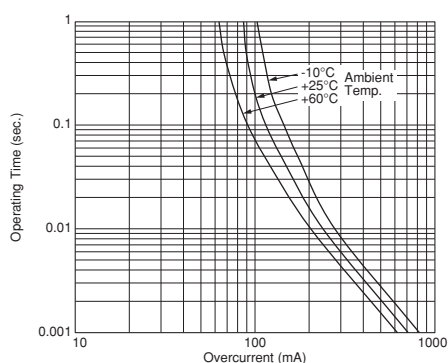


PRG15BC220MM1RC

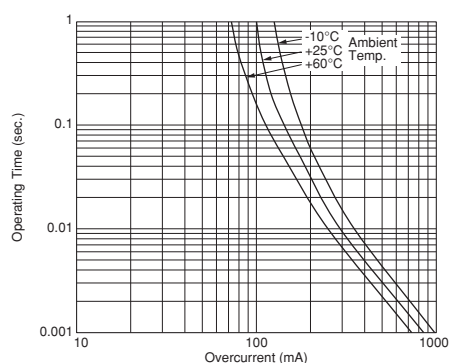


PRG15BC180MM1RC

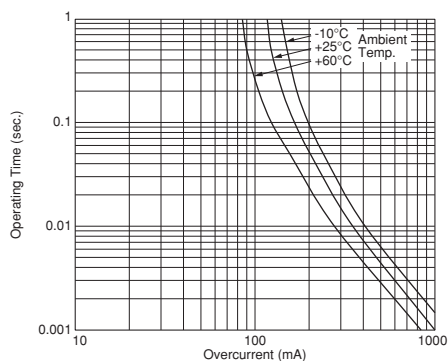


PRG15BC4R7MM1RC

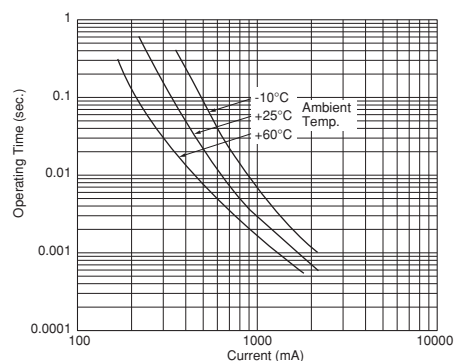

PRG15BC3R3MM1RC

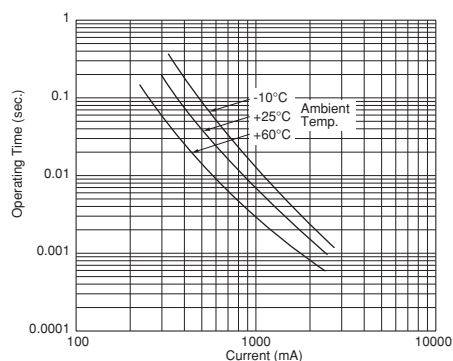

PRG15BC2R2MM1RC

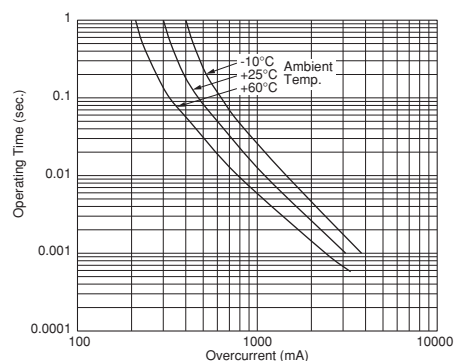


Continued on the following page. ➤


Continued from the preceding page.

## ■ Operating Time (Typical Curve)


PRG18BB471MB1RB

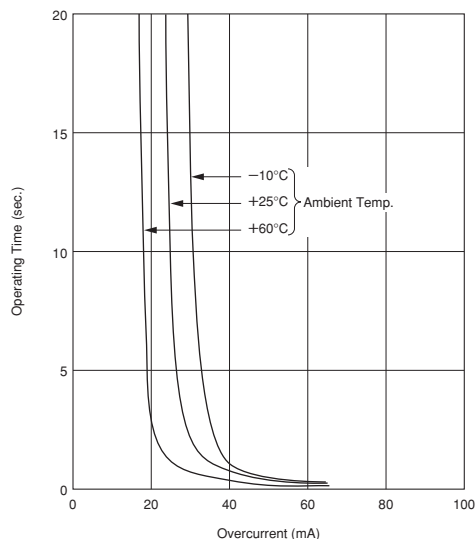


PRG18BB221MB1RB

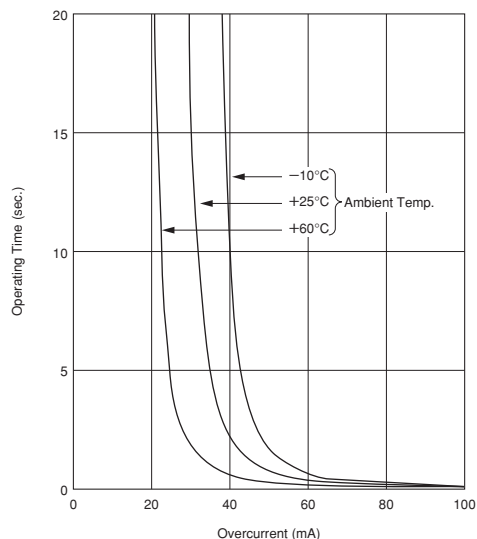


PRG18BB101MB1RB

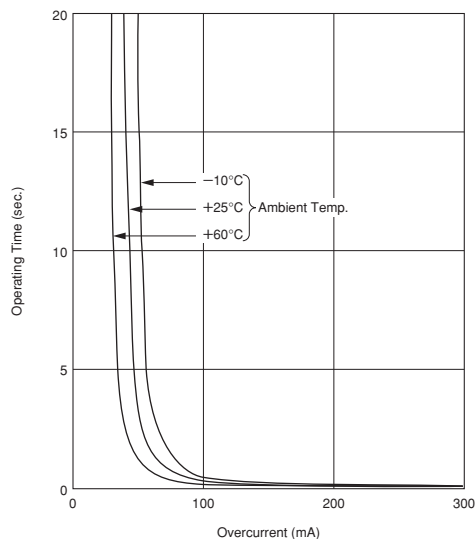


PRG18BB470MB1RB

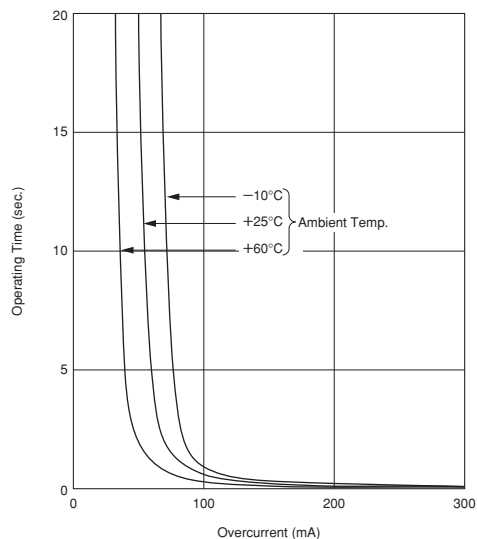

PRG18BB330MB1RB

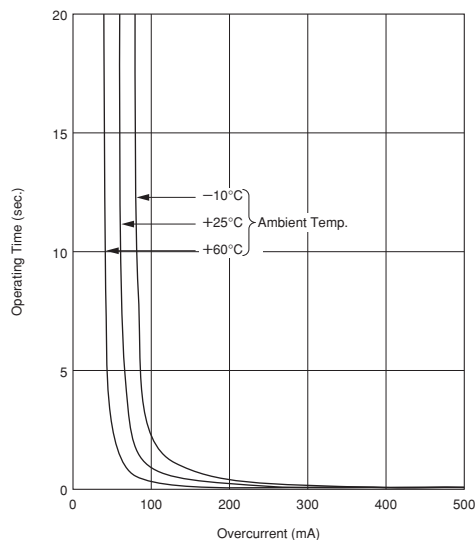

PRG18BC6R8MM1RB

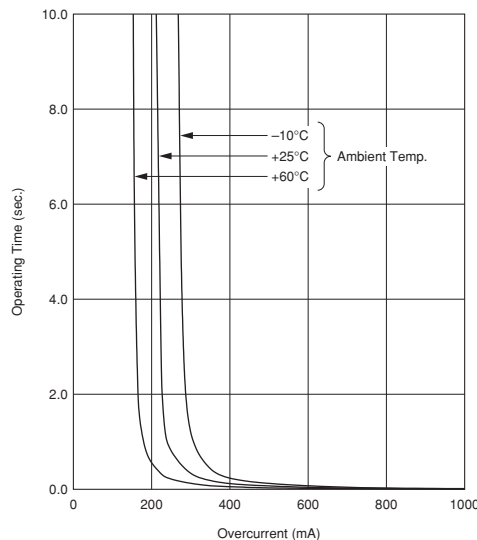


Continued on the following page. ↗


Continued from the preceding page.

## Operating Time (Typical Curve)


PRG18BC4R7MM1RB

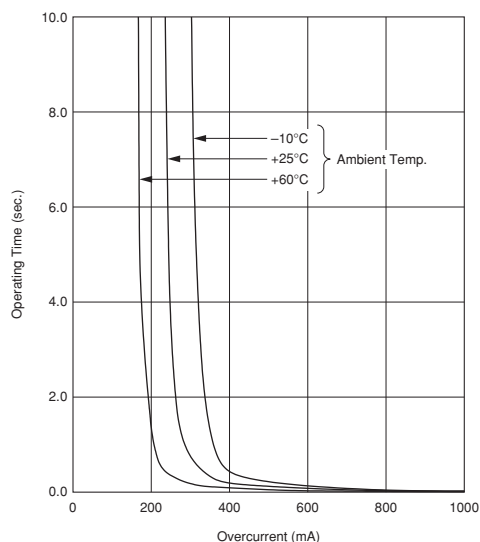


PRG18BC3R3MM1RB

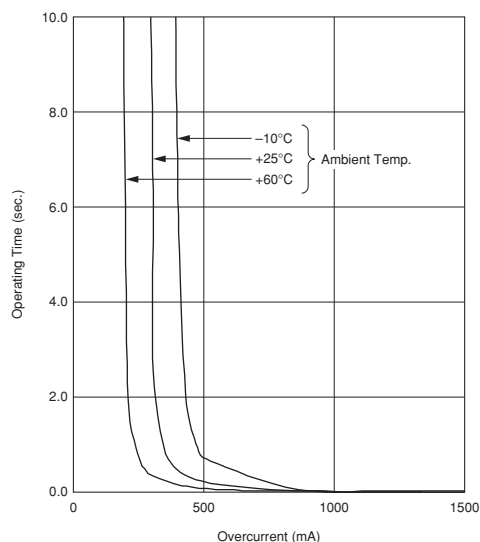


PRG18BC2R2MM1RB

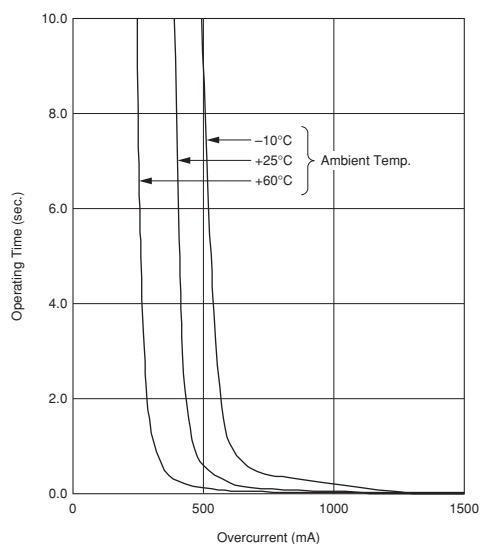


PRG18BC1R0MM1RB

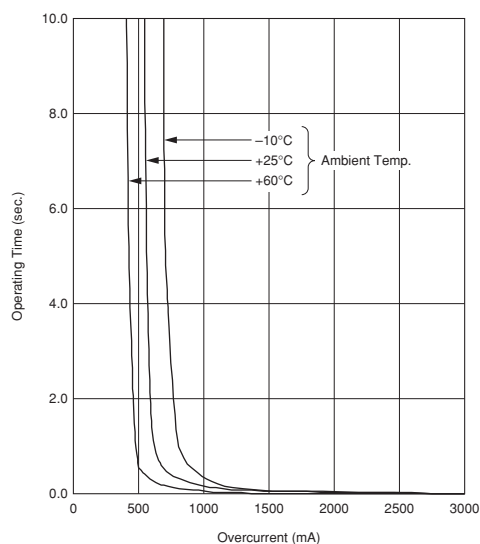

PRG21BB220MB1RK

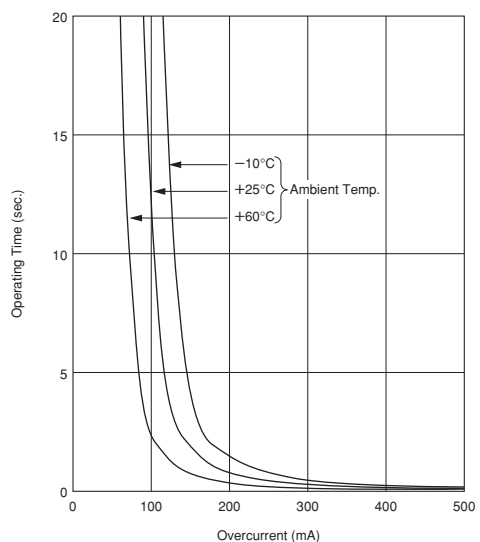

PRG21BB150MB1RK

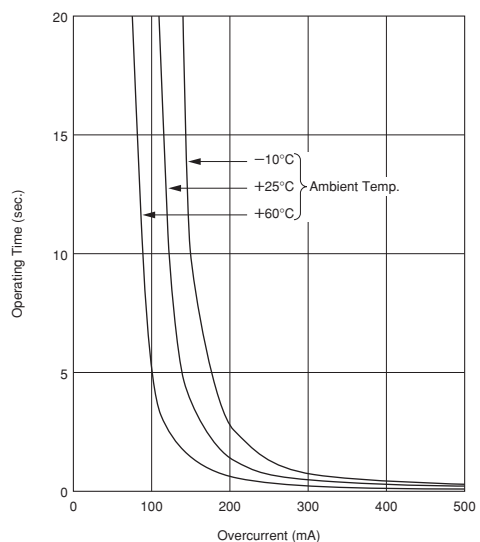


Continued on the following page. ➤


Continued from the preceding page.

## Operating Time (Typical Curve)


PRG21BC6R8MM1RA

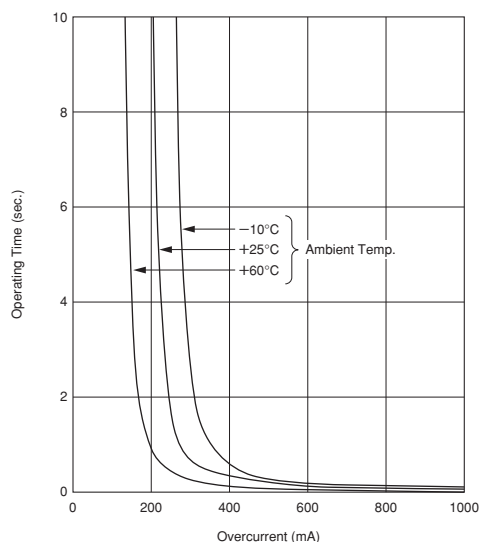


PRG21BC4R7MM1RA

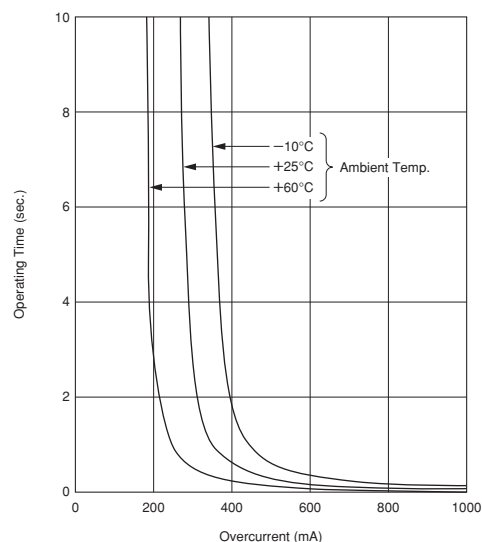


PRG21BC3R3MM1RA

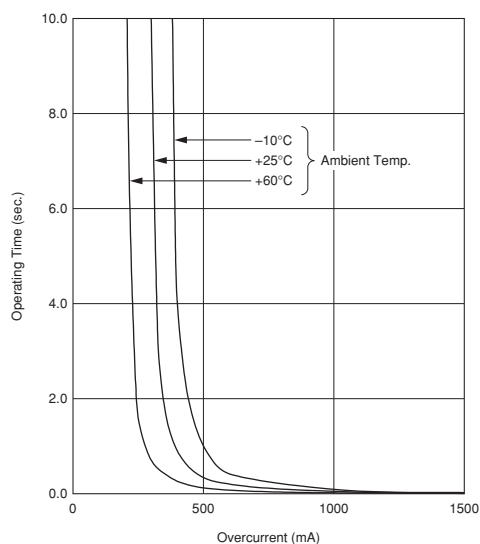


PRG21BC2R2MM1RA

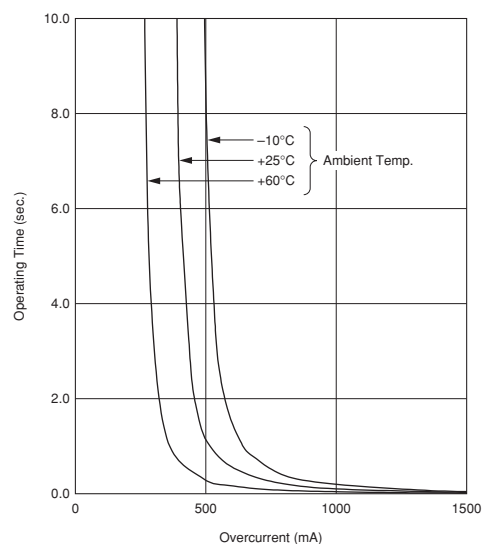

PRG21BC1R0MM1RA

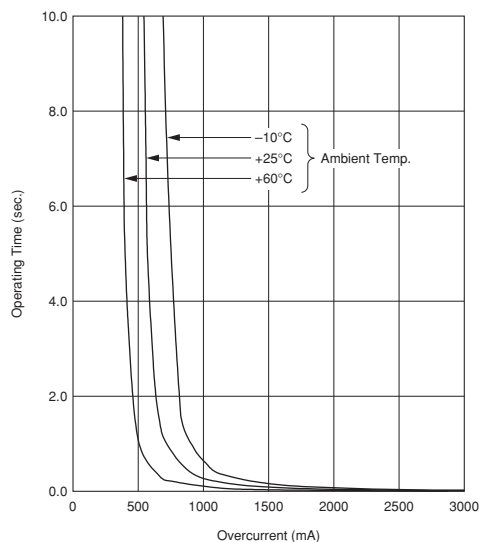

PRG21BC0R6MM1RA

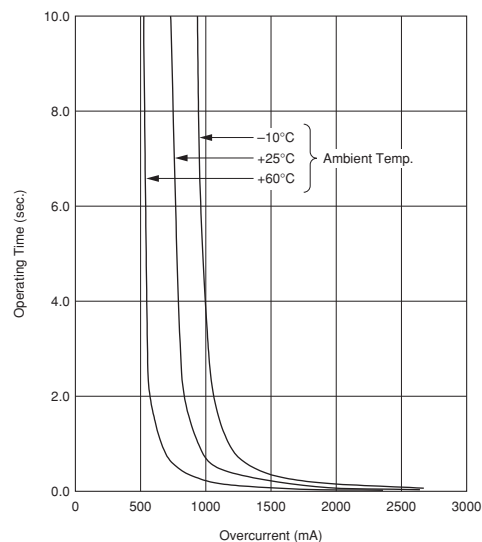


Continued on the following page. ➤

Continued from the preceding page.

## ■ Operating Time (Typical Curve)

PRG21BC0R2MM1RA

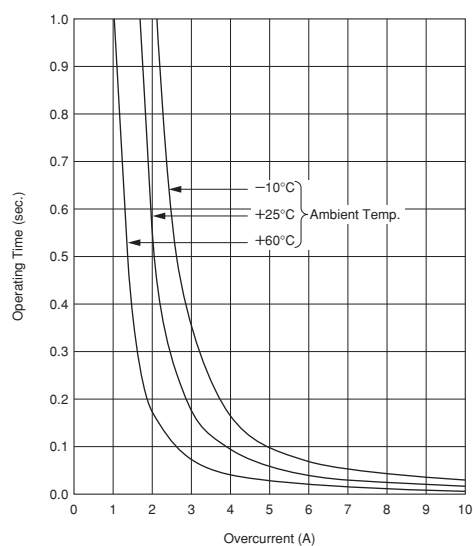

## Chip Type Specifications and Test Methods

### ■ PRG15 Series

| No.  | Item                         | Rating Value                                                                                                                               | Method of Examination                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |                |             |   |       |    |   |       |
|------|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----------------|-------------|---|-------|----|---|-------|
| 1    | Operating Temp. Range        | -10 to +60°C                                                                                                                               | Temperature range that permit to apply max. voltage to the Posistor®.                                                                                                                                                                                                                                                                                                                                                                                   |      |                |             |   |       |    |   |       |
| 2    | Resistance Value at 25°C     | Within the specified range                                                                                                                 | It is measured by below flow.<br>1) Applied max. voltage for 3 min.<br>2) Storage 2 hrs in room temperature<br>3) Measured by four-terminal method with less than 1mA (DC0.1V).                                                                                                                                                                                                                                                                         |      |                |             |   |       |    |   |       |
| 3    | Withstanding Voltage         | Without damage                                                                                                                             | The voltage which rises gradually to 120% of the max. voltage applies to the Posistor® for 180±5 sec. at 25°C.<br>(A protective resistor is to be connected in series, and the inrush current through Posistor® must be limited below max. rated value.)                                                                                                                                                                                                |      |                |             |   |       |    |   |       |
| 4    | Vibration                    | <ul style="list-style-type: none"><li>Resistance (R25) change: Less than ±20% *1</li><li>Appearance: No defects or abnormalities</li></ul> | Reference standard: IEC 60068-2-6 (1995) <ul style="list-style-type: none"><li>Soldered PTC to PCB *2</li><li>Frequency range: 10 to 55Hz</li><li>Amplitude: 1.5mm</li><li>Sweep rate: 1 octave/min.</li><li>Direction: X-Y-Z (3 direction)</li><li>24 cycles in each axis</li></ul>                                                                                                                                                                    |      |                |             |   |       |    |   |       |
| 5    | Solderability                | Wetting of soldering area: ≥75%                                                                                                            | Reference standard: IEC 60068-2-58 (2004) <ul style="list-style-type: none"><li>Solder: Sn-3.0Ag-0.5Cu</li><li>Solder temp.: 245±5°C</li><li>Immersion time: 3±0.3 s</li></ul>                                                                                                                                                                                                                                                                          |      |                |             |   |       |    |   |       |
| 6    | Resistance to Soldering Heat | <ul style="list-style-type: none"><li>Resistance (R25) change: Less than ±20% *1</li><li>Appearance: No defects or abnormalities</li></ul> | Reference standard: IEC 60068-2-58 (2004)<br>[Reflow method] <ul style="list-style-type: none"><li>Solder: Sn-3.0Ag-0.5Cu</li><li>Preheat: +150 to +180°C, 120±5 s</li><li>Peak temp.: 260±5°C</li><li>Soldering time: &gt;220°C, 60 to 90 s</li><li>Reflow cycle: 1 time</li><li>Test board: Grass-Epoxy test board (FR-4) with our standard land size *2</li></ul>                                                                                    |      |                |             |   |       |    |   |       |
| 7    | High Temperature Storage     |                                                                                                                                            | Reference standard: IEC 60068-2-2 (2007) <ul style="list-style-type: none"><li>Soldered PTC to PCB *2</li><li>+60±2°C</li><li>1000+48/-0 hrs.</li></ul>                                                                                                                                                                                                                                                                                                 |      |                |             |   |       |    |   |       |
| 8    | Low Temperature Storage      |                                                                                                                                            | Reference standard: IEC 60068-2-1 (2007) <ul style="list-style-type: none"><li>Soldered PTC to PCB *2</li><li>-10±3°C</li><li>1000+48/-0 hrs</li></ul>                                                                                                                                                                                                                                                                                                  |      |                |             |   |       |    |   |       |
| 9    | Damp Heat, Steady State      |                                                                                                                                            | Reference standard: IEC 60068-2-67 (1995) <ul style="list-style-type: none"><li>Soldered PTC to PCB *2</li><li>+40±2°C, 90±5%RH</li><li>500+24/-0 hrs</li></ul>                                                                                                                                                                                                                                                                                         |      |                |             |   |       |    |   |       |
| 10   | Thermal Shock *3             |                                                                                                                                            | Reference standard: IEC 60068-2-14 (2009)<br>[Test Na] <ul style="list-style-type: none"><li>Soldered PTC to PCB *2</li><li>Transport time: &lt;10 sec.</li><li>Test condition: See below table</li></ul> <table><tr><th>Step</th><th>Condition (°C)</th><th>Time (min.)</th></tr><tr><td>1</td><td>-20±3</td><td>30</td></tr><tr><td>2</td><td>+85±3</td><td>30</td></tr></table> <ul style="list-style-type: none"><li>Test cycle: 5 cycles</li></ul> | Step | Condition (°C) | Time (min.) | 1 | -20±3 | 30 | 2 | +85±3 |
| Step | Condition (°C)               | Time (min.)                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                         |      |                |             |   |       |    |   |       |
| 1    | -20±3                        | 30                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                         |      |                |             |   |       |    |   |       |
| 2    | +85±3                        | 30                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                         |      |                |             |   |       |    |   |       |
| 11   | High Temperature Load        |                                                                                                                                            | Reference standard: IEC 60068-2-2 (2007) <ul style="list-style-type: none"><li>Soldered PTC to PCB *2</li><li>+60±2°C</li><li>Applied max. voltage</li><li>1000+48/-0 hrs.</li></ul>                                                                                                                                                                                                                                                                    |      |                |             |   |       |    |   |       |

\*1: The resistance value after the test is measured by 4-terminal method with less than 10mA (DC0.1V), after storage in 25±2°C for 2 hrs.

\*2: Above mentioned soldering is done following condition at our side.

- Glass-Epoxy PC board
- Standard land dimension
- Standard solder paste
- Standard solder profile

Above conditions are mentioned in Notice.

\*3: We cannot guarantee the resistance change in Thermal Shock in case of defective mounting.

(Note)

No.11 High Temperature Load is based on Glass-Epoxy PC board which thermal dissipation coefficient of a mounting state is 2.2mW/°C. In other condition of 2.2mW/°C, High Temperature Load characteristics may change.

## Chip Type Specifications and Test Methods

1

### ■ PRG18/21BB Series

| No.  | Item                         | Rating Value                                                                                                                                                                                                                                                                                                            | Metheod of Examination                                                                                                                                                                                                                                                                                                             |         |           |      |              |         |        |     |         |        |
|------|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------|------|--------------|---------|--------|-----|---------|--------|
| 1    | Operating Temp.              | -10 to 60°C                                                                                                                                                                                                                                                                                                             | Temperature range with maximum voltage applied to PTC.                                                                                                                                                                                                                                                                             |         |           |      |              |         |        |     |         |        |
| 2    | Resistance Value at 25°C     | Within the specified range                                                                                                                                                                                                                                                                                              | After applying maximum operating voltage for 3 mins. and leaving for 2 hours in 25°C, measured by applying voltage less than DC1.5V. (by a direct current less than 10mA)                                                                                                                                                          |         |           |      |              |         |        |     |         |        |
| 3    | Withstanding Voltage         | Without damage                                                                                                                                                                                                                                                                                                          | We apply 120% of the maximum operating voltage to PTC by raising gradually for 180±5 secs. at 25°C. (A protective resistor is to be connected in series, and the inrush current through PTC must be limited below maximum rated value.)                                                                                            |         |           |      |              |         |        |     |         |        |
| 4    | Adhesive Strength            | There is no sign of exfoliation on electrode.                                                                                                                                                                                                                                                                           | Reference standard: IEC 60068-2-21 (2006)<br>· Soldered PTC to PCB (**)<br>· Force: 5.0N<br>· Test time: 10 sec.                                                                                                                                                                                                                   |         |           |      |              |         |        |     |         |        |
| 5    | Vibration                    | · Appearance: No defects or abnormalities<br>· Resistance (R25) change: Less than ±20% (*)                                                                                                                                                                                                                              | Reference standard: IEC 60068-2-6 (2007)<br>· Soldered PTC to PCB (**)<br>· Frequency range: 10 to 55Hz<br>· Amplitude: 1.5mm<br>· Sweep rate: 1 octave/min.<br>· Direction: X-Y-Z (3 direction)<br>· 24 cycles in each axis                                                                                                       |         |           |      |              |         |        |     |         |        |
| 6    | Solderability                | Wetting of soldering area: ≥75%                                                                                                                                                                                                                                                                                         | Reference standard: IEC 60068-2-58 (2004)<br>· Solder: Sn-3.0Ag-0.5Cu<br>· Solder temp.: 245±5°C<br>· Immersion time: 3±0.3s                                                                                                                                                                                                       |         |           |      |              |         |        |     |         |        |
| 7    | Resistance to Soldering Heat | · Appearance: No defects or abnormalities<br>· Resistance (R25) change: Less than ±20% (*)                                                                                                                                                                                                                              | Reference standard: IEC 60068-2-58 (2004)<br>[Reflow method]<br>· Solder: Sn-3.0Ag-0.5Cu<br>· Preheat: +150 to +180°C, 120+/-5s<br>· Peak temp: 260+/-5°C<br>· Soldering time: ≥220°C, 60 to 90s<br>· Reflow cycle: 1 time<br>· Test board: Grass-Epoxy test board (FR-4) with our standard land size                              |         |           |      |              |         |        |     |         |        |
| 8    | High Temperature Storage     | · Appearance: No defects or abnormalities<br>· Resistance (R25) change: Less than ±20% (*)                                                                                                                                                                                                                              | Reference standard: IEC 60068-2-2 (2007)<br>· Soldered PTC to PCB (**)<br>· +60±2°C<br>· 1000+48/-0 hrs.                                                                                                                                                                                                                           |         |           |      |              |         |        |     |         |        |
| 9    | Low Temperature Storage      |                                                                                                                                                                                                                                                                                                                         | Reference standard: IEC 60068-2-1 (2007)<br>· Soldered PTC to PCB (**)<br>· -10±3°C<br>· 1000+48/-0 hrs                                                                                                                                                                                                                            |         |           |      |              |         |        |     |         |        |
| 10   | Damp Heat, Steady State      |                                                                                                                                                                                                                                                                                                                         | Reference standard: IEC 60068-2-67 (1995)<br>· Soldered PTC to PCB (**)<br>· +40±2°C, 90±5%RH<br>· 500+24/-0 hrs                                                                                                                                                                                                                   |         |           |      |              |         |        |     |         |        |
| 11   | Thermal Shock                |                                                                                                                                                                                                                                                                                                                         | Reference standard: IEC 60068-2-14 (2009)<br>[ Test Na ]<br>· Soldered PTC to PCB (**)<br>· Transport time: <10 sec.<br>· Test condition: See below table <table><tr><th>Step</th><th>Condition</th><th>Time</th></tr><tr><td>1</td><td>-20±3°C</td><td>30min.</td></tr><tr><td>2</td><td>+85±2°C</td><td>30min.</td></tr></table> | Step    | Condition | Time | 1            | -20±3°C | 30min. | 2   | +85±2°C | 30min. |
| Step | Condition                    |                                                                                                                                                                                                                                                                                                                         | Time                                                                                                                                                                                                                                                                                                                               |         |           |      |              |         |        |     |         |        |
| 1    | -20±3°C                      | 30min.                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                    |         |           |      |              |         |        |     |         |        |
| 2    | +85±2°C                      | 30min.                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                    |         |           |      |              |         |        |     |         |        |
| 12   | High Temperature Load        | Reference standard: IEC 60068-2-2 (2007)<br>· Soldered PTC to PCB (**)<br>· +60±2°C<br>· Applied voltage: See below table <table><tr><th>Step</th><th>Voltage</th><th>Time</th></tr><tr><td>1</td><td>Max. voltage</td><td>1.5hrs.</td></tr><tr><td>2</td><td>OFF</td><td>0.5hrs.</td></tr></table><br>· 500+24/-0 hrs. | Step                                                                                                                                                                                                                                                                                                                               | Voltage | Time      | 1    | Max. voltage | 1.5hrs. | 2      | OFF | 0.5hrs. |        |
| Step | Voltage                      | Time                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                    |         |           |      |              |         |        |     |         |        |
| 1    | Max. voltage                 | 1.5hrs.                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                    |         |           |      |              |         |        |     |         |        |
| 2    | OFF                          | 0.5hrs.                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                    |         |           |      |              |         |        |     |         |        |

\*: The resistance value after the test. It is measured by applying voltage less than DC1.5V (by a direct current less than 10mA) after left at 25±2°C for 2hrs.

\*\* : Above mentioned soldering is done under the following conditions at our side.

- Glass-Epoxy PC board
  - Standard solder paste
  - Standard land dimension
  - Standard solder profile
- Above conditions are mentioned in Notice.

## Chip Type Specifications and Test Methods

### ■ PRG18/21BC Series

| No.  | Item                         | Rating Value                                                                                                                                                                                                                                                                                                               | Metheed of Examination                                                                                                                                                                                                                                                                                                                |         |           |      |              |         |        |     |         |        |
|------|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------|------|--------------|---------|--------|-----|---------|--------|
| 1    | Operating Temp.              | -10 to 60°C                                                                                                                                                                                                                                                                                                                | Temperature range with maximum voltage applied to PTC.                                                                                                                                                                                                                                                                                |         |           |      |              |         |        |     |         |        |
| 2    | Resistance Value at 25°C     | Within the specified range                                                                                                                                                                                                                                                                                                 | After applying maximum operating voltage for 3 mins. and leaving for 2 hours in 25°C, measured by applying voltage less than DC1.5V. (by a direct current less than 10mA)                                                                                                                                                             |         |           |      |              |         |        |     |         |        |
| 3    | Withstanding Voltage         | Without damage                                                                                                                                                                                                                                                                                                             | We apply 120% of the maximum operating voltage to PTC by raising gradually for 180±5 secs. at 25°C. (A protective resistor is to be connected in series, and the inrush current through PTC must be limited below maximum rated value.)                                                                                               |         |           |      |              |         |        |     |         |        |
| 4    | Adhesive Strength            | There is no sign of exfoliation on electrode.                                                                                                                                                                                                                                                                              | Reference standard: IEC 60068-2-21 (2006)<br>· Soldered PTC to PCB (**)<br>· Force: 5.0N<br>· Test time: 10 sec.                                                                                                                                                                                                                      |         |           |      |              |         |        |     |         |        |
| 5    | Vibration                    | · Appearance: No defects or abnormalities<br>· Resistance (R25) change: Less than ±20% (*)                                                                                                                                                                                                                                 | Reference standard: IEC 60068-2-6 (2007)<br>· Soldered PTC to PCB (**)<br>· Frequency range: 10 to 55Hz<br>· Amplitude: 1.5mm<br>· Sweep rate: 1 octave/min.<br>· Direction: X-Y-Z (3 direction)<br>· 24 cycles in each axis                                                                                                          |         |           |      |              |         |        |     |         |        |
| 6    | Solderability                | Wetting of soldering area: ≥75%                                                                                                                                                                                                                                                                                            | Reference standard: IEC 60068-2-58 (2004)<br>· Solder: Sn-3.0Ag-0.5Cu<br>· Solder temp.: 245±5°C<br>· Immersion time: 3±0.3s                                                                                                                                                                                                          |         |           |      |              |         |        |     |         |        |
| 7    | Resistance to Soldering Heat | · Appearance: No defects or abnormalities<br>· Resistance (R25) change: Less than ±20% (*)                                                                                                                                                                                                                                 | Reference standard: IEC 60068-2-58 (2004)<br>[Reflow method]<br>· Solder: Sn-3.0Ag-0.5Cu<br>· Preheat: +150 to +180°C, 120+/-5s<br>· Peak temp: 260+/-5°C<br>· Soldering time: ≥220°C, 60 to 90s<br>· Reflow cycle: 1 time<br>· Test board: Grass-Epoxy test board (FR-4) with our standard land size                                 |         |           |      |              |         |        |     |         |        |
| 8    | High Temperature Storage     | · Appearance: No defects or abnormalities<br>· Resistance (R25) change: Less than ±20% (*)                                                                                                                                                                                                                                 | Reference standard: IEC 60068-2-2 (2007)<br>· Soldered PTC to PCB (**)<br>· +60±2°C<br>· 1000+48/-0 hrs.                                                                                                                                                                                                                              |         |           |      |              |         |        |     |         |        |
| 9    | Low Temperature Storage      |                                                                                                                                                                                                                                                                                                                            | Reference standard: IEC 60068-2-1 (2007)<br>· Soldered PTC to PCB (**)<br>· -10±3°C<br>· 1000+48/-0 hrs                                                                                                                                                                                                                               |         |           |      |              |         |        |     |         |        |
| 10   | Damp Heat, Steady State      |                                                                                                                                                                                                                                                                                                                            | Reference standard: IEC 60068-2-67 (1995)<br>· Soldered PTC to PCB (**)<br>· +60±2°C, 90±5%RH<br>· 500+24/-0 hrs                                                                                                                                                                                                                      |         |           |      |              |         |        |     |         |        |
| 11   | Thermal Shock                |                                                                                                                                                                                                                                                                                                                            | Reference standard: IEC 60068-2-14 (2009)<br>[ Test Na ]<br>· Soldered PTC to PCB (**)<br>· Transport time: <10 sec.<br>· Test condition: See below table<br><table><tr><th>Step</th><th>Condition</th><th>Time</th></tr><tr><td>1</td><td>-20±3°C</td><td>30min.</td></tr><tr><td>2</td><td>+85±2°C</td><td>30min.</td></tr></table> | Step    | Condition | Time | 1            | -20±3°C | 30min. | 2   | +85±2°C | 30min. |
| Step | Condition                    |                                                                                                                                                                                                                                                                                                                            | Time                                                                                                                                                                                                                                                                                                                                  |         |           |      |              |         |        |     |         |        |
| 1    | -20±3°C                      | 30min.                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                       |         |           |      |              |         |        |     |         |        |
| 2    | +85±2°C                      | 30min.                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                       |         |           |      |              |         |        |     |         |        |
| 12   | High Temperature Load        | Reference standard: IEC 60068-2-2 (2007)<br>· Soldered PTC to PCB (**)<br>· +60±2°C<br>· Applied voltage: See below table<br><table><tr><th>Step</th><th>Voltage</th><th>Time</th></tr><tr><td>1</td><td>Max. voltage</td><td>1.5hrs.</td></tr><tr><td>2</td><td>OFF</td><td>0.5hrs.</td></tr></table><br>· 500+24/-0 hrs. | Step                                                                                                                                                                                                                                                                                                                                  | Voltage | Time      | 1    | Max. voltage | 1.5hrs. | 2      | OFF | 0.5hrs. |        |
| Step | Voltage                      | Time                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                       |         |           |      |              |         |        |     |         |        |
| 1    | Max. voltage                 | 1.5hrs.                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                       |         |           |      |              |         |        |     |         |        |
| 2    | OFF                          | 0.5hrs.                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                       |         |           |      |              |         |        |     |         |        |

\*: The resistance value after the test. It is measured by applying voltage less than DC1.5V (by a direct current less than 10mA) after left at 25±2°C for 2hrs.

\*\* : Above mentioned soldering is done under the following conditions at our side.

- Glass-Epoxy PC board
  - Standard solder paste
  - Standard land dimension
  - Standard solder profile
- Above conditions are mentioned in Notice.

# POSISTOR® for Circuit Protection

**muRata**


## Overcurrent Protection Narrow Current Band 30V Series

2

This product is a leaded type PTC thermistor for overcurrent protection which is suitable for a current limiting resistor.

### ■ Features

1. Small fluctuation in the circuit due to resistance tolerance  $\pm 10\%$
2. Narrow current range (less than twice) between operating and non-operating current at  $-10$  to  $60$  degrees C.
3. Quick operating time due to small size compared with conventional products.
4. Best suited to meet the requirements for power supplies and motor protection. Error-free operations are assured by rush current.
5. Circuit is protected until current is turned off.
6. Restores the original low resistance value automatically once the overload is removed.
7. Non-contact design leads to long life and no noise.  
Durable and strong against mechanical vibration and shock because it is a solid element.

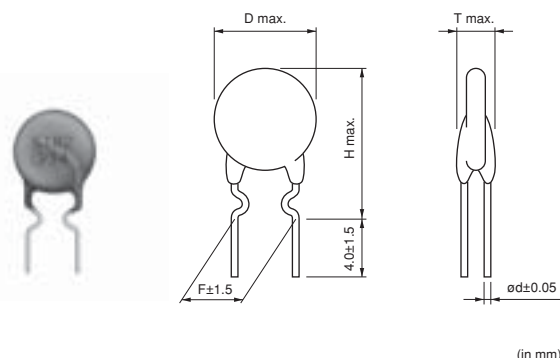

| Part Number        | Max. Voltage (V) | Hold Current (at +60°C) (mA) | Hold Current (at +25°C) (mA) | Trip Current (at +25°C) (mA) | Trip Current (at -10°C) (mA) | Max. Current (A) | Resistance (at +25°C) (ohm) | Body Diameter (D) (mm) | Thickness (T) (mm) | Height (H) (mm) | Lead Space (F) (mm) | Lead Diameter (phi d) (mm) |
|--------------------|------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------|-----------------------------|------------------------|--------------------|-----------------|---------------------|----------------------------|
| PTGL04AS100K2N51B0 | 30               | 122                          | 154                          | 205                          | 240                          | 1.5              | $10 \pm 10\%$               | 4.5                    | 3.5                | 9.5             | 5.0                 | 0.5                        |
| PTGL04AS100K2B51B0 | 30               | 167                          | 212                          | 282                          | 330                          | 2.0              | $10 \pm 10\%$               | 4.5                    | 3.5                | 9.5             | 5.0                 | 0.6                        |
| PTGL05AS3R9K2B51B0 | 30               | 269                          | 340                          | 452                          | 530                          | 3.5              | $3.9 \pm 10\%$              | 5.5                    | 3.5                | 10.5            | 5.0                 | 0.6                        |
| PTGL07AS2R7K2B51B0 | 30               | 336                          | 425                          | 565                          | 663                          | 4.5              | $2.7 \pm 10\%$              | 7.3                    | 3.5                | 12.3            | 5.0                 | 0.6                        |
| PTGL07AS1R8K2B51B0 | 30               | 420                          | 532                          | 708                          | 829                          | 5.0              | $1.8 \pm 10\%$              | 7.3                    | 3.5                | 12.3            | 5.0                 | 0.6                        |
| PTGL09AS1R2K2B51B0 | 30               | 556                          | 704                          | 936                          | 1097                         | 6.0              | $1.2 \pm 10\%$              | 9.3                    | 3.5                | 14.3            | 5.0                 | 0.6                        |
| PTGL12AS0R8K2B51B0 | 30               | 685                          | 867                          | 1153                         | 1352                         | 7.0              | $0.8 \pm 10\%$              | 11.5                   | 3.5                | 16.5            | 5.0                 | 0.6                        |


Maximum Current shows typical capacities of the transformer which can be used.

30V Series is recognized by UL.


Taping type is also available. Please refer to the page of "Package" information for details.

### ■ Protective Threshold Current Range

PTGL04AS100K2N51B0

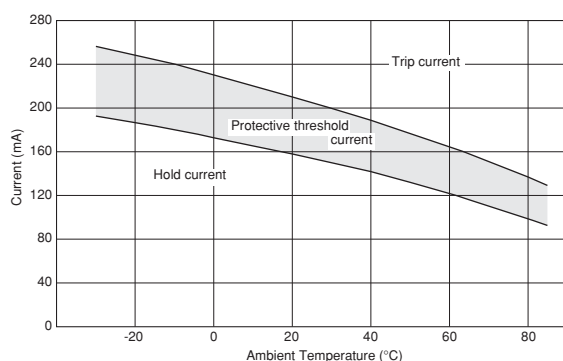

PTGL04AS100K2B51B0

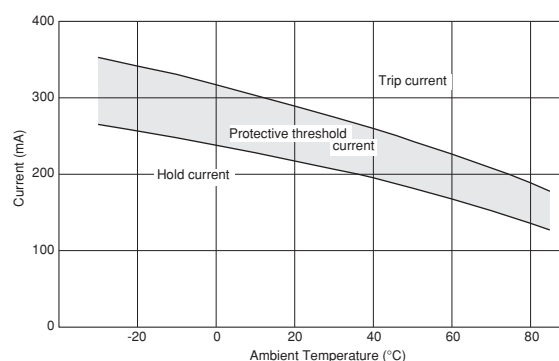


Continued on the following page.


Continued from the preceding page.

## ■ Protective Threshold Current Range


PTGL05AS3R9K2B51B0

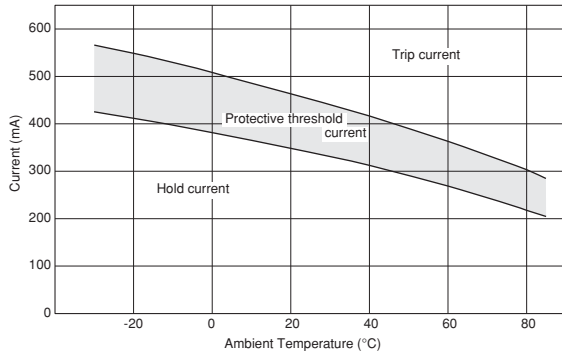


PTGL07AS2R7K2B51B0

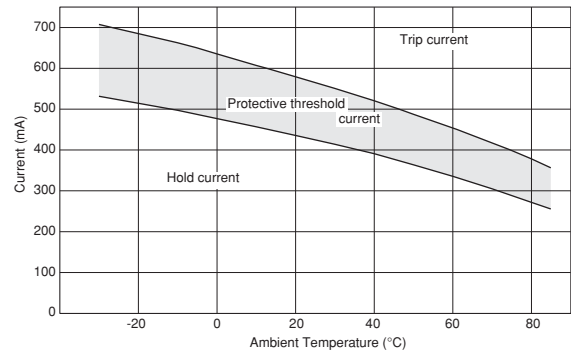


PTGL07AS1R8K2B51B0

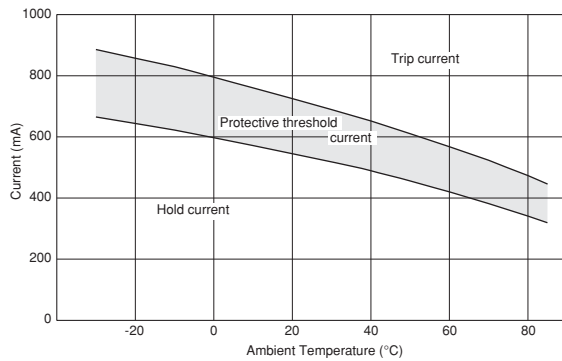

PTGL09AS1R2K2B51B0

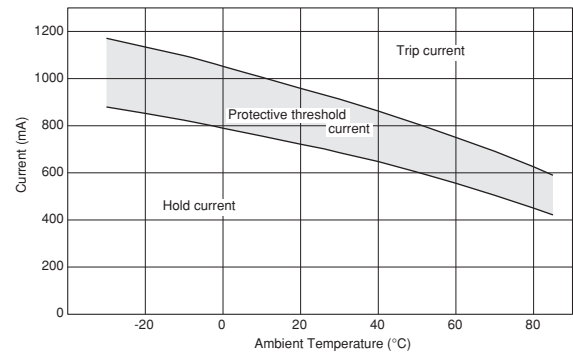


PTGL12AS0R8K2B51B0

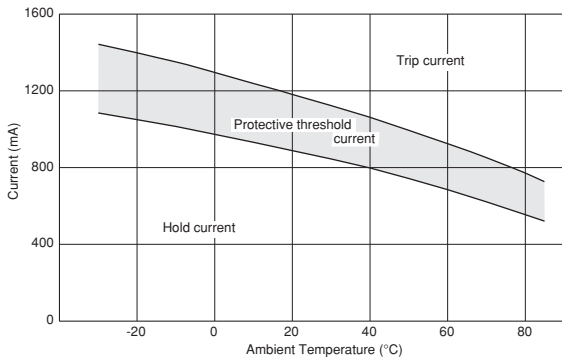


## ■ Operating Time (Typical Curve)

PTGL04AS100K2N51B0

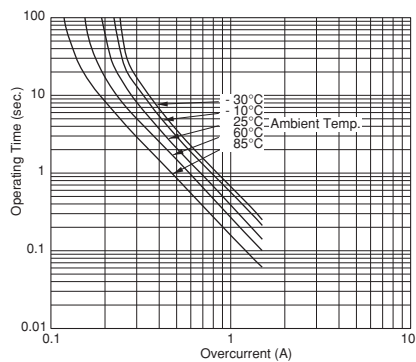

PTGL04AS100K2B51B0

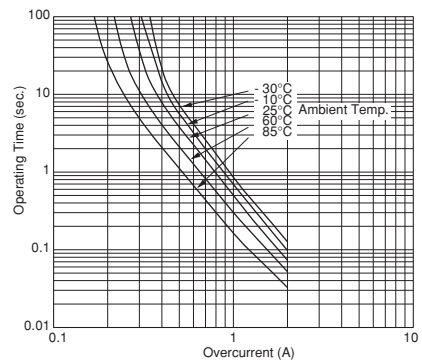


Continued on the following page. ➤


Continued from the preceding page.

## Operating Time (Typical Curve)


PTGL05AS3R9K2B51B0

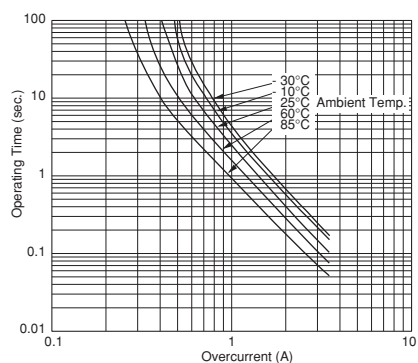


PTGL07AS2R7K2B51B0

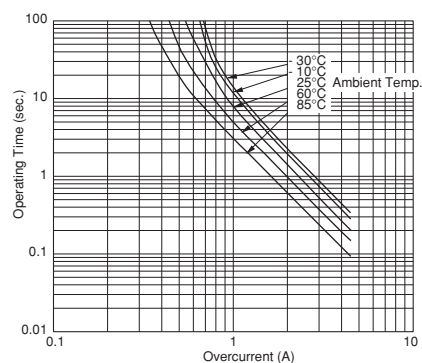


PTGL07AS1R8K2B51B0

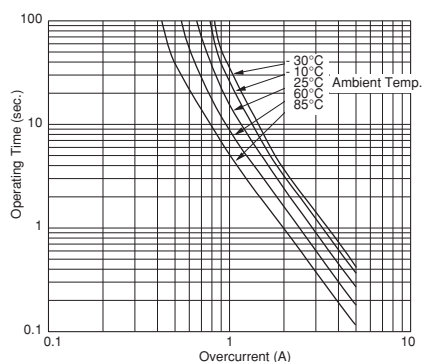

PTGL09AS1R2K2B51B0

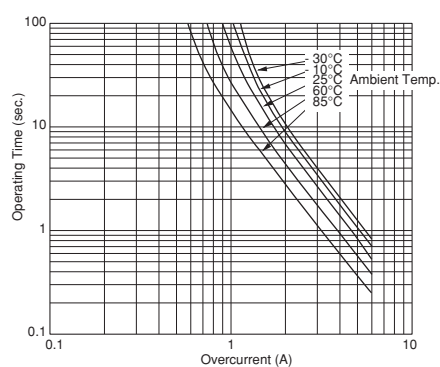

PTGL12AS0R8K2B51B0

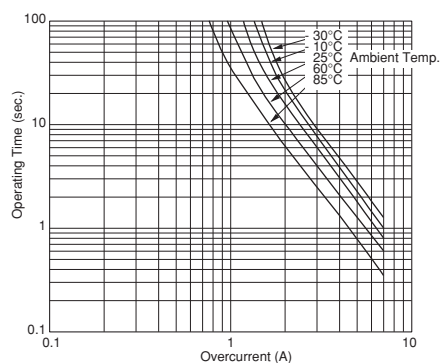

# POSISTOR® for Circuit Protection

**muRata**


## Overcurrent Protection Narrow Current Band 51/60V Series

3

This product is a leaded type PTC thermistor for overcurrent protection which is suitable for a current limiting resistor.

### ■ Features

1. Small fluctuation in the circuit due to resistance tolerance  $\pm 10\%$
2. Narrow current range (less than twice) between operating and non-operating current at  $-10$  to  $60$  degrees C.
3. Quick operating time due to small size compared with conventional products.
4. Best suited to meet the requirements for power supplies and motor protection. Error-free operations are assured by rush current.
5. Circuit is protected until current is turned off.
6. Restores the original low resistance value automatically once the overload is removed.
7. Non-contact design leads to long life and no noise.  
Durable and strong against mechanical vibration and shock because it is a solid element.

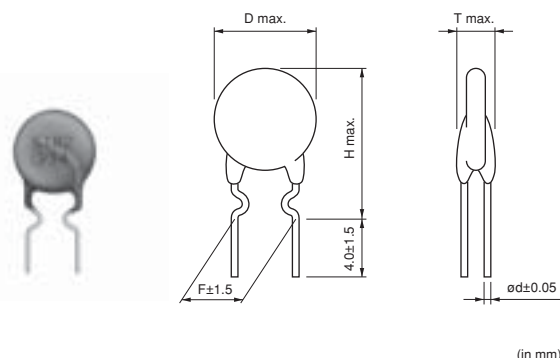

(in mm)

| Part Number        | Max. Voltage (V) | Hold Current (at +60°C) (mA) | Hold Current (at +25°C) (mA) | Trip Current (at +25°C) (mA) | Trip Current (at -10°C) (mA) | Max. Current (A) | Resistance (at +25°C) (ohm) | Body Diameter (D) (mm) | Thickness (T) (mm) | Height (H) (mm) | Lead Space (F) (mm) | Lead Diameter (phi d) (mm) |
|--------------------|------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------|-----------------------------|------------------------|--------------------|-----------------|---------------------|----------------------------|
| PTGL04AS100K3B51B0 | 51               | 168                          | 213                          | 283                          | 332                          | 1.0              | 10 $\pm 10\%$               | 4.5                    | 3.5                | 9.5             | 5.0                 | 0.6                        |
| PTGL05AS6R8K3B51B0 | 51               | 197                          | 249                          | 331                          | 388                          | 1.5              | 6.8 $\pm 10\%$              | 5.5                    | 3.5                | 10.5            | 5.0                 | 0.6                        |
| PTGL07AS3R3K3B51B0 | 51               | 307                          | 389                          | 517                          | 606                          | 3.0              | 3.3 $\pm 10\%$              | 7.3                    | 3.5                | 12.3            | 5.0                 | 0.6                        |
| PTGL09AS2R2K3B51B0 | 51               | 412                          | 522                          | 694                          | 814                          | 4.0              | 2.2 $\pm 10\%$              | 9.3                    | 3.5                | 14.3            | 5.0                 | 0.6                        |
| PTGL12AS1R2K3B51B0 | 51               | 592                          | 749                          | 996                          | 1168                         | 5.0              | 1.2 $\pm 10\%$              | 11.5                   | 3.5                | 16.5            | 5.0                 | 0.6                        |
| PTGL04AS220K4N51B0 | 60               | 88                           | 112                          | 149                          | 175                          | 1.0              | 22 $\pm 10\%$               | 4.5                    | 3.5                | 9.5             | 5.0                 | 0.5                        |
| PTGL04AS220K4B51B0 | 60               | 115                          | 145                          | 193                          | 226                          | 1.0              | 22 $\pm 10\%$               | 4.5                    | 3.5                | 9.5             | 5.0                 | 0.6                        |
| PTGL05AS100K4B51B0 | 60               | 170                          | 215                          | 286                          | 335                          | 1.5              | 10 $\pm 10\%$               | 5.5                    | 3.5                | 10.5            | 5.0                 | 0.6                        |
| PTGL07AS5R6K4N51B0 | 60               | 186                          | 236                          | 314                          | 368                          | 2.2              | 5.6 $\pm 10\%$              | 7.3                    | 3.5                | 12.3            | 5.0                 | 0.5                        |
| PTGL07AS5R6K4B51B0 | 60               | 229                          | 290                          | 386                          | 452                          | 3.0              | 5.6 $\pm 10\%$              | 7.3                    | 3.5                | 12.3            | 5.0                 | 0.6                        |
| PTGL09AS3R3K4B51B0 | 60               | 333                          | 421                          | 560                          | 656                          | 4.0              | 3.3 $\pm 10\%$              | 9.3                    | 3.5                | 14.3            | 5.0                 | 0.6                        |
| PTGL12AS2R2K4B51B0 | 60               | 439                          | 556                          | 739                          | 867                          | 5.0              | 2.2 $\pm 10\%$              | 11.5                   | 3.5                | 16.5            | 5.0                 | 0.6                        |


Maximum Current shows typical capacities of the transformer which can be used.

51/60V Series are recognized by UL.


Taping type is also available. Please refer to the page of "Package" information for details.

## ■ Protective Threshold Current Range (51V Series)


PTGL04AS100K3B51B0

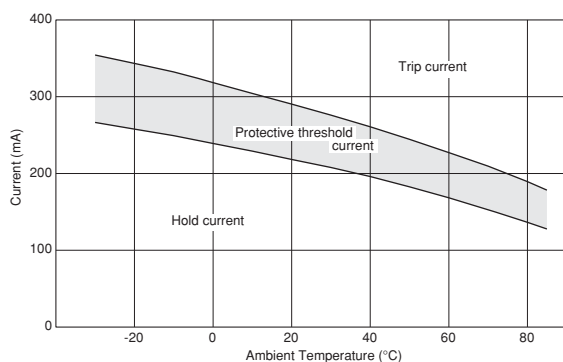


PTGL05AS6R8K3B51B0

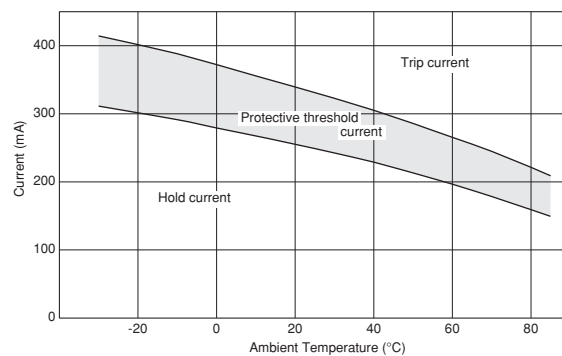


PTGL07AS3R3K3B51B0

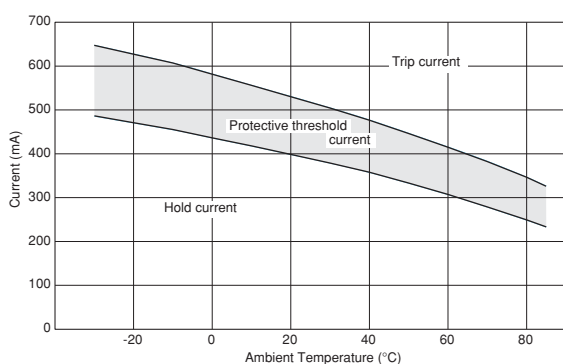

PTGL09AS2R2K3B51B0

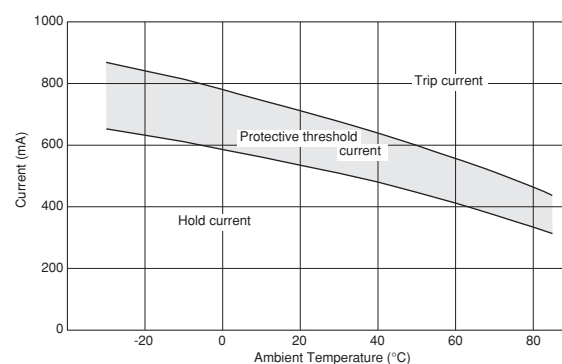


PTGL12AS1R2K3B51B0

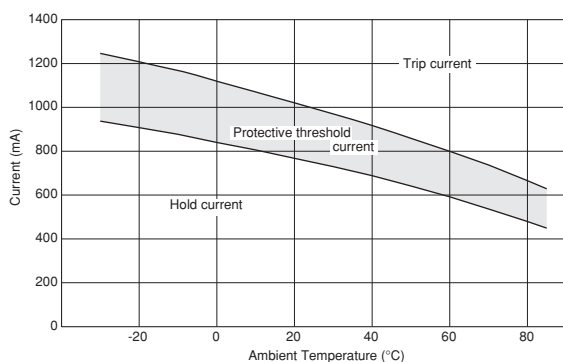


## ■ Protective Threshold Current Range (60V Series)

PTGL04AS220K4N51B0

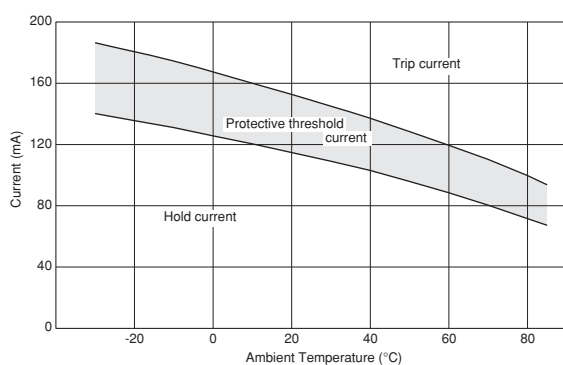

PTGL04AS220K4B51B0

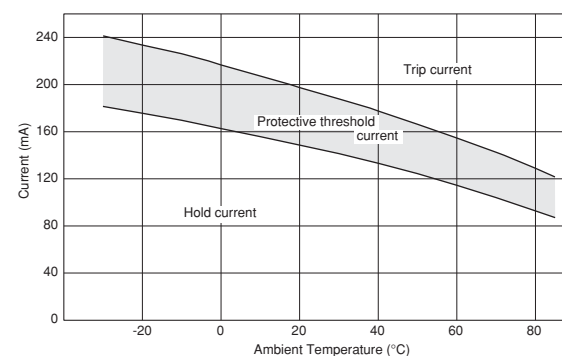


Continued on the following page. ↗


Continued from the preceding page.

## ■ Protective Threshold Current Range (60V Series)


PTGL05AS100K4B51B0

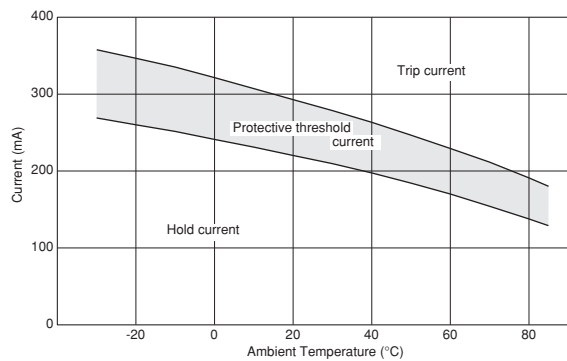


PTGL07AS5R6K4N51B0

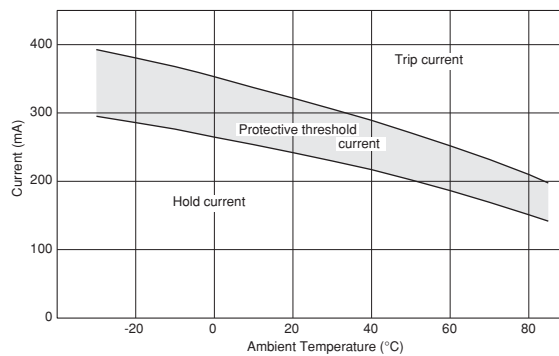


PTGL07AS5R6K4B51B0

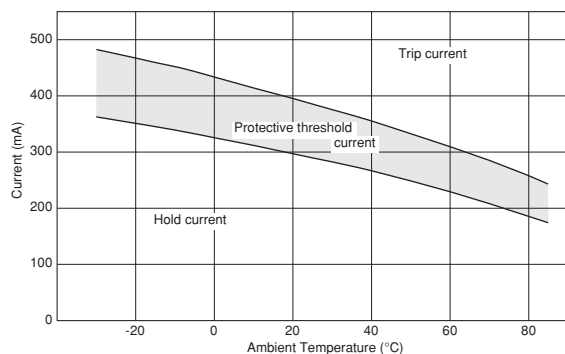

PTGL09AS3R3K4B51B0

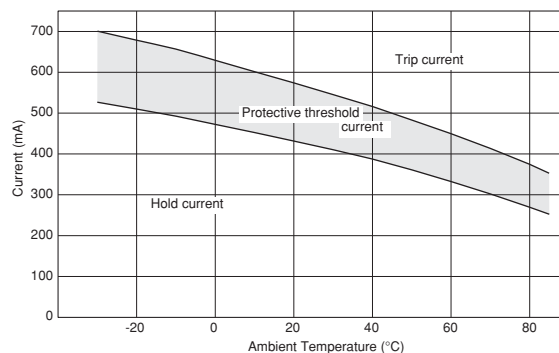


PTGL12AS2R2K4B51B0

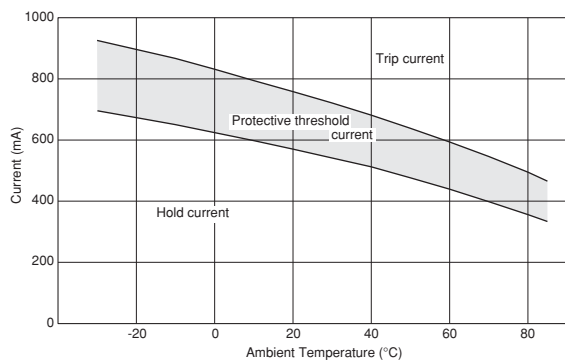


## ■ Operating Time 51V Series (Typical Curve)

PTGL04AS100K3B51B0

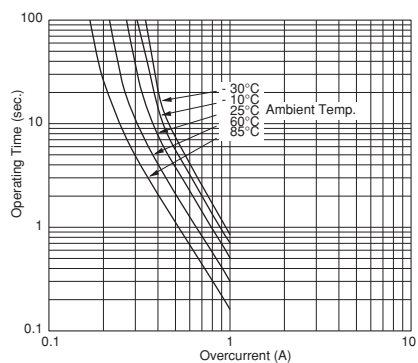

PTGL05AS6R8K3B51B0

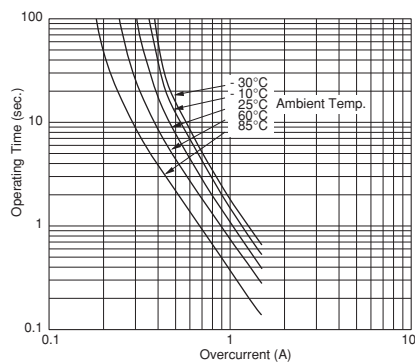


Continued on the following page. ➤


Continued from the preceding page.

## Operating Time 51V Series (Typical Curve)


PTGL07AS3R3K3B51B0

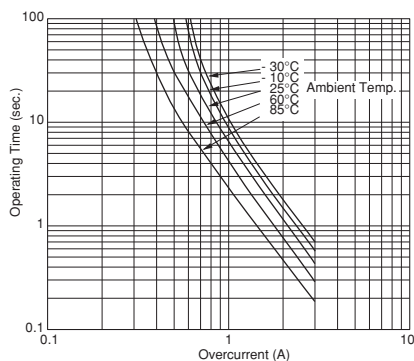

PTGL09AS2R2K3B51B0

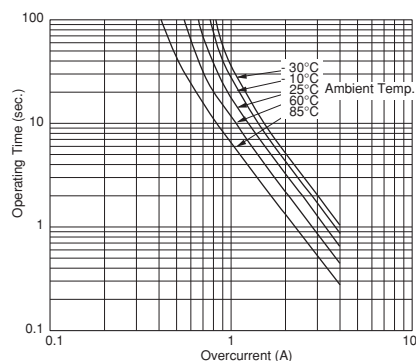


PTGL12AS1R2K3B51B0

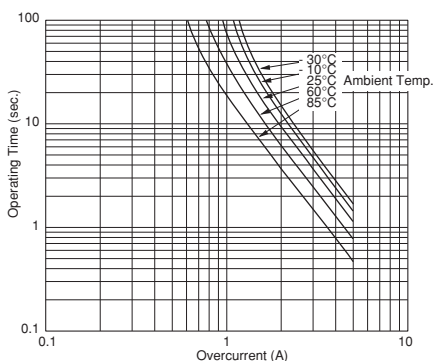


## Operating Time 60V Series (Typical Curve)


PTGL04AS220K4N51B0

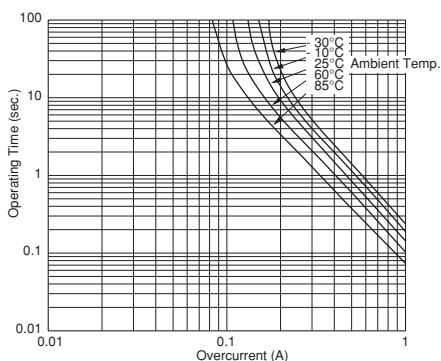


PTGL04AS220K4B51B0

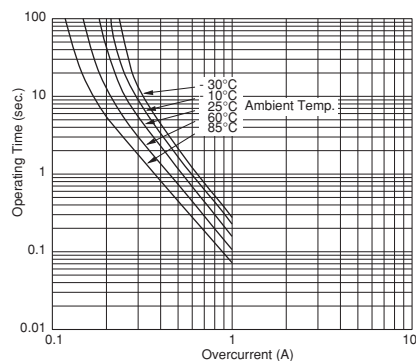

PTGL05AS100K4B51B0

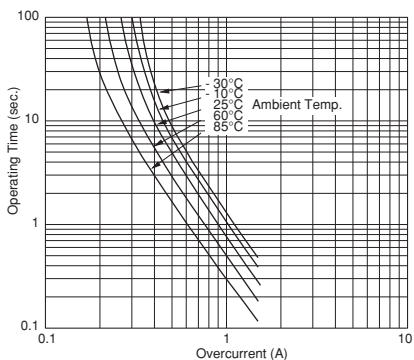

PTGL07AS5R6K4N51B0

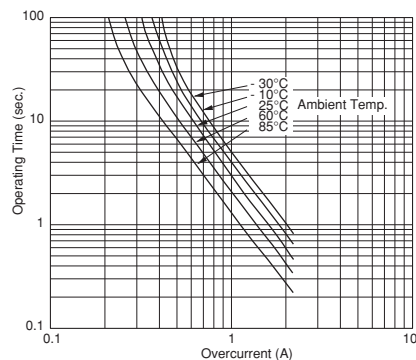


Continued on the following page. ➤


Continued from the preceding page.

## Operating Time 60V Series (Typical Curve)


PTGL07AS5R6K4B51B0

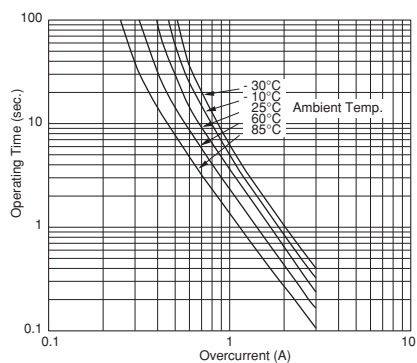

PTGL09AS3R3K4B51B0

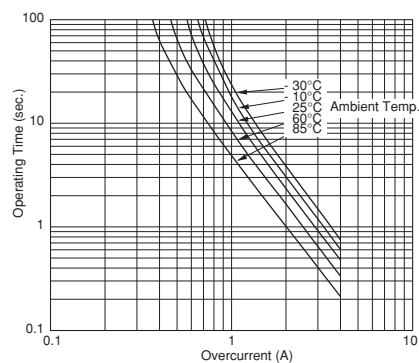

PTGL12AS2R2K4B51B0

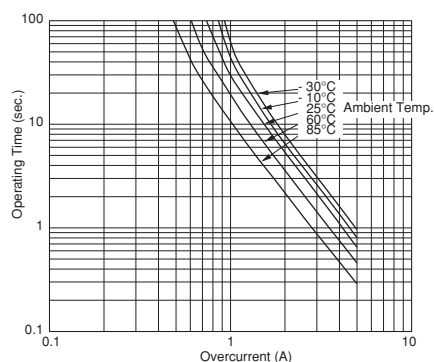

# POSISTOR® for Circuit Protection




## Overcurrent Protection Narrow Current Band 140V Series

This product is a leaded type PTC thermistor for overcurrent protection which is suitable for a current limiting resistor.

### ■ Features

1. Small fluctuation in the circuit due to resistance tolerance  $\pm 10\%$
2. Narrow current range (less than twice) between operating and non-operating current at  $-10$  to  $60$  degrees C.
3. Quick operating time due to small size compared with conventional products.
4. Best suited to meet the requirements for power supplies and motor protection. Error-free operations are assured by rush current.
5. Circuit is protected until current is turned off.
6. Restores the original low resistance value automatically once the overload is removed.
7. Non-contact design leads to long life and no noise.  
Durable and strong against mechanical vibration and shock because it is a solid element.

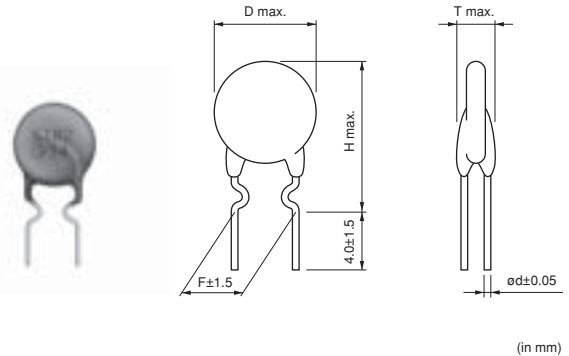

| Part Number        | Max. Voltage (V) | Hold Current (at +60°C) (mA) | Hold Current (at +25°C) (mA) | Trip Current (at +25°C) (mA) | Trip Current (at -10°C) (mA) | Max. Current (A) | Resistance (at +25°C) (ohm) | Body Diameter (D) (mm) | Thickness (T) (mm) | Height (H) (mm) | Lead Space (F) (mm) | Lead Diameter (phi d) (mm) |
|--------------------|------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------|-----------------------------|------------------------|--------------------|-----------------|---------------------|----------------------------|
| PTGL04AS560K6B51B0 | 140              | 74                           | 94                           | 125                          | 147                          | 0.5              | $56 \pm 10\%$               | 4.5                    | 4.5                | 9.5             | 5.0                 | 0.6                        |
| PTGL05AS270K6B51B0 | 140              | 106                          | 134                          | 178                          | 209                          | 1.0              | $27 \pm 10\%$               | 5.5                    | 4.5                | 10.5            | 5.0                 | 0.6                        |
| PTGL07AS150K6B51B0 | 140              | 148                          | 187                          | 249                          | 292                          | 1.5              | $15 \pm 10\%$               | 7.3                    | 4.5                | 12.3            | 5.0                 | 0.6                        |
| PTGL09AS120K6B51B0 | 140              | 192                          | 244                          | 324                          | 380                          | 2.0              | $12 \pm 10\%$               | 9.3                    | 4.5                | 14.3            | 5.0                 | 0.6                        |
| PTGL09AS7R6K6B51B0 | 140              | 227                          | 287                          | 382                          | 447                          | 2.2              | $7.6 \pm 10\%$              | 9.3                    | 4.5                | 14.3            | 5.0                 | 0.6                        |
| PTGL12AS4R7K6B51B0 | 140              | 310                          | 393                          | 523                          | 613                          | 3.5              | $4.7 \pm 10\%$              | 11.5                   | 4.5                | 16.5            | 5.0                 | 0.6                        |


Maximum Current shows typical capacities of the transformer which can be used.

140V Series is recognized by UL.


Taping type is also available. Please refer to the page of "Package" information for details.

### ■ Protective Threshold Current Range

PTGL04AS560K6B51B0

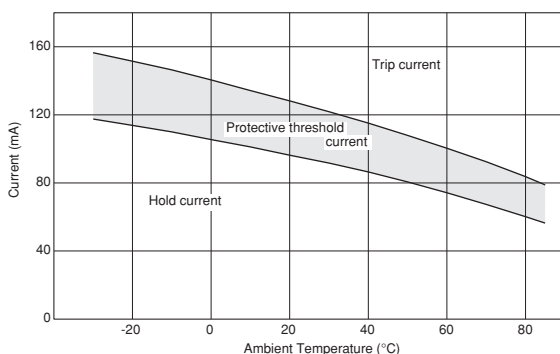

PTGL05AS270K6B51B0

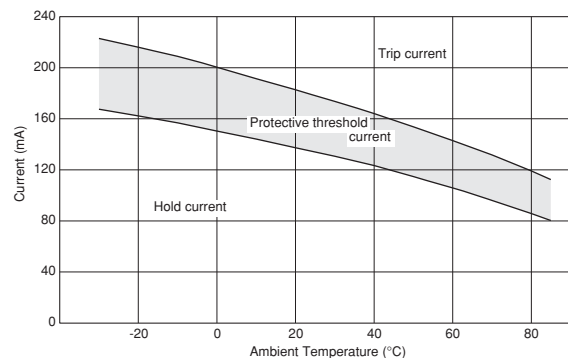


Continued on the following page. ➤


Continued from the preceding page.

## ■ Protective Threshold Current Range


PTGL07AS150K6B51B0

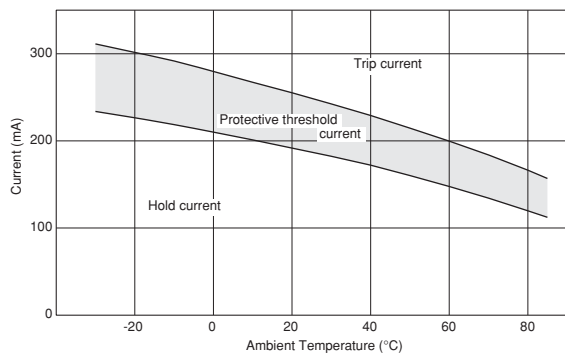


PTGL09AS120K6B51B0

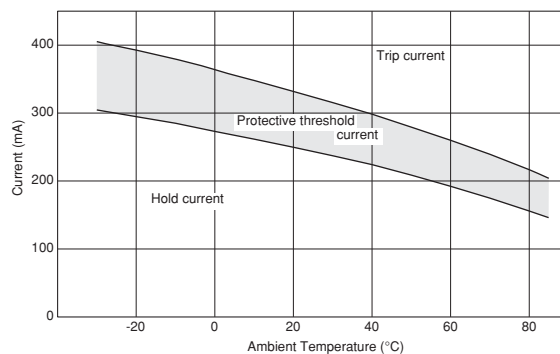

PTGL09AS7R6K6B51B0

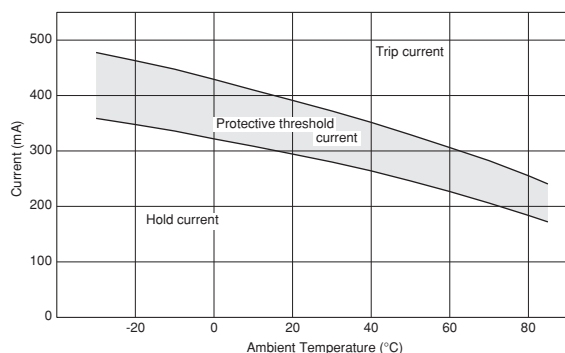


PTGL12AS4R7K6B51B0

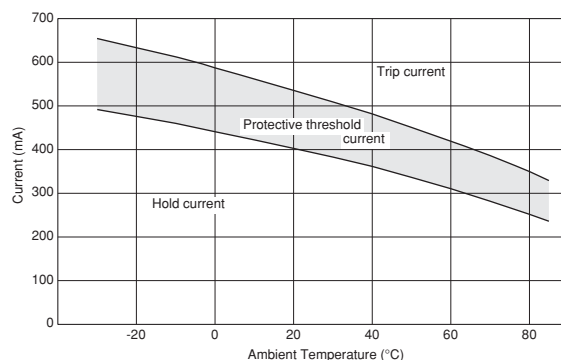


## ■ Operating Time (Typical Curve)


PTGL04AS560K6B51B0

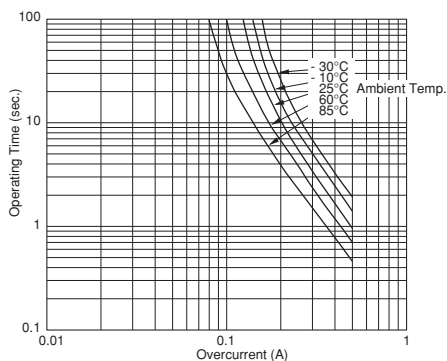


PTGL05AS270K6B51B0

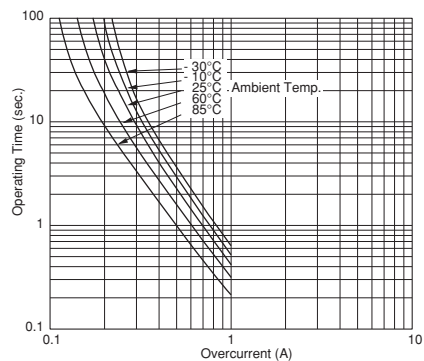

PTGL07AS150K6B51B0

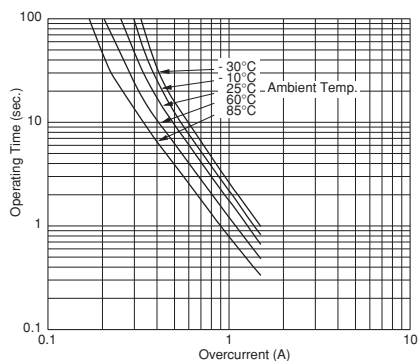

PTGL09AS120K6B51B0

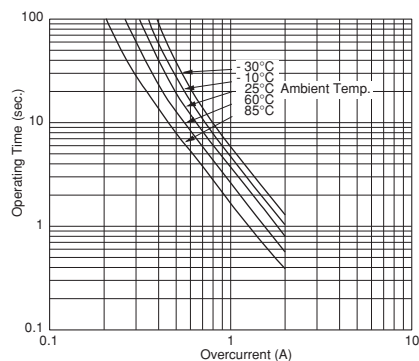


Continued on the following page. ➤


Continued from the preceding page.

## ■ Operating Time (Typical Curve)

PTGL09AS7R6K6B51B0

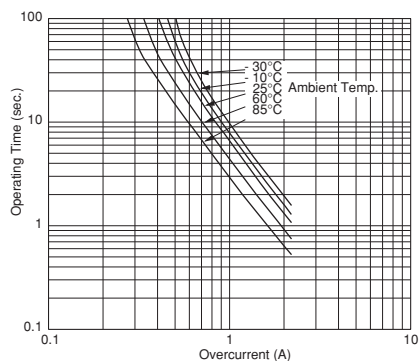

PTGL12AS4R7K6B51B0

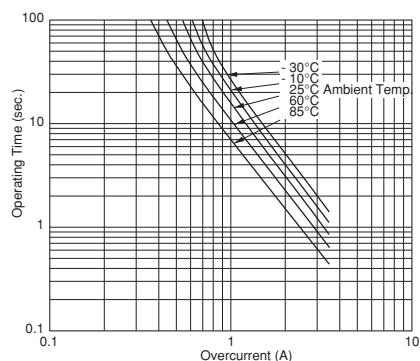

# POSISTOR® for Circuit Protection


**muRata**

## Overcurrent Protection 16V Series

This low-voltage, low-resistance type "POSISTOR" is a circuit protector whose resistance value in normal operation is very low and in abnormal situations like motor lock or short circuit, will be increased to restrain overcurrent. This "POSISTOR" is most suitable for low-voltage circuits.

### ■ Features

1. Best suited to meet the requirements for power supplies and motor protection. Error-free operation is assured by rush current.
2. Circuit is protected until current is turned off.
3. Restores the original low resistance value automatically once the overload is removed.
4. Non-contact design leads to long life and no noise.  
Durable and strong against mechanical vibration and shock because it is a solid element.

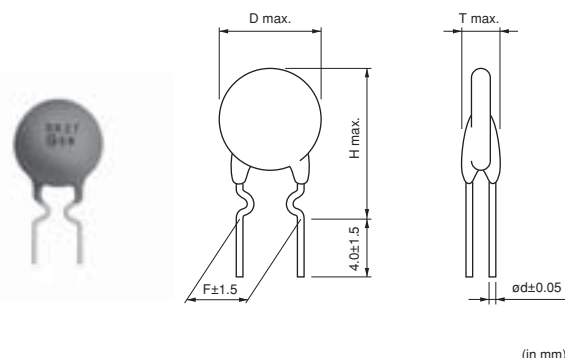


| Part Number        | Max. Voltage (V) | Hold Current (at +60°C) (mA) | Hold Current (at +25°C) (mA) | Trip Current (at +25°C) (mA) | Trip Current (at -10°C) (mA) | Max. Current (A) | Resistance (at +25°C) (ohm) | Body Diameter (D) (mm) | Thickness (T) (mm) | Height (H) (mm) | Lead Space (F) (mm) | Lead Diameter (phi d) (mm) |
|--------------------|------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------|-----------------------------|------------------------|--------------------|-----------------|---------------------|----------------------------|
| PTGL05AR1R0M1B51B0 | 16               | 370                          | 470                          | 880                          | 1040                         | 2.0              | 1.0 ±20%                    | 6.0                    | 3.5                | 9.5             | 5.0                 | 0.6                        |
| PTGL06AR0R8M1B51B0 | 16               | 400                          | 505                          | 955                          | 1120                         | 3.0              | 0.8 ±20%                    | 6.5                    | 3.5                | 10.0            | 5.0                 | 0.6                        |
| PTGL07ARR47M1B51B0 | 16               | 560                          | 705                          | 1310                         | 1570                         | 5.0              | 0.47 ±20%                   | 7.5                    | 3.5                | 12.0            | 5.0                 | 0.6                        |
| PTGL09ARR33M1B51B0 | 16               | 680                          | 875                          | 1625                         | 1900                         | 7.0              | 0.33 ±20%                   | 9.0                    | 3.5                | 14.0            | 5.0                 | 0.6                        |
| PTGL10ARR27M1B51B0 | 16               | 800                          | 1025                         | 1900                         | 2250                         | 8.0              | 0.27 ±20%                   | 10.1                   | 3.5                | 15.0            | 5.0                 | 0.6                        |
| PTGL12AR0R2M1B51B0 | 16               | 1000                         | 1300                         | 2410                         | 2800                         | 9.0              | 0.2 ±20%                    | 11.3                   | 3.5                | 16.0            | 5.0                 | 0.6                        |
| PTGL14ARR15M1B51B0 | 16               | 1200                         | 1545                         | 2855                         | 3360                         | 10               | 0.15 ±20%                   | 13.5                   | 3.5                | 18.5            | 5.0                 | 0.6                        |

Maximum Current shows typical capacities of the transformer which can be used.


Taping type is also available(except PTGL14ARR15M1B51B0). Please refer to the page of "Package" information for details.

### ■ Protective Threshold Current Range (16V Series)

PTGL05AR1R0M1B51B0

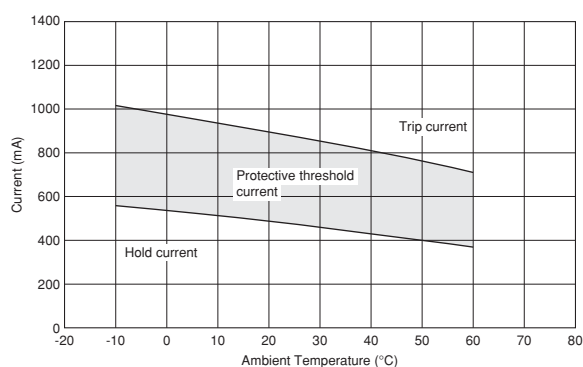

PTGL06AR0R8M1B51B0

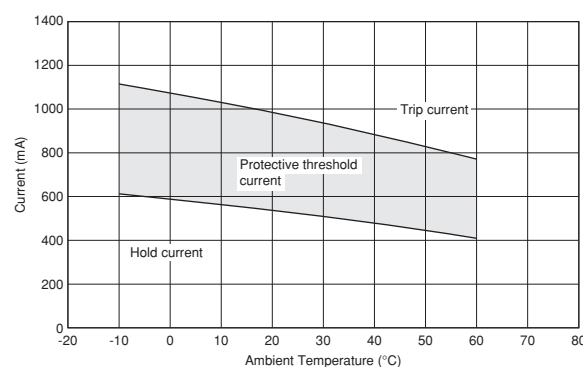


Continued on the following page.


Continued from the preceding page.

## ■ Protective Threshold Current Range (16V Series)


PTGL07ARR47M1B51B0

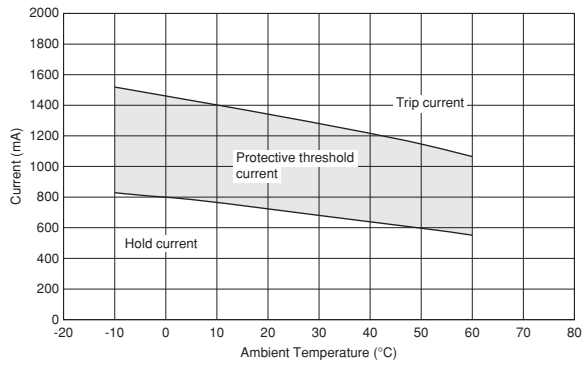


PTGL09ARR33M1B51B0

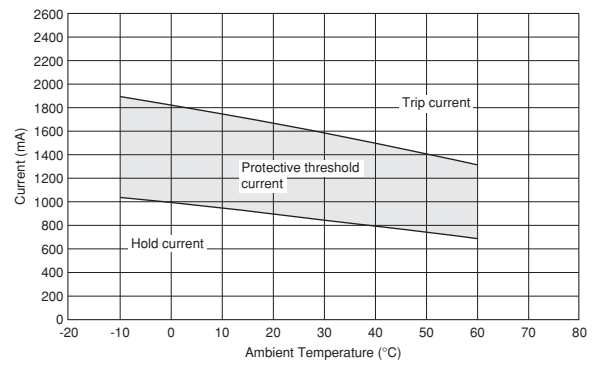


PTGL10ARR27M1B51B0

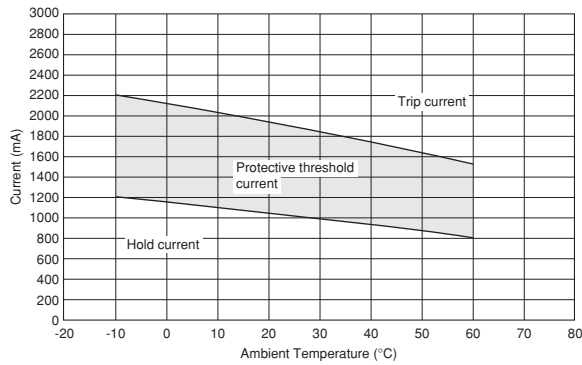

PTGL12AR0R2M1B51B0

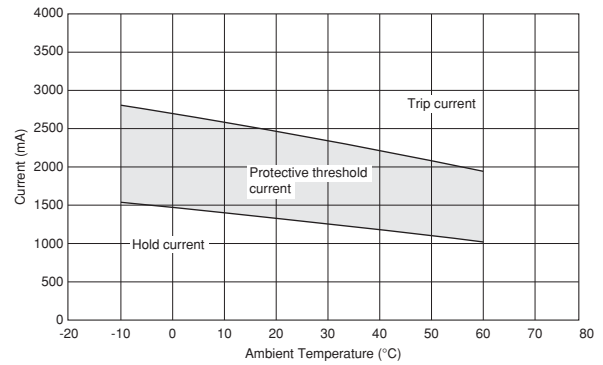


PTGL14ARR15M1B51B0

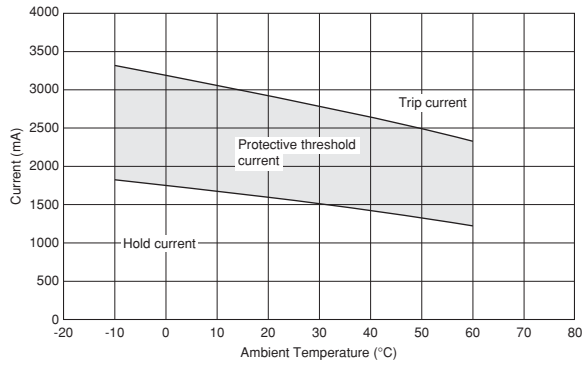


## ■ Operating Time 16V Series (Typical Curve)

PTGL05AR1R0M1B51B0

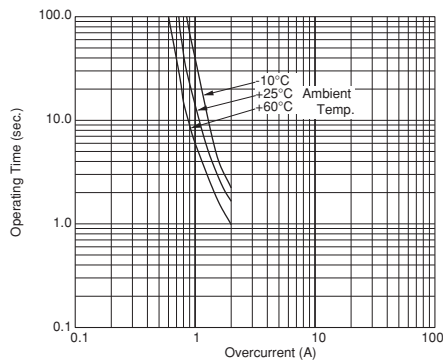

PTGL06AR0R8M1B51B0

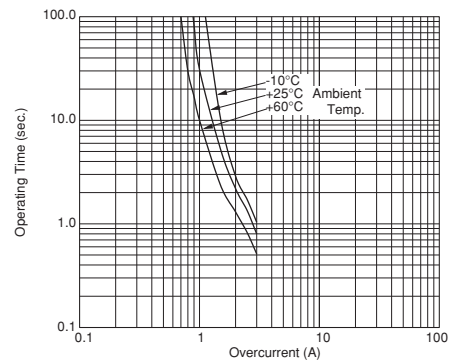


Continued on the following page. ➤


Continued from the preceding page.

## Operating Time 16V Series (Typical Curve)


PTGL07ARR47M1B51B0

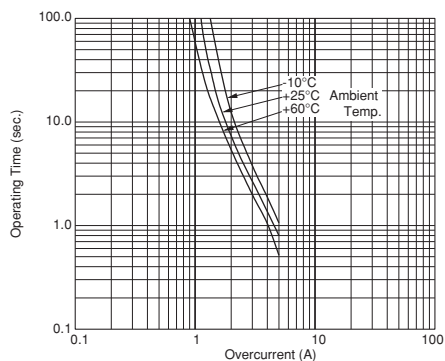


PTGL09ARR33M1B51B0

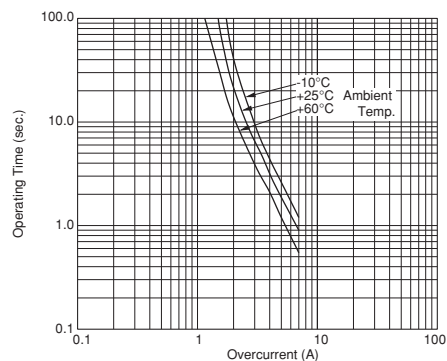


PTGL10ARR27M1B51B0

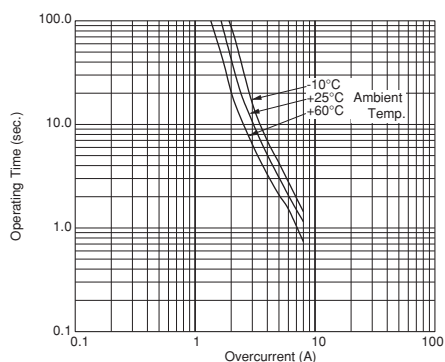

PTGL12AR0R2M1B51B0

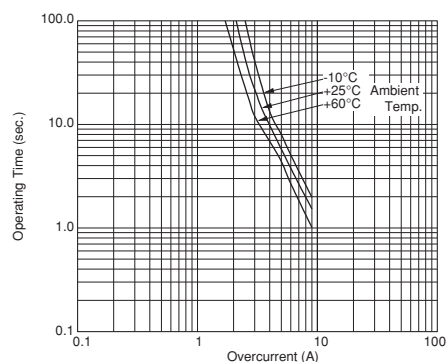

PTGL14ARR15M1B51B0

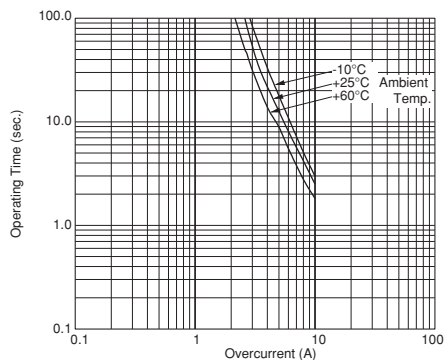

# POSISTOR® for Circuit Protection




## Overcurrent Protection 24/30/32V Series

The safety resistor "POSISTOR" is most suited to meet the requirements of the safety standard short-circuit tests such as IEC, VDE, BS, UL, CSA, etc., worldwide.

### ■ Features

1. Best suited to meet the requirements of the short-circuit test. Quick response compared with current fuse and resistor and error-free operation are assured.
2. Small size save board space. Capable of being mounted anywhere because replacement is not required.
3. Actuates by excessive current during the short-circuit test to restrain abnormal heat generation in other circuit components and printed boards. This state will be maintained until the abnormal state is removed or power is turned off to reset the "POSISTOR" to the original state. Surface temperature of "POSISTOR" is kept low, below a certain value, during the actuation.
4. Non-contact design leads to long life and no noise. Durable and strong against mechanical vibration and shock because it is a solid element.

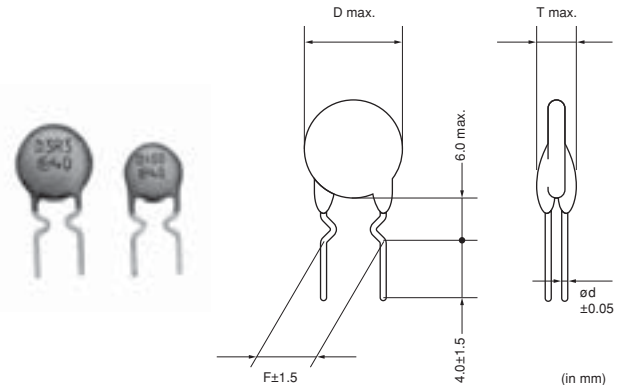

| Part Number        | Max. Voltage (V) | Hold Current (at +60°C) (mA) | Hold Current (at +25°C) (mA) | Trip Current (at +25°C) (mA) | Trip Current (at -10°C) (mA) | Max. Current (A) | Resistance (at +25°C) (ohm) | Body Diameter (D) (mm) | Thickness (T) (mm) | Lead Space (F) (mm) | Lead Diameter (phi d) (mm) |
|--------------------|------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------|-----------------------------|------------------------|--------------------|---------------------|----------------------------|
| PTGL07BD100N2B51B0 | 24               | 80                           | 124                          | 251                          | 320                          | 2.0              | 10 ±30%                     | 7.4                    | 4.0                | 5.0                 | 0.6                        |
| PTGL07BD6R8N2B51B0 | 24               | 90                           | 139                          | 296                          | 370                          | 2.0              | 6.8 ±30%                    | 7.4                    | 4.0                | 5.0                 | 0.6                        |
| PTGL09BD4R7N2B51B0 | 24               | 120                          | 216                          | 398                          | 500                          | 2.0              | 4.7 ±30%                    | 9.5                    | 4.0                | 5.0                 | 0.6                        |
| PTGL09BD3R3N2B51B0 | 24               | 140                          | 248                          | 461                          | 580                          | 2.0              | 3.3 ±30%                    | 9.5                    | 4.0                | 5.0                 | 0.6                        |
| PTGL09BD2R2N2B51B0 | 24               | 180                          | 326                          | 431                          | 710                          | 2.0              | 2.2 ±30%                    | 9.5                    | 4.0                | 5.0                 | 0.6                        |
| PTGL04AR130H2B51B0 | 30               | 145                          | 180                          | 350                          | 400                          | 0.7              | 13 ±25%                     | 5.5                    | 4.0                | 5.0                 | 0.6                        |
| PTGL07AR4R6H2B51B0 | 30               | 250                          | 340                          | 610                          | 700                          | 2.0              | 4.6 ±25%                    | 7.4                    | 4.0                | 5.0                 | 0.6                        |
| PTGL09AR1R8H2B51B0 | 30               | 410                          | 510                          | 970                          | 1120                         | 3.0              | 1.8 ±25%                    | 9.5                    | 4.0                | 5.0                 | 0.6                        |
| PTGL12AR1R2H2B51B0 | 30               | 520                          | 645                          | 1225                         | 1420                         | 4.3              | 1.2 ±25%                    | 12.0                   | 4.0                | 5.0                 | 0.6                        |
| PTGL13AR0R8H2B71B0 | 30               | 680                          | 870                          | 1600                         | 1900                         | 5.5              | 0.8 ±25%                    | 13.5                   | 4.0                | 7.5                 | 0.6                        |
| PTGL07BD470N3B51B0 | 32               | 30                           | 55                           | 115                          | 140                          | 1.5              | 47 ±30%                     | 7.4                    | 4.0                | 5.0                 | 0.6                        |
| PTGL07BD330N3B51B0 | 32               | 40                           | 60                           | 135                          | 170                          | 1.5              | 33 ±30%                     | 7.4                    | 4.0                | 5.0                 | 0.6                        |
| PTGL07BD220N3B51B0 | 32               | 45                           | 75                           | 160                          | 200                          | 1.5              | 22 ±30%                     | 7.4                    | 4.0                | 5.0                 | 0.6                        |
| PTGL07BD150N3B51B0 | 32               | 60                           | 100                          | 195                          | 240                          | 1.5              | 15 ±30%                     | 7.4                    | 4.0                | 5.0                 | 0.6                        |


Maximum Current shows typical capacities of the transformer which can be used.

24/30/32V Series are recognized by UL (except PTGL13AR0R8H2B71B0).


Only PTGL\_51B0 series are available in taping type (except PTGL12AR1R2H2B51B0). Please refer to the page of "Package" information for details.

## ■ Protective Threshold Current Range (24V Series)


PTGL07BD100N2B51B0

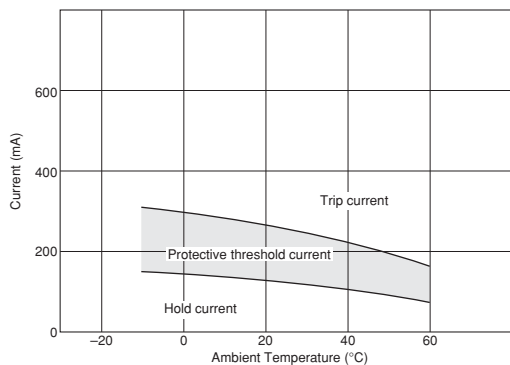


PTGL07BD6R8N2B51B0

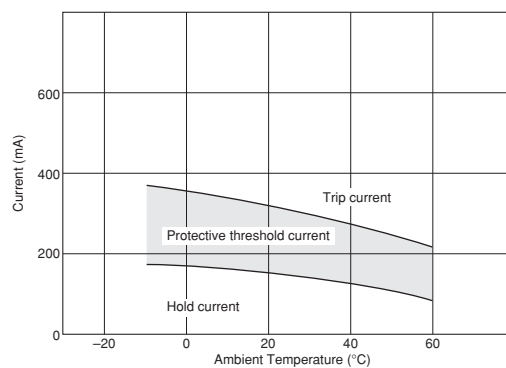


PTGL09BD4R7N2B51B0

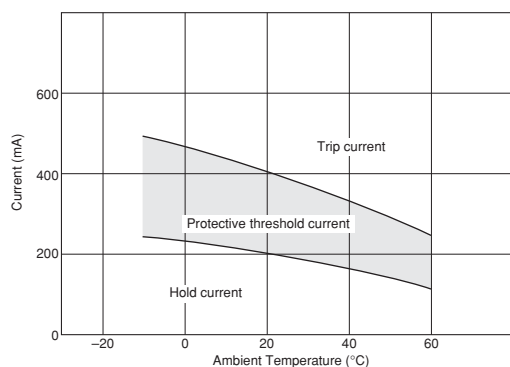

PTGL09BD3R3N2B51B0

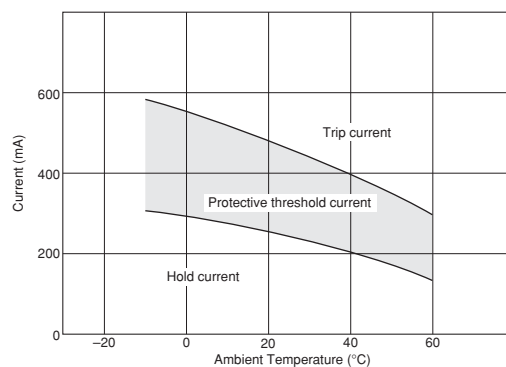


PTGL09BD2R2N2B51B0

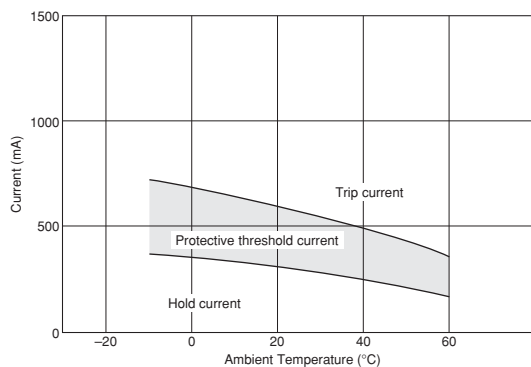


## ■ Protective Threshold Current Range (30V Series)

PTGL04AR130H2B51B0

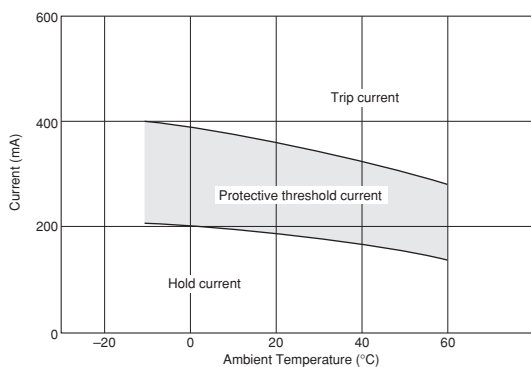

PTGL07AR4R6H2B51B0

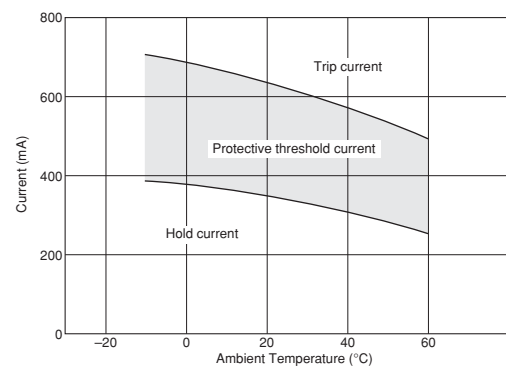


Continued on the following page. ↗


Continued from the preceding page.

## ■ Protective Threshold Current Range (30V Series)


PTGL09AR1R8H2B51B0

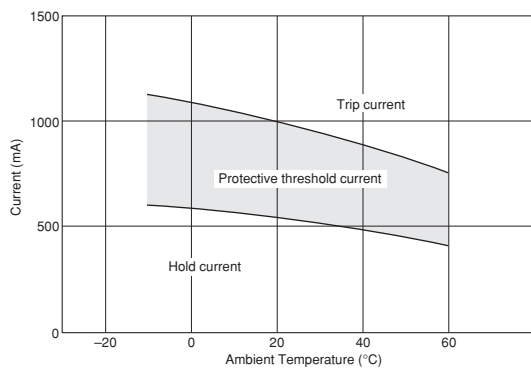

PTGL12AR1R2H2B51B0

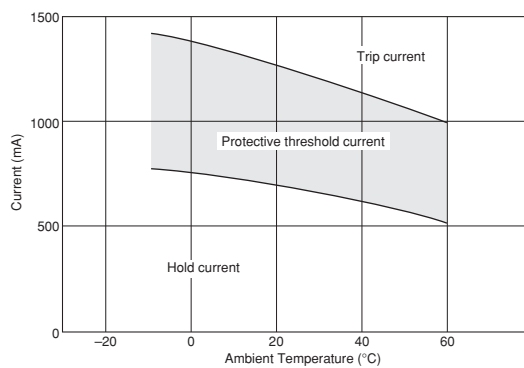


PTGL13AR0R8H2B71B0

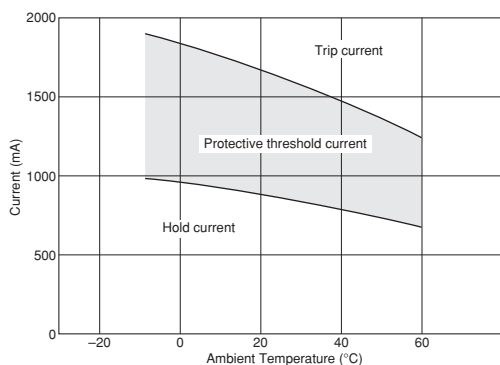


## ■ Protective Threshold Current Range (32V Series)


PTGL07BD470N3B51B0

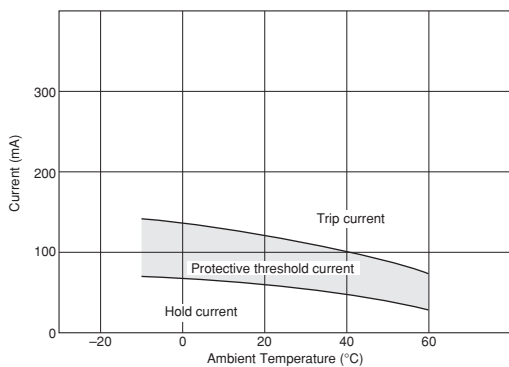


PTGL07BD330N3B51B0

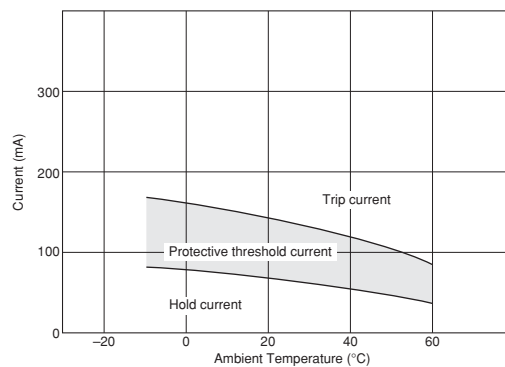

PTGL07BD220N3B51B0

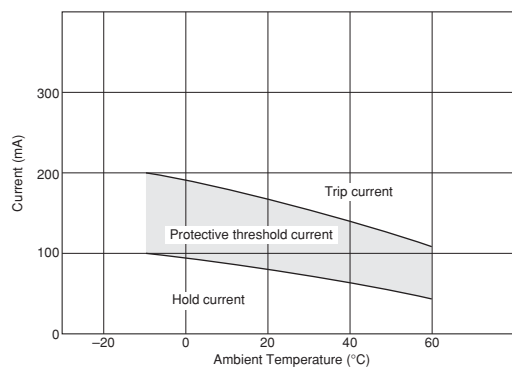


PTGL07BD150N3B51B0

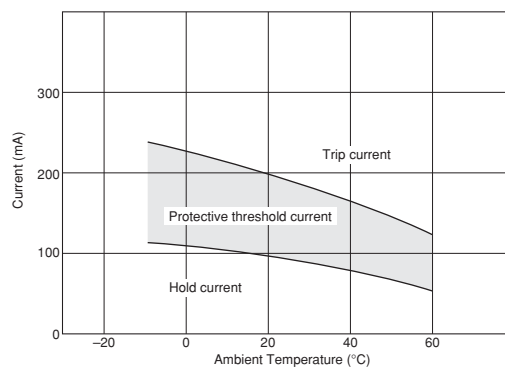


## ■ Operating Time 24V Series (Typical Curve)


PTGL07BD100N2B51B0

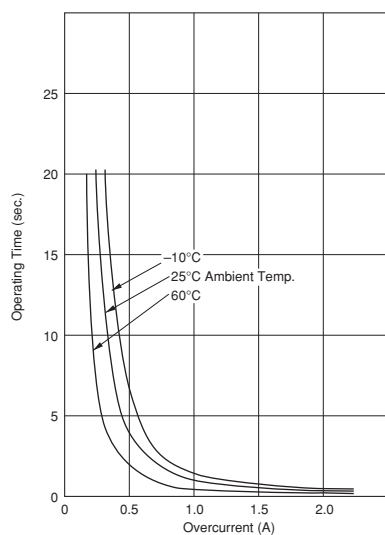


PTGL07BD6R8N2B51B0

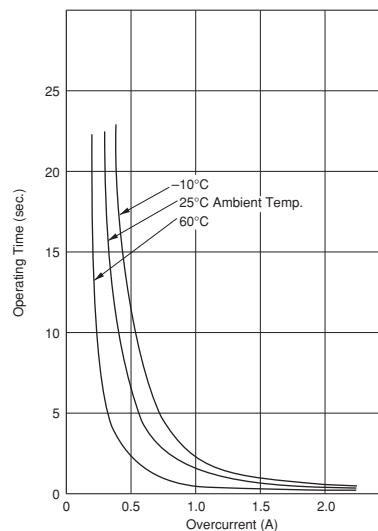


PTGL09BD4R7N2B51B0

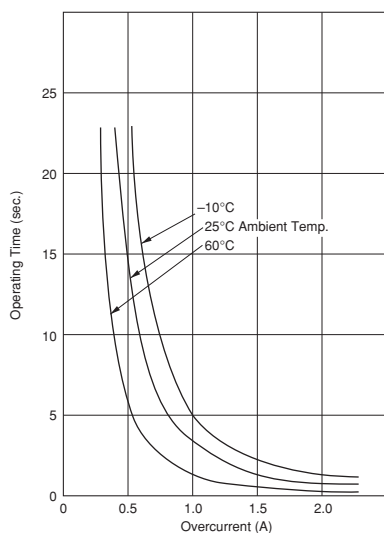

PTGL09BD3R3N2B51B0

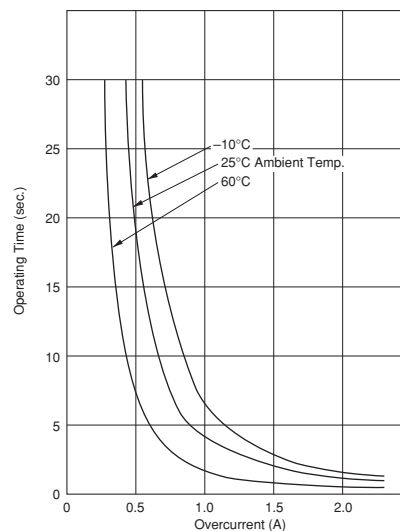


PTGL09BD2R2N2B51B0

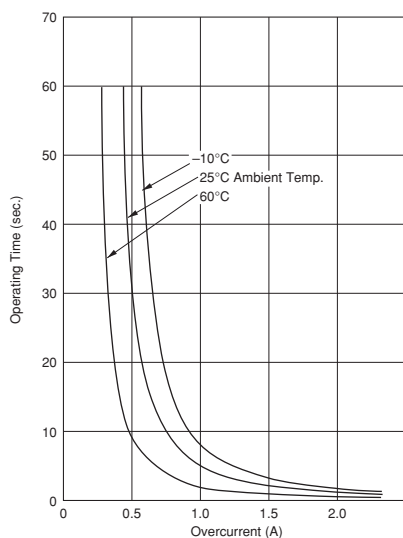


## ■ Operating Time 30V Series (Typical Curve)


PTGL04AR130H2B51B0

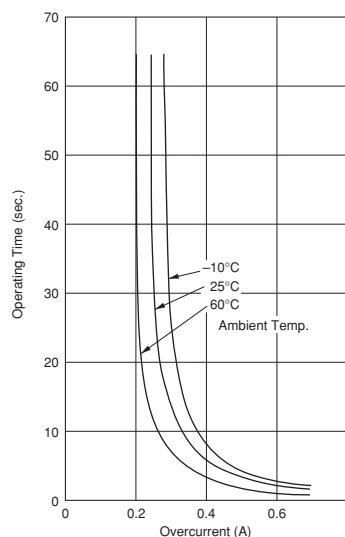


PTGL07AR4R6H2B51B0

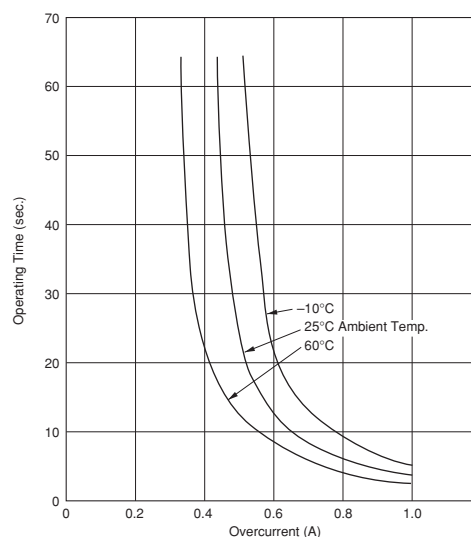


PTGL09AR1R8H2B51B0

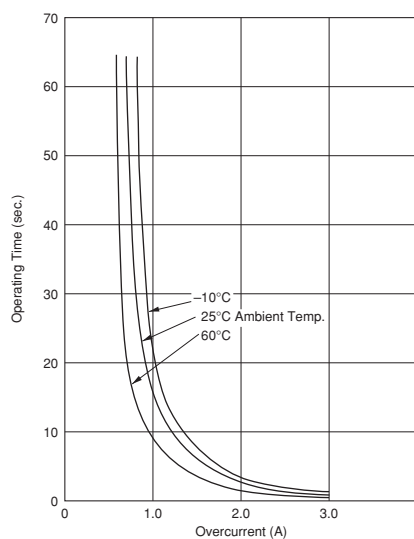

PTGL12AR1R2H2B51B0

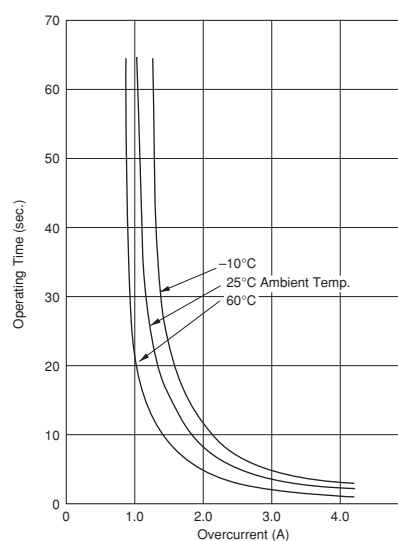


PTGL13AR0R8H2B71B0

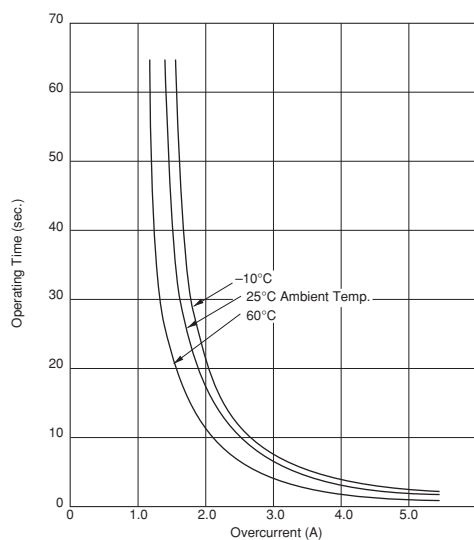


## ■ Operating Time 32V Series (Typical Curve)


PTGL07BD470N3B51B0

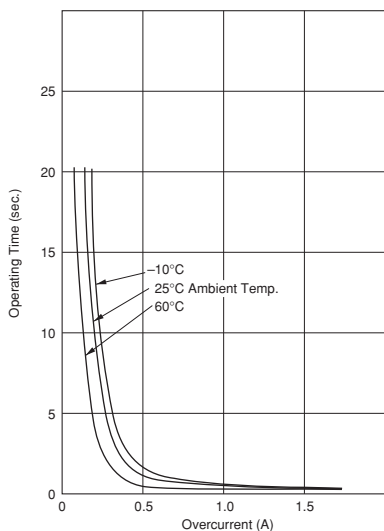


PTGL07BD330N3B51B0

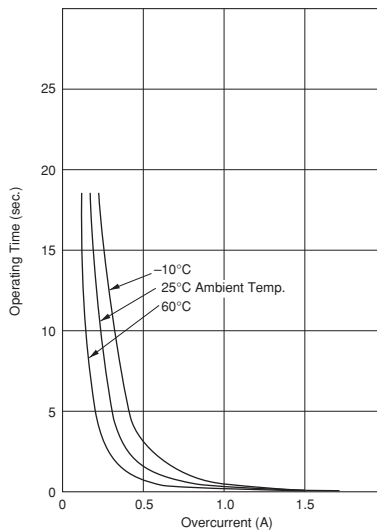

PTGL07BD220N3B51B0

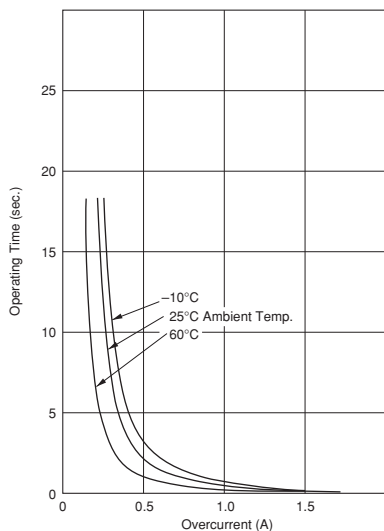


PTGL07BD150N3B51B0

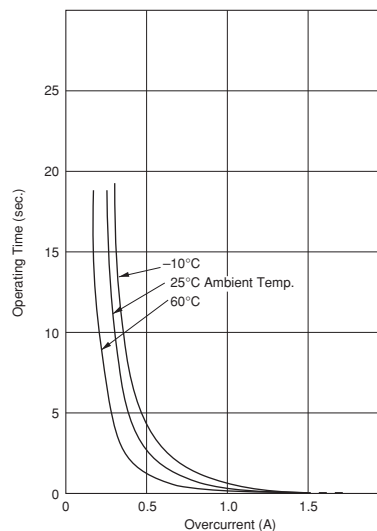


## ■ Application Circuit

(1) Short - Circuit Test of Transistor

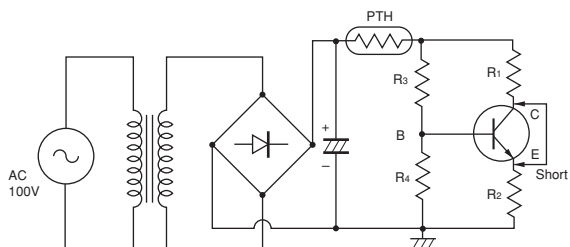

(2) Short - Circuit Test of Diode

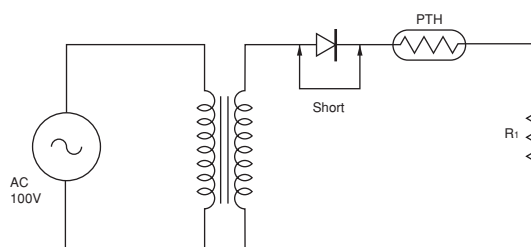


Continued on the following page. ↗


Continued from the preceding page.

## Application Circuit


(3) Short - Circuit Test of IC

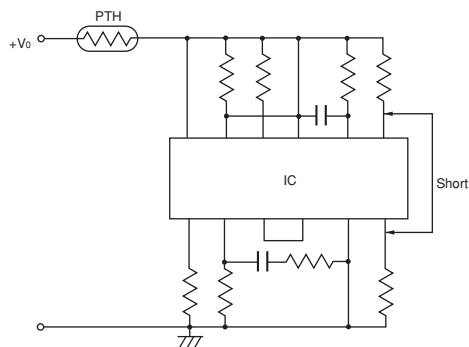


(4) Short - Circuit Test of Electrolytic Capacitor

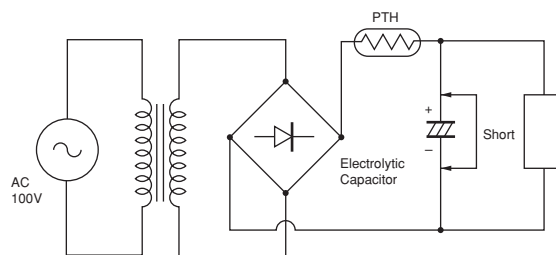


(5) Lock Test of Motor

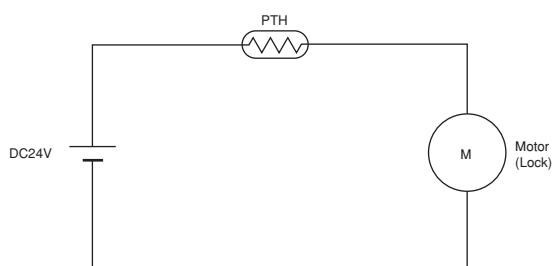

(6) Transistor Protection Circuit

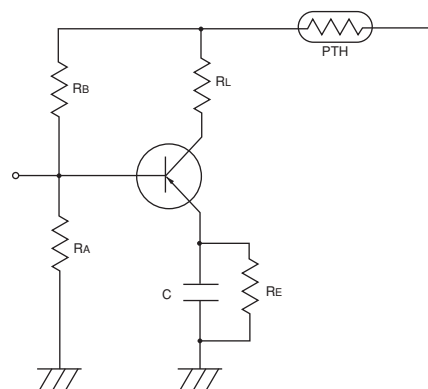

(7) Transformer Protection Circuit

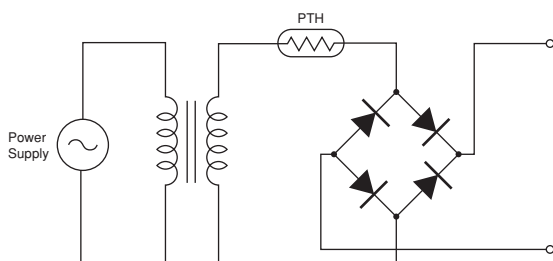

# POSISTOR® for Circuit Protection




## Overcurrent Protection 56/80V Series

"POSISTOR" is a circuit protector whose resistance value in normal operation is very low and in abnormal situations like overcurrent or overheating, will be increased to restrain overcurrent. "POSISTOR" can be used for overcurrent protection against current fuse or temperature fuse, due to its ability to return to its initial condition when overcurrent is removed.

### ■ Features

1. Best suited to meet the requirements for power supplies and motor protection. Error-free operations are assured by rush current.
2. Circuit is protected until current is turned off.
3. Restores the original low resistance value automatically once the overload is removed.
4. Non-contact design leads to long life and no noise. Durable and strong against mechanical vibration and shock because it is a solid element.

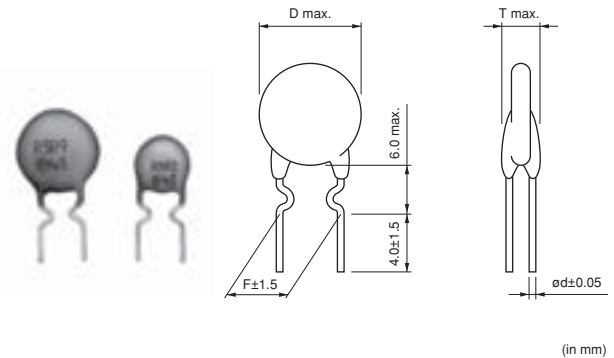

### ■ Applications

1. DC cooling fan motors in office equipment, e.g., computers, facsimiles, floppy disk drives and power units.
2. DC drive motors in VTRs and cassette tape recorders. Power transformers (at secondary winding)



| Part Number        | Max. Voltage (V) | Hold Current (at +60°C) (mA) | Hold Current (at +25°C) (mA) | Trip Current (at +25°C) (mA) | Trip Current (at -10°C) (mA) | Max. Current (A) | Resistance (at +25°C) (ohm) | Body Diameter (D) (mm) | Thickness (T) (mm) | Lead Space (F) (mm) | Lead Diameter (phi d) (mm) |
|--------------------|------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------|-----------------------------|------------------------|--------------------|---------------------|----------------------------|
| PTGL07AR220M3P51B0 | 56               | 90                           | 115                          | 205                          | 240                          | 1.0              | 22 ±20%                     | 7.4                    | 4.0                | 5.0                 | 0.6                        |
| PTGL07AR8R2M3P51B0 | 56               | 130                          | 165                          | 300                          | 350                          | 1.0              | 8.2 ±20%                    | 7.4                    | 4.0                | 5.0                 | 0.6                        |
| PTGL09AR150M3B51B0 | 56               | 150                          | 190                          | 340                          | 400                          | 1.2              | 15 ±20%                     | 9.5                    | 4.0                | 5.0                 | 0.6                        |
| PTGL10AR3R9M3P51B0 | 56               | 210                          | 260                          | 470                          | 550                          | 2.0              | 3.9 ±20%                    | 10.5                   | 4.0                | 5.0                 | 0.6                        |
| PTGL09AR4R7M3B51B0 | 56               | 270                          | 350                          | 600                          | 700                          | 2.0              | 4.7 ±20%                    | 9.5                    | 4.0                | 5.0                 | 0.6                        |
| PTGL10AR3R9M3B51B0 | 56               | 300                          | 390                          | 680                          | 800                          | 2.0              | 3.9 ±20%                    | 10.5                   | 4.0                | 5.0                 | 0.6                        |
| PTGL14AR3R3M3B71B0 | 56               | 380                          | 490                          | 830                          | 980                          | 2.5              | 3.3 ±20%                    | 14.5                   | 4.0                | 7.5                 | 0.6                        |
| PTGL05AR550H4P51B0 | 80               | 50                           | 62                           | 115                          | 135                          | 0.7              | 55 ±25%                     | 5.5                    | 4.5                | 5.0                 | 0.6                        |
| PTGL07AR250H4B51B0 | 80               | 110                          | 140                          | 260                          | 300                          | 1.0              | 25 ±25%                     | 7.4                    | 4.5                | 5.0                 | 0.6                        |
| PTGL09AR9R4H4B51B0 | 80               | 190                          | 240                          | 450                          | 530                          | 3.0              | 9.4 ±25%                    | 9.5                    | 4.5                | 5.0                 | 0.6                        |

Maximum Current shows typical capacities of the transformer which can be used.

Please contact us for UL recognized products.

Only PTGL\_51B0 type is available in taping type. Please refer to the page of "Package" information for details.

### ■ Protective Threshold Current Range (56V Series)

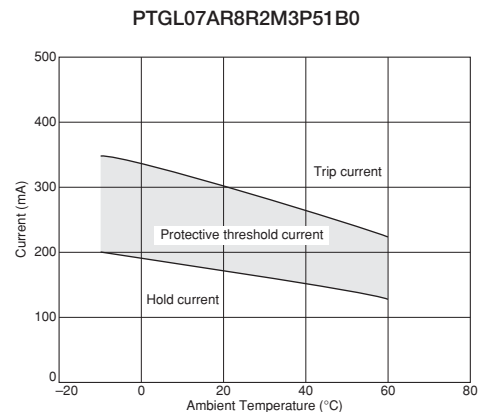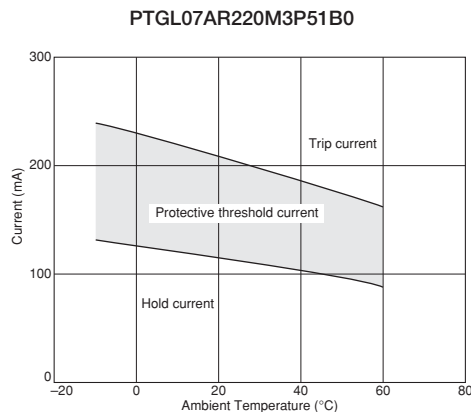


Continued on the following page. ➤


Continued from the preceding page.

## ■ Protective Threshold Current Range (56V Series)


PTGL09AR150M3B51B0

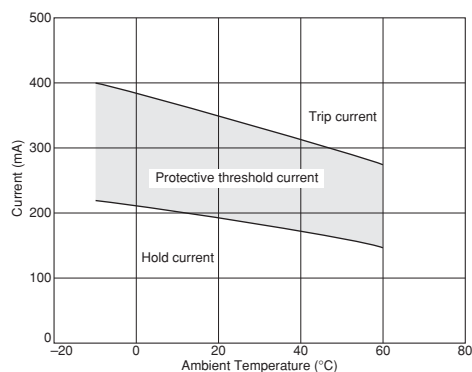


PTGL10AR3R9M3P51B0

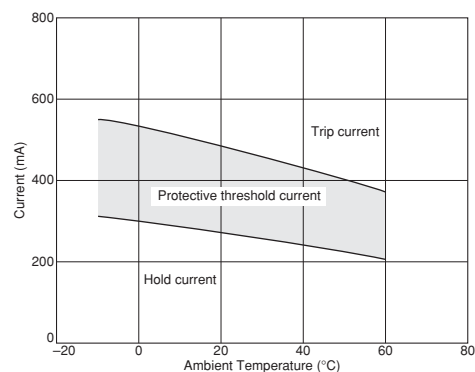


PTGL09AR4R7M3B51B0

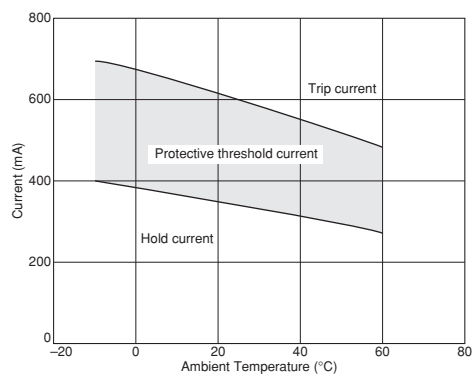

PTGL10AR3R9M3B51B0

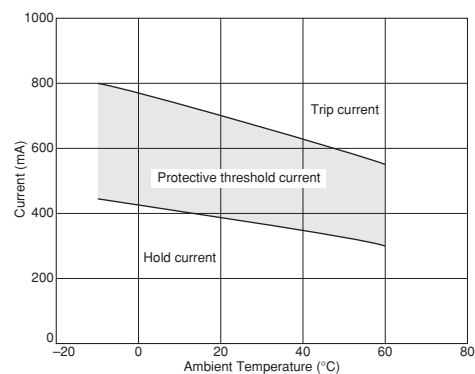


PTGL14AR3R3M3B71B0

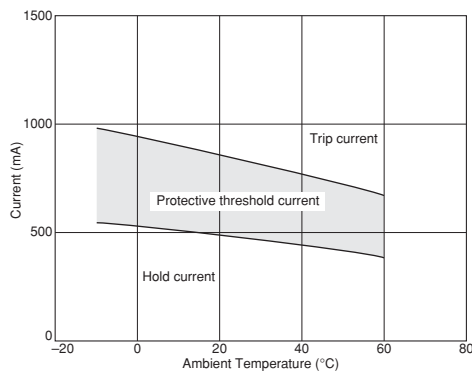


## ■ Protective Threshold Current Range (80V Series)

PTGL05AR550H4P51B0

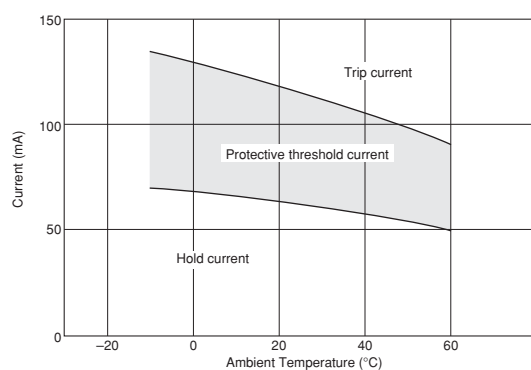

PTGL07AR250H4B51B0

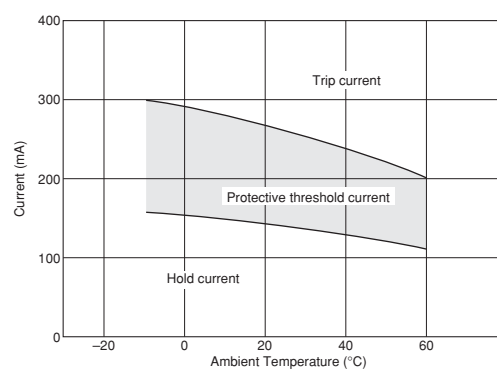


Continued on the following page. ➤

Continued from the preceding page.


## ■ Protective Threshold Current Range (80V Series)

PTGL09AR9R4H4B51B0

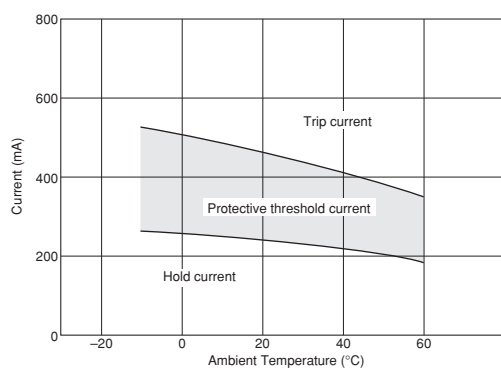


## ■ Operating Time 56V Series (Typical Curve)


PTGL07AR220M3P51B0

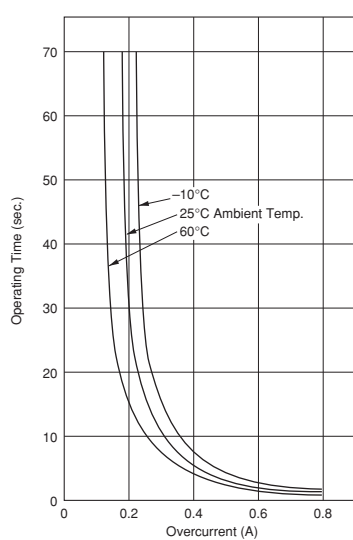


PTGL07AR8R2M3P51B0

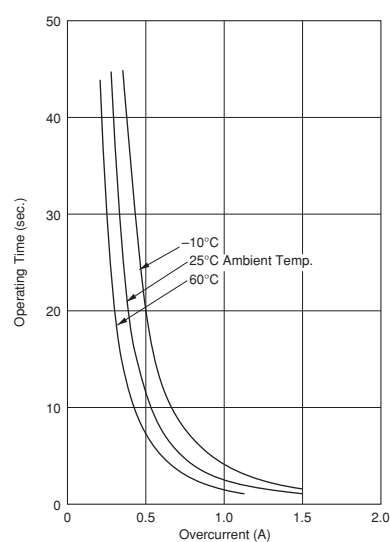

PTGL09AR150M3B51B0

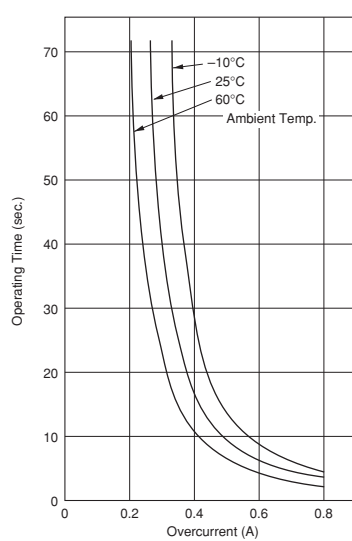

PTGL10AR3R9M3P51B0

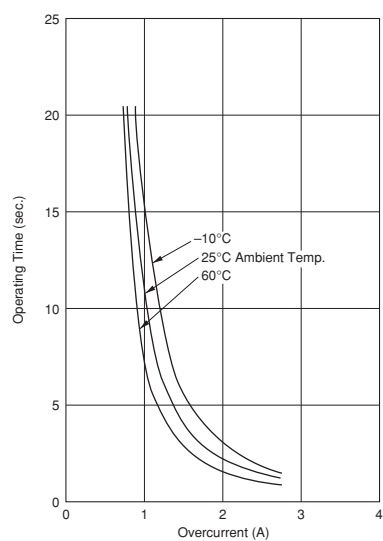


Continued on the following page. ↗


Continued from the preceding page.

## Operating Time 56V Series (Typical Curve)


PTGL09AR4R7M3B51B0

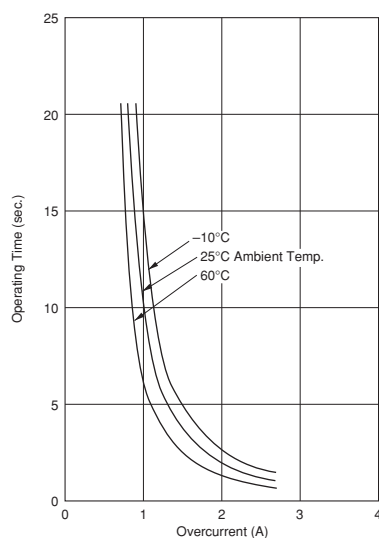

PTGL10AR3R9M3B51B0

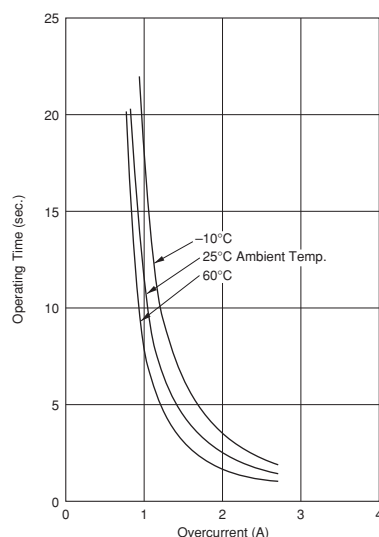


PTGL14AR3R3M3B71B0

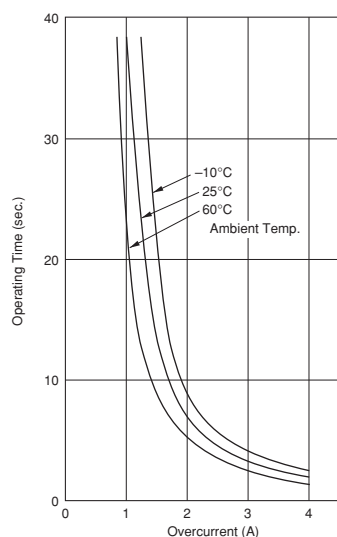


## Operating Time 80V Series (Typical Curve)

PTGL05AR550H4P51B0

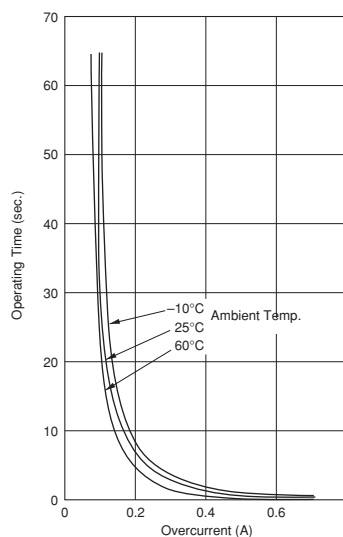

PTGL07AR250H4B51B0

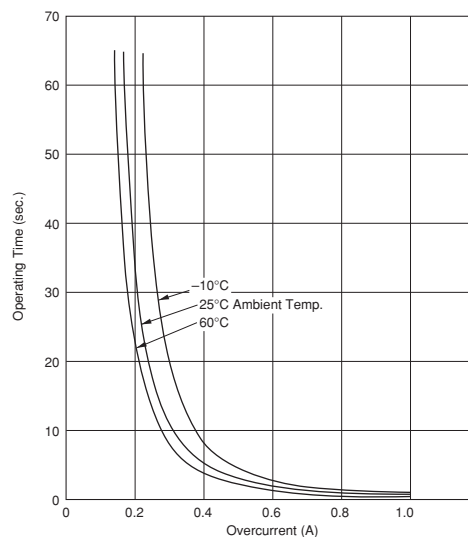


Continued on the following page. ↗

Continued from the preceding page.


## Operating Time 80V Series (Typical Curve)

PTGL09AR9R4H4B51B0

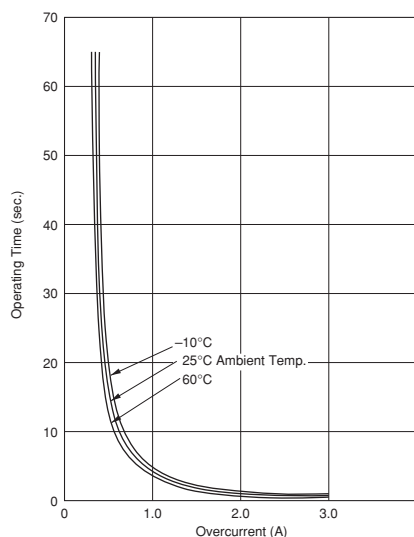


## Application Circuit


(1) DC Motor Protection Circuit

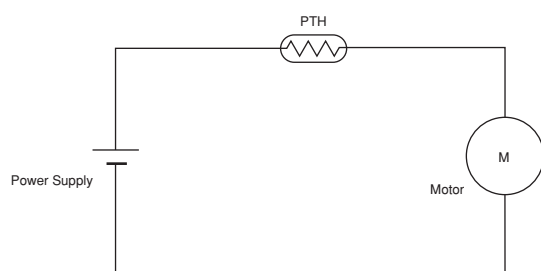

(2) Transistor Protection Circuit

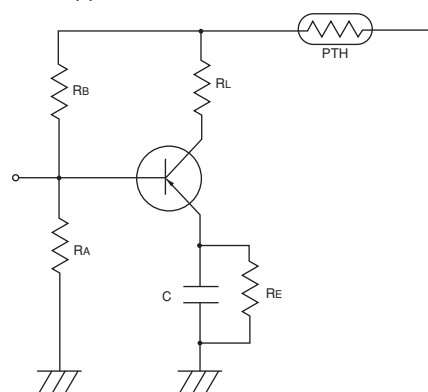

(3) Transformer Protection Circuit

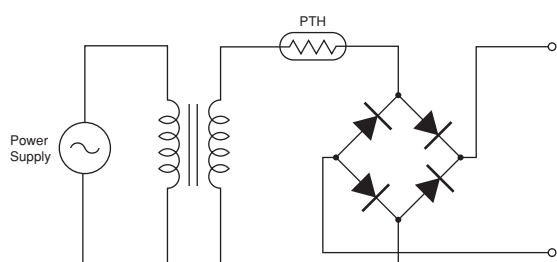

# POSISTOR® for Circuit Protection

**muRata**

## Overcurrent Protection 125/140V Series

"POSISTOR" is a circuit protector whose resistance value in normal operation is very low and in abnormal situations like overcurrent or overheating, will be increased to restrain overcurrent. "POSISTOR" can be used for overcurrent protection against current fuse or temperature fuse, due to its ability to return to its initial condition when overcurrent is removed.


### ■ Features

1. Best suited to meet the requirements for power supplies and motor protection. Error-free operations are assured by rush current.
2. Circuit is protected until current is turned off.
3. Restores the original low resistance value automatically once the overload is removed.
4. Non-contact design leads to long life and no noise. Durable and strong against mechanical vibration and shock because it is a solid element.

### ■ Applications

Circuit Protection :

1. Transformers
2. Transistors
3. Fluorescent Lamps

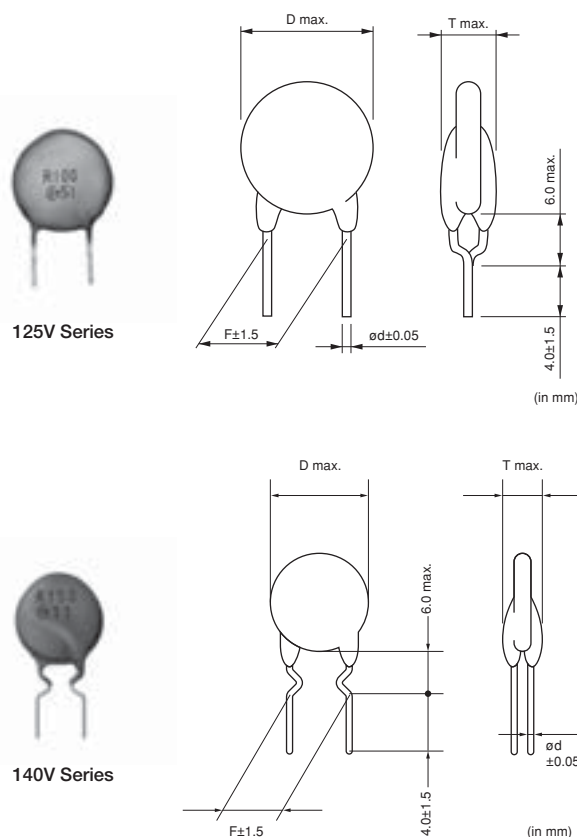

| Part Number        | Max. Voltage (V) | Hold Current (at +60°C) (mA) | Hold Current (at +25°C) (mA) | Trip Current (at +25°C) (mA) | Trip Current (at -10°C) (mA) | Max. Current (A) | Resistance (at +25°C) (ohm) | Body Diameter (D) (mm) | Thickness (T) (mm) | Lead Space (F) (mm) | Lead Diameter (phi d) (mm) |
|--------------------|------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------|-----------------------------|------------------------|--------------------|---------------------|----------------------------|
| PTGL05AR181M7P52B0 | 125              | 30                           | 38                           | 64                           | 75                           | 0.3              | 180 ±20%                    | 6.0                    | 5.0                | 5.0                 | 0.6                        |
| PTGL09AR220M6B52B0 | 125              | 135                          | 175                          | 290                          | 340                          | 0.8              | 22 ±20%                     | 10.0                   | 5.5                | 5.0                 | 0.6                        |
| PTGL14AR100M6B72B0 | 125              | 220                          | 280                          | 475                          | 550                          | 1.2              | 10 ±20%                     | 15.0                   | 5.5                | 7.5                 | 0.6                        |
| PTGL07AR330M6A51B0 | 140              | 100                          | 130                          | 200                          | 230                          | 0.5              | 33 ±20%                     | 7.4                    | 6.0                | 5.0                 | 0.5                        |
| PTGL09AR220M6C61B0 | 140              | 140                          | 180                          | 280                          | 330                          | 1.0              | 22 ±20%                     | 9.6                    | 6.0                | 6.5                 | 0.65                       |
| PTGL10AR150M6C61B0 | 140              | 170                          | 220                          | 345                          | 400                          | 1.0              | 15 ±20%                     | 11.6                   | 6.0                | 6.5                 | 0.65                       |
| PTGL12AR100M6C01B0 | 140              | 220                          | 290                          | 440                          | 510                          | 1.0              | 10 ±20%                     | 13.0                   | 6.0                | 10.0                | 0.65                       |
| PTGL13AR6R8M6C01B0 | 140              | 290                          | 370                          | 575                          | 670                          | 1.0              | 6.8 ±20%                    | 14.0                   | 6.0                | 10.0                | 0.65                       |
| PTGL16AR5R6M6C01B0 | 140              | 340                          | 440                          | 670                          | 780                          | 2.0              | 5.6 ±20%                    | 17.0                   | 6.0                | 10.0                | 0.65                       |


Maximum Current shows typical capacities of the transformer which can be used.

Please contact us for UL recognized products.


Only PTGL\_52B0 type is available in taping type. Please refer to the page of "Package" information for details.

## ■ Protective Threshold Current Range (125V Series)


PTGL05AR181M7P52B0

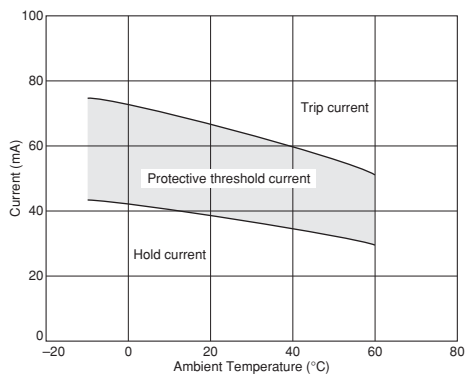

PTGL09AR220M6B52B0

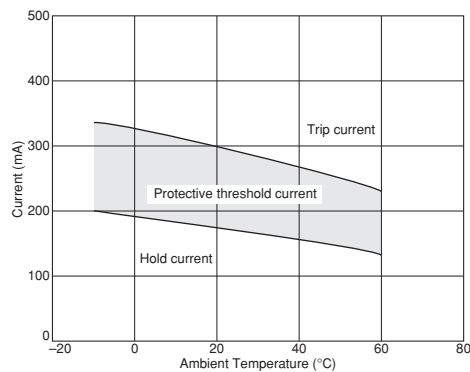


PTGL14AR100M6B72B0

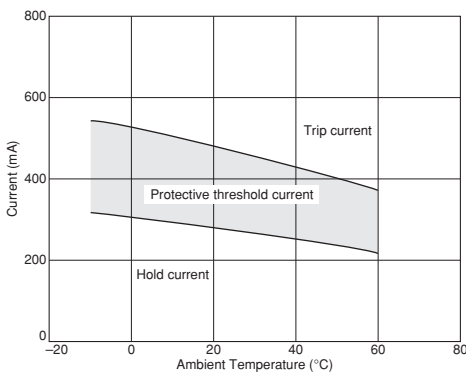


8

## ■ Protective Threshold Current Range (140V Series)


PTGL07AR330M6A51B0

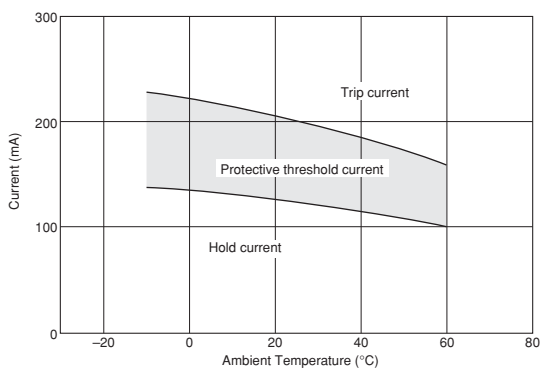


PTGL09AR220M6C61B0

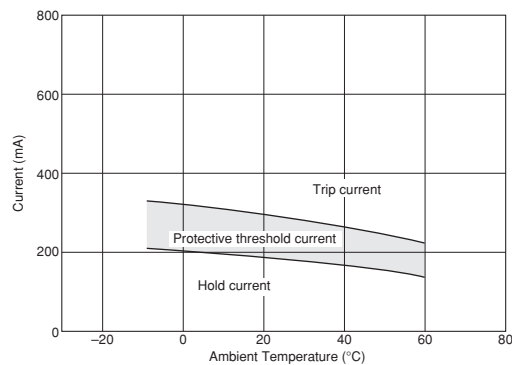

PTGL10AR150M6C61B0

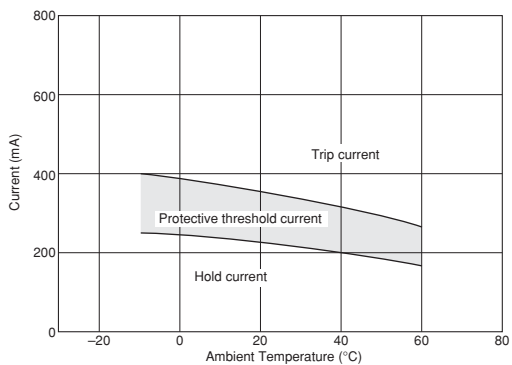

PTGL12AR100M6C01B0

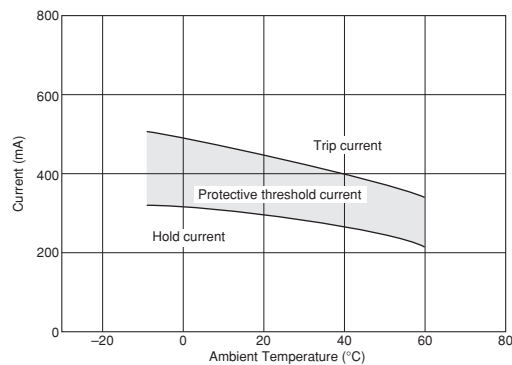


Continued on the following page. ↗


Continued from the preceding page.

## ■ Protective Threshold Current Range (140V Series)

PTGL13AR6R8M6C01B0

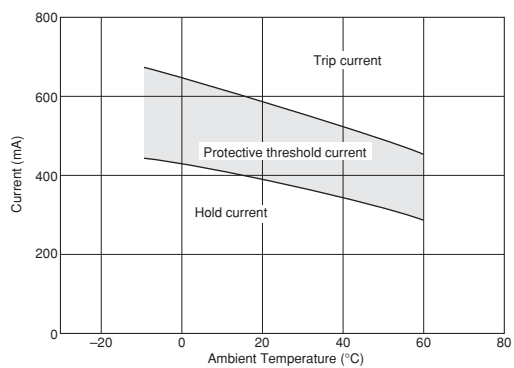


PTGL16AR5R6M6C01B0

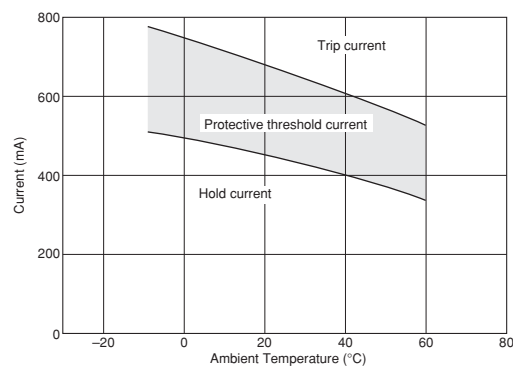


## ■ Operating Time 125V Series (Typical Curve)


PTGL05AR181M7P52B0

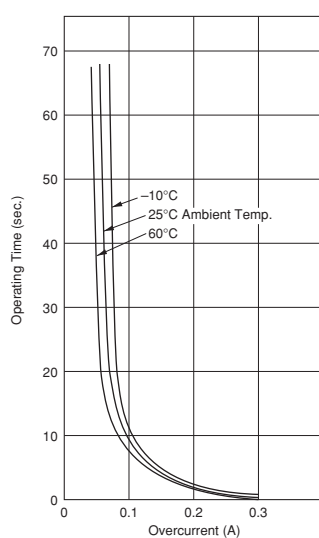

PTGL09AR220M6B52B0

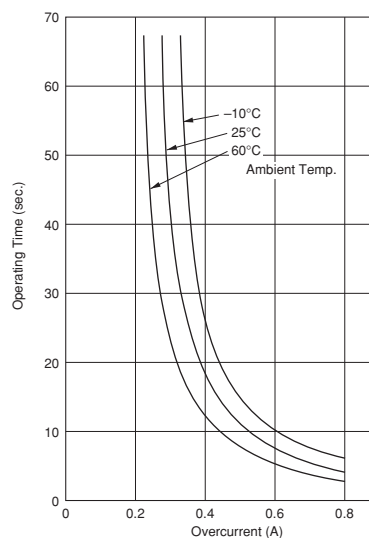


PTGL14AR100M6B72B0

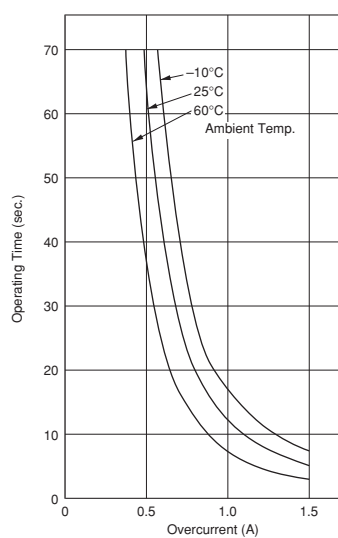


## ■ Operating Time 140V Series (Typical Curve)


PTGL07AR330M6A51B0

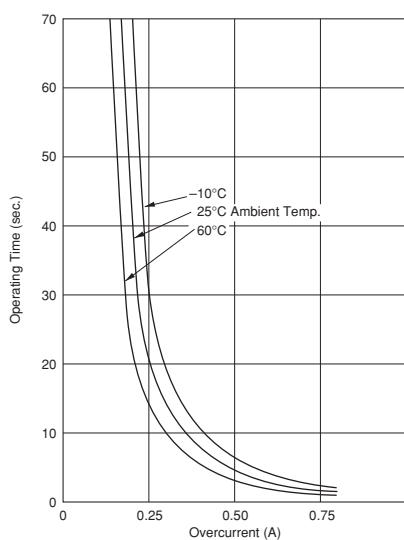


PTGL09AR220M6C61B0

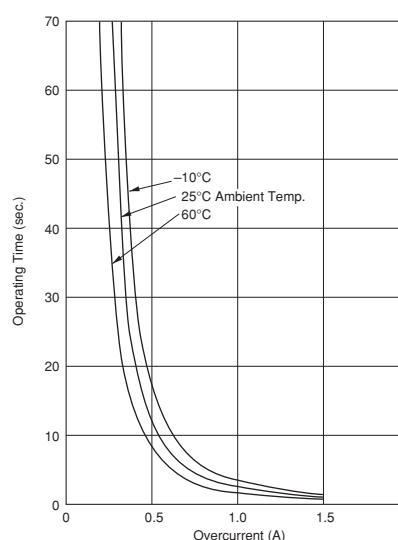


PTGL10AR150M6C61B0

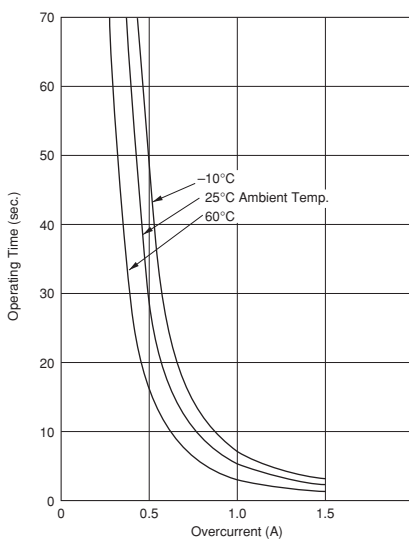


PTGL12AR100M6C01B0

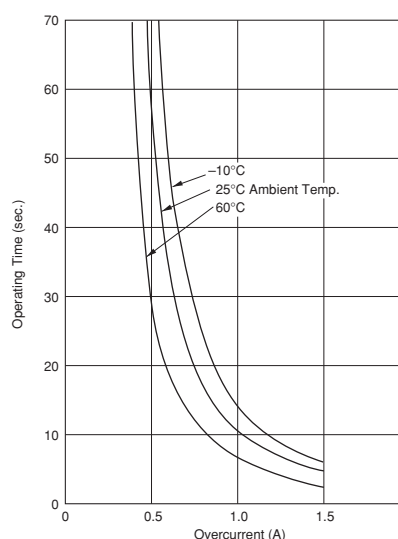

PTGL13AR6R8M6C01B0

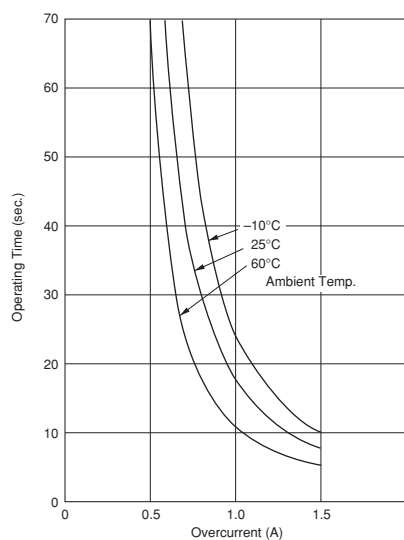


PTGL16AR5R6M6C01B0

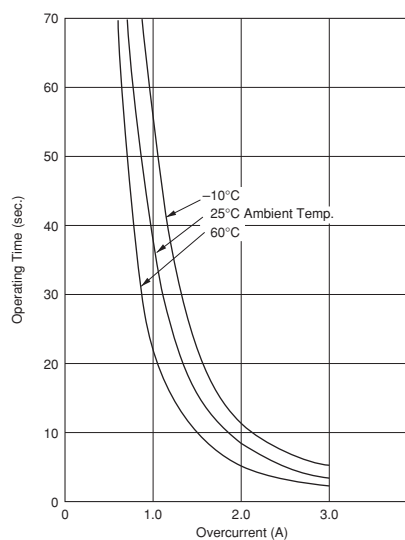


## ■ Application Circuit


(1) Transformer Protection Circuit 1)

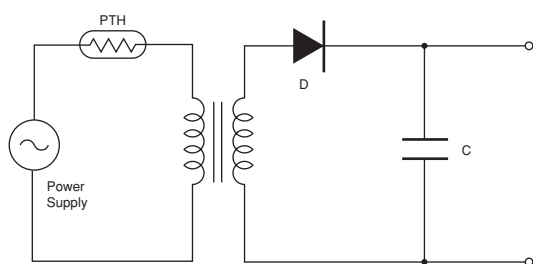


(2) Transformer Protection Circuit 2)

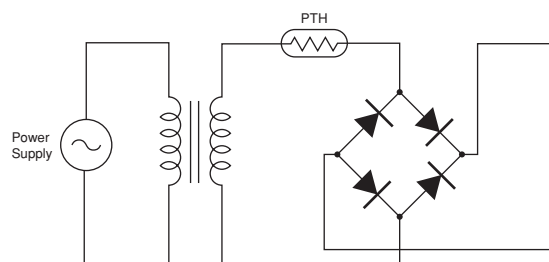

(3) Transistor Protection Circuit

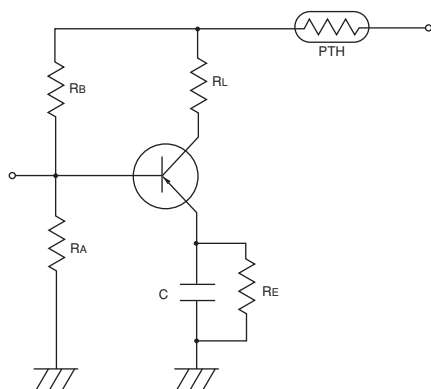

(4) Fluorescent Lamp Protection Circuit

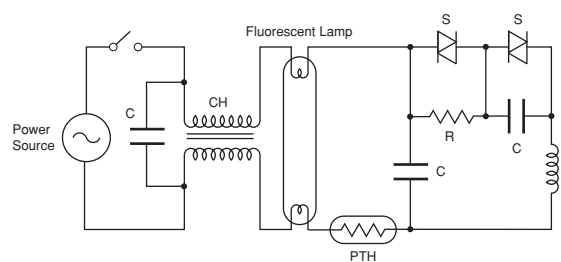

# POSISTOR® for Circuit Protection




**muRata**

## Overcurrent Protection 250/265V Series

"POSISTOR" is a circuit protector whose resistance value in normal operation is very low and in abnormal situations like overcurrent or overheating, will be increased to restrain overcurrent. "POSISTOR" can be used for overcurrent protection against current fuse or temperature fuse, due to its ability to return to its initial condition when overcurrent is removed.

### ■ Features

1. Best suited to meet the requirements for power supplies and motor protection. Error-free operations are assured by rush current.
2. Circuit is protected until current is turned off.
3. Restores the original low resistance value automatically once the overload is removed.
4. Non-contact design leads to long life and no noise. Durable and strong against mechanical vibration and shock because it is a solid element.

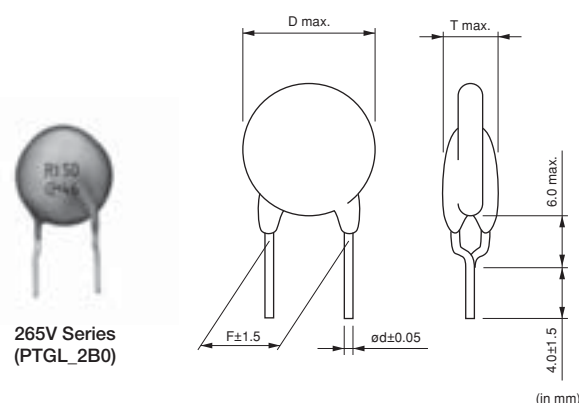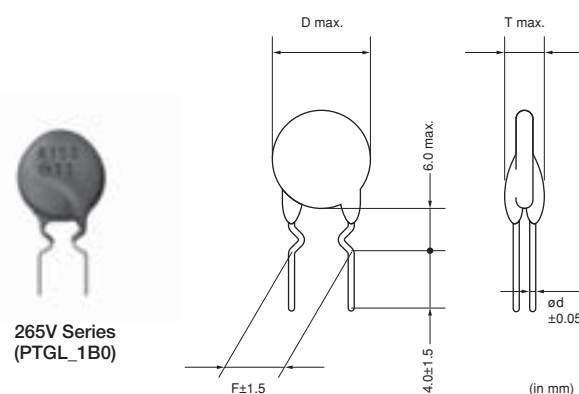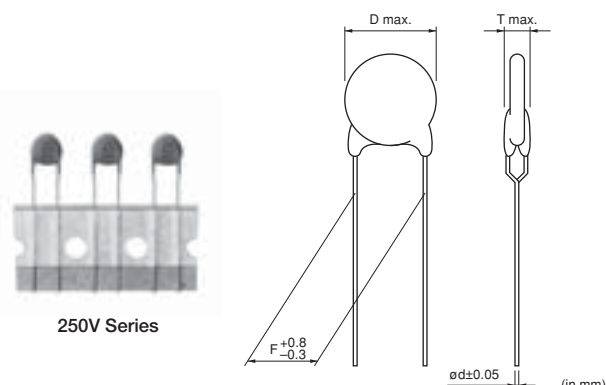

| Part Number        | Max. Voltage (V) | Hold Current (at +60°C) (mA) | Hold Current (at +25°C) (mA) | Trip Current (at +25°C) (mA) | Trip Current (at -10°C) (mA) | Max. Current (A) | Resistance (at +25°C) (ohm) | Body Diameter (D) (mm) | Thickness (T) (mm) | Lead Space (F) (mm) | Lead Diameter (phi d) (mm) |
|--------------------|------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------|-----------------------------|------------------------|--------------------|---------------------|----------------------------|
| PTGL07BB220N0B52A0 | 250              | 90                           | 130                          | 250                          | 300                          | 0.5              | 22 ±30%                     | 8.0                    | 6.0                | 5.0                 | 0.6                        |
| PTGL10BB120N0P52A0 | 250              | 90                           | 130                          | 250                          | 300                          | 0.6              | 12 ±30%                     | 11.0                   | 6.0                | 5.0                 | 0.6                        |
| PTGL09AR390N0B52A0 | 250              | 100                          | 115                          | 245                          | 280                          | 0.6              | 39 ±30%                     | 10.0                   | 6.0                | 5.0                 | 0.6                        |
| PTGL05AR151H8P52B0 | 265              | 28                           | 35                           | 65                           | 78                           | 0.2              | 150 ±25%                    | 6.0                    | 6.0                | 5.0                 | 0.6                        |
| PTGL05AR181M9N51B0 | 265              | 29                           | 37                           | 60                           | 70                           | 0.3              | 180 ±20%                    | 6.5                    | 6.5                | 5.0                 | 0.5                        |
| PTGL05AR121M9N51B0 | 265              | 35                           | 47                           | 75                           | 85                           | 0.3              | 120 ±20%                    | 6.5                    | 6.5                | 5.0                 | 0.5                        |
| PTGL07AR820M9A51B0 | 265              | 60                           | 75                           | 125                          | 150                          | 0.5              | 82 ±20%                     | 8.2                    | 6.5                | 5.0                 | 0.5                        |
| PTGL07AR700H8B52B0 | 265              | 66                           | 85                           | 160                          | 185                          | 0.4              | 70 ±25%                     | 8.0                    | 6.0                | 5.0                 | 0.6                        |
| PTGL07AR650H8B52B0 | 265              | 68                           | 84                           | 162                          | 190                          | 1.0              | 65 ±25%                     | 8.0                    | 6.0                | 5.0                 | 0.6                        |
| PTGL07AR450H8B52B0 | 265              | 80                           | 105                          | 200                          | 220                          | 1.0              | 45 ±25%                     | 8.0                    | 6.0                | 5.0                 | 0.6                        |
| PTGL07AR560M9A51B0 | 265              | 80                           | 95                           | 165                          | 190                          | 0.8              | 56 ±20%                     | 8.2                    | 6.5                | 5.0                 | 0.5                        |
| PTGL09AR390M9C61B0 | 265              | 100                          | 130                          | 210                          | 240                          | 1.2              | 39 ±20%                     | 10.0                   | 6.5                | 6.5                 | 0.65                       |

Continued on the following page. ↗

Continued from the preceding page.

| Part Number        | Max. Voltage (V) | Hold Current (at +60°C) (mA) | Hold Current (at +25°C) (mA) | Trip Current (at +25°C) (mA) | Trip Current (at -10°C) (mA) | Max. Current (A) | Resistance (at +25°C) (ohm) | Body Diameter (D) (mm) | Thickness (T) (mm) | Lead Space (F) (mm) | Lead Diameter (phi d) (mm) |
|--------------------|------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------|-----------------------------|------------------------|--------------------|---------------------|----------------------------|
| PTGL09AR250H8B52B0 | 265              | 118                          | 150                          | 290                          | 330                          | 1.0              | 25 ±25%                     | 10.0                   | 6.0                | 5.0                 | 0.6                        |
| PTGL12AR270M9C01B0 | 265              | 150                          | 200                          | 310                          | 360                          | 1.5              | 27 ±20%                     | 14.0                   | 6.5                | 10.0                | 0.65                       |
| PTGL12AR150H8B72B0 | 265              | 165                          | 210                          | 400                          | 460                          | 1.5              | 15 ±25%                     | 12.5                   | 6.0                | 7.5                 | 0.6                        |
| PTGL14AR180M9C01B0 | 265              | 180                          | 230                          | 380                          | 440                          | 1.8              | 18 ±20%                     | 15.7                   | 6.5                | 10.0                | 0.65                       |
| PTGL13AR100H8B72B0 | 265              | 200                          | 260                          | 480                          | 560                          | 2.2              | 10 ±25%                     | 14.0                   | 6.0                | 7.5                 | 0.6                        |
| PTGL18AR6R0H8B72B0 | 265              | 300                          | 380                          | 715                          | 830                          | 4.1              | 6.0 ±25%                    | 18.5                   | 6.0                | 7.5                 | 0.6                        |


Maximum Current shows typical capacities of the transformer which can be used.

250/265V Series are recognized by UL.


Only PTGL\_52B0 type is available in taping type. Please refer to the page of "Package" information for details.

## ■ Protective Threshold Current Range (250V Series)


PTGL07BB220N0B52A0

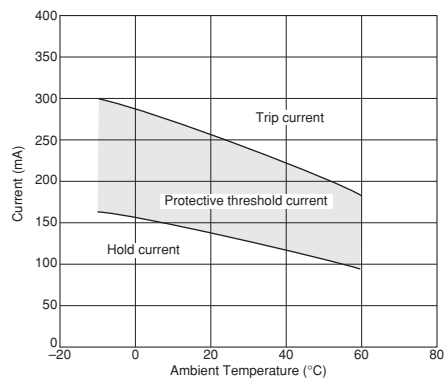

PTGL10BB120N0P52A0

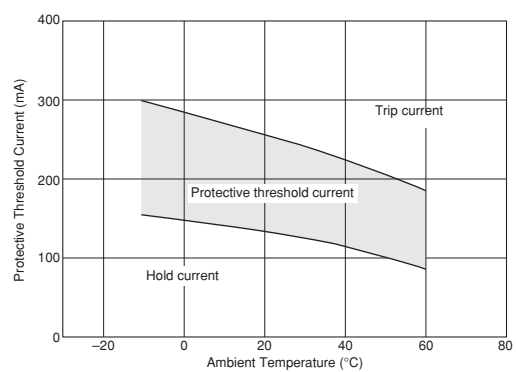


PTGL09AR390N0B52A0

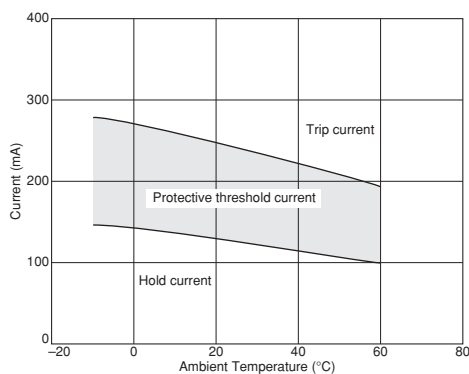


## ■ Protective Threshold Current Range (265V Series)

PTGL05AR151H8P52B0

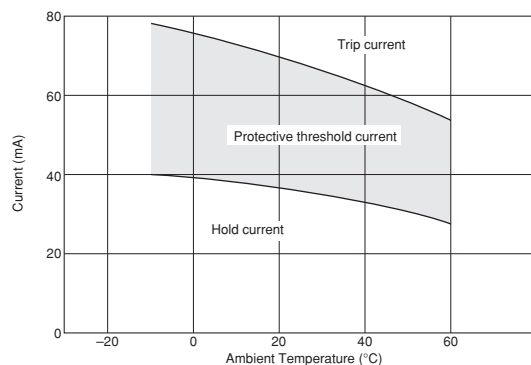

PTGL05AR181M9N51B0

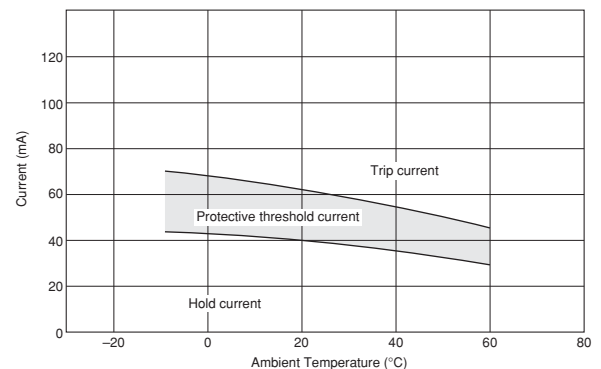


Continued on the following page. ➤


Continued from the preceding page.

## ■ Protective Threshold Current Range (265V Series)


PTGL05AR121M9N51B0

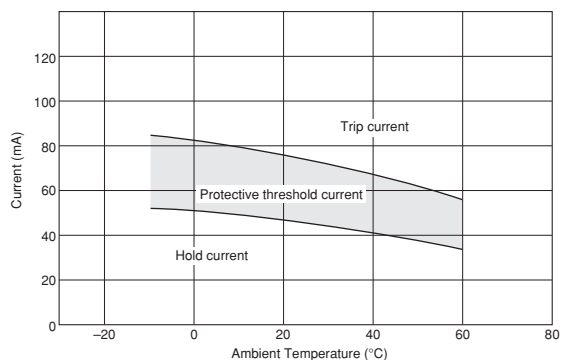


PTGL07AR820M9A51B0

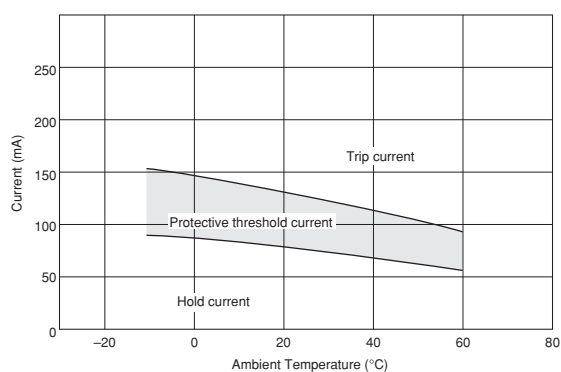


PTGL07AR700H8B52B0

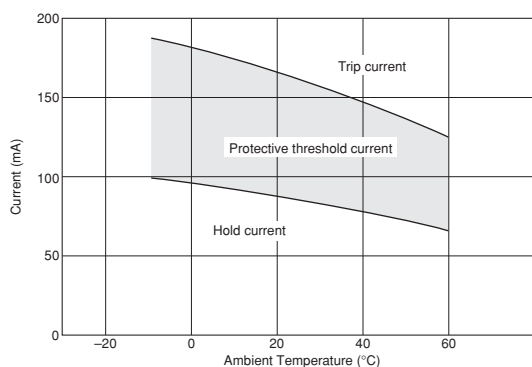


PTGL07AR650H8B52B0

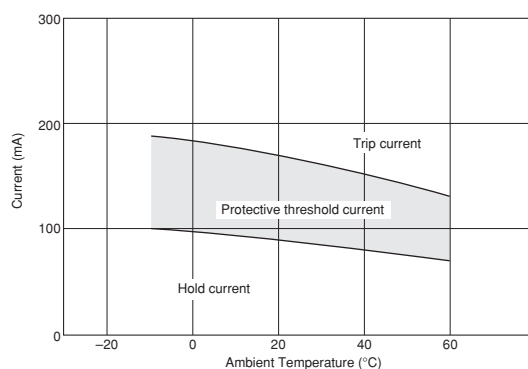


PTGL07AR450H8B52B0

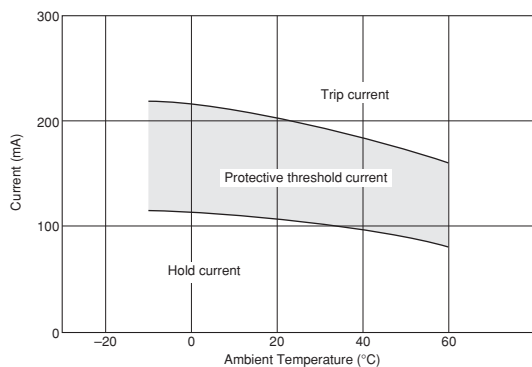


PTGL07AR560M9A51B0

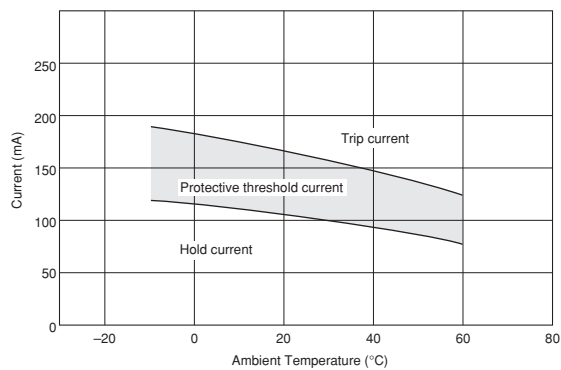

PTGL09AR390M9C61B0

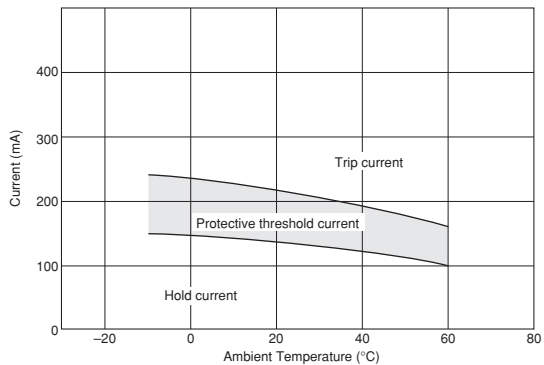

PTGL09AR250H8B52B0

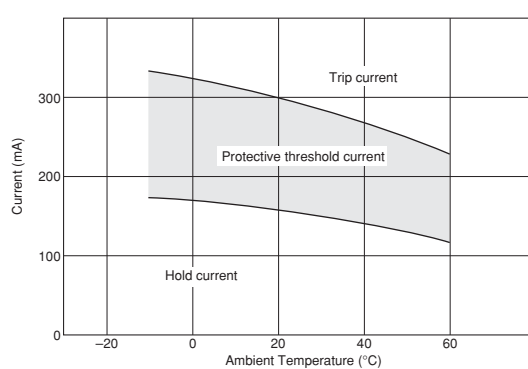


Continued on the following page. ➤


Continued from the preceding page.

## ■ Protective Threshold Current Range (265V Series)


PTGL12AR270M9C01B0

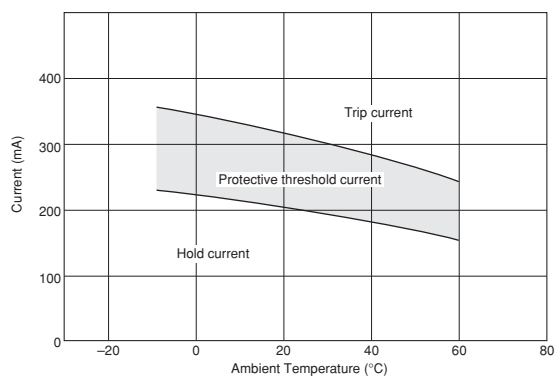


PTGL12AR150H8B72B0

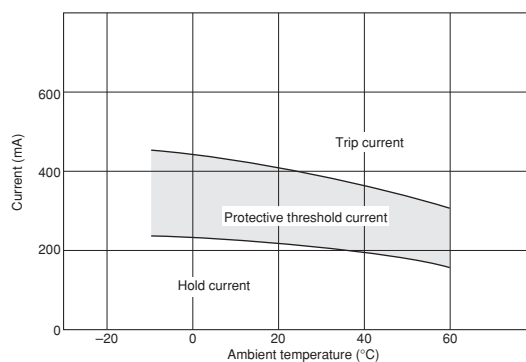


PTGL14AR180M9C01B0

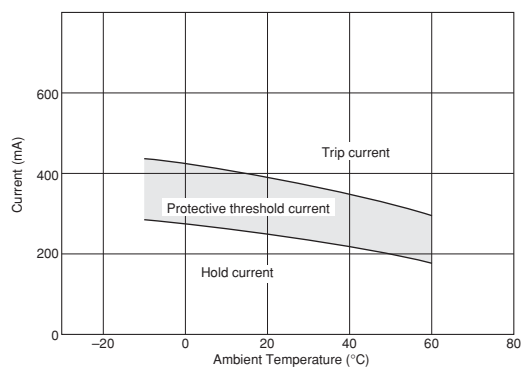

PTGL13AR100H8B72B0

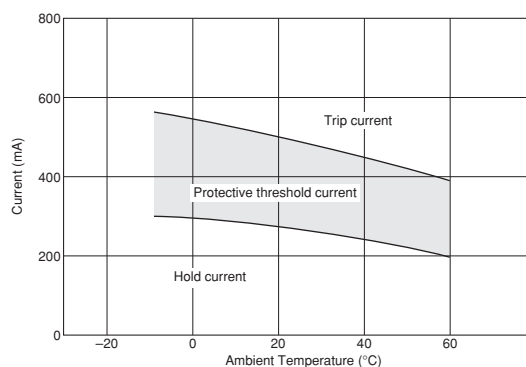


PTGL18AR6R0H8B72B0

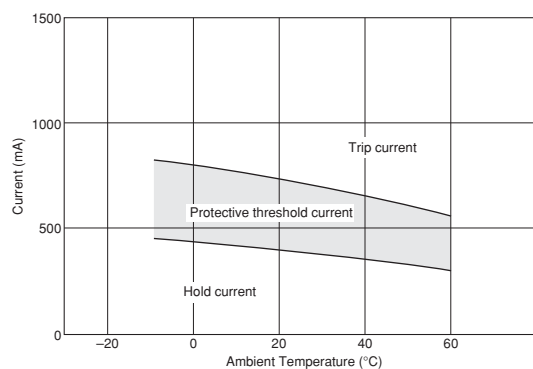


## ■ Operating Time 250V Series (Typical Curve)


PTGL07BB220N0B52A0

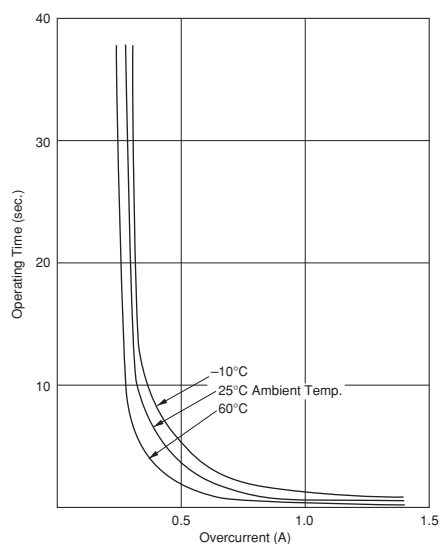

PTGL10BB120N0P52A0

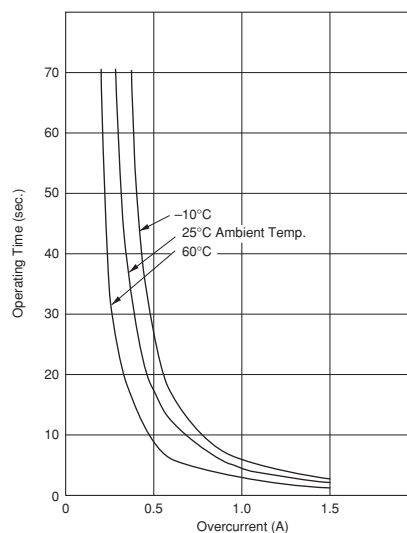


PTGL09AR390N0B52A0

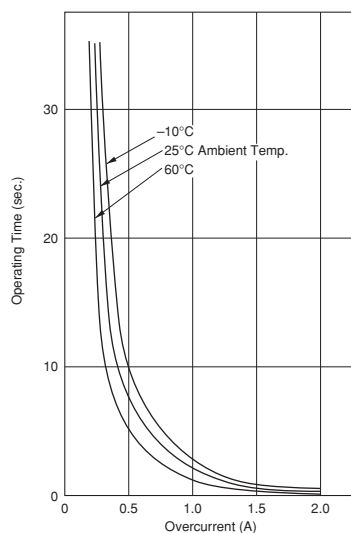


## ■ Operating Time 265V Series (Typical Curve)

PTGL05AR151H8P52B0

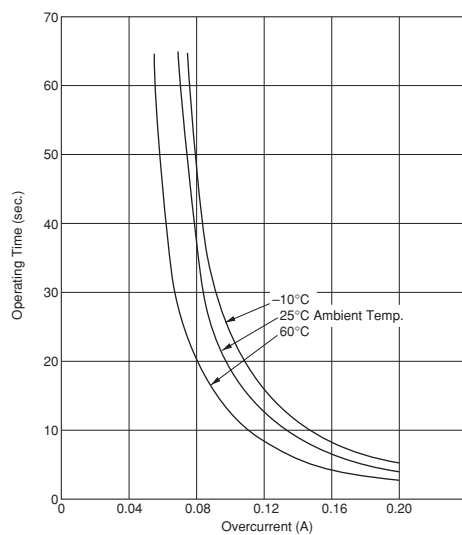

PTGL05AR181M9N51B0

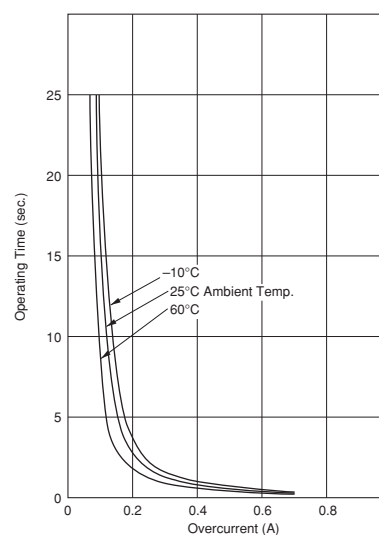


Continued on the following page. ↗


Continued from the preceding page.

## ■ Operating Time 265V Series (Typical Curve)


PTGL05AR121M9N51B0

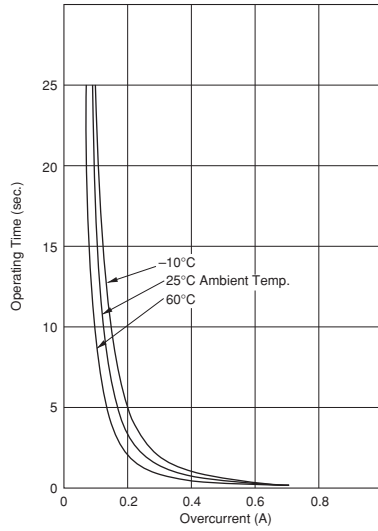


PTGL07AR820M9A51B0

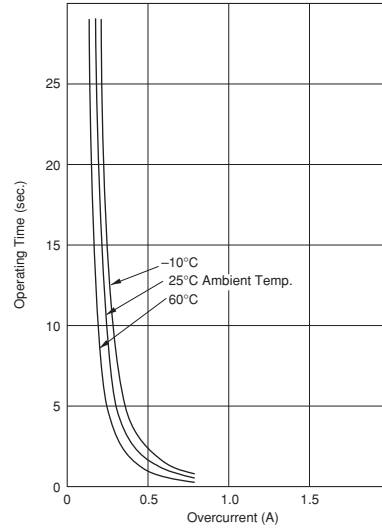


PTGL07AR700H8B52B0

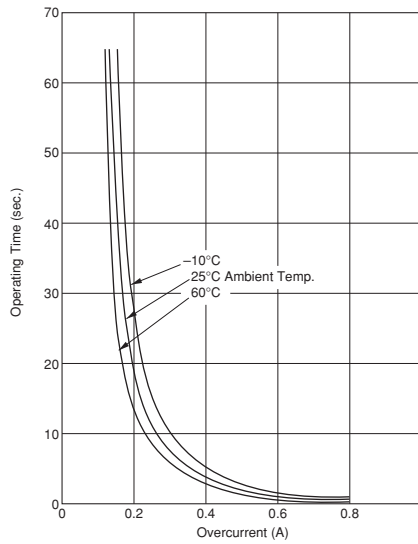


PTGL07AR650H8B52B0

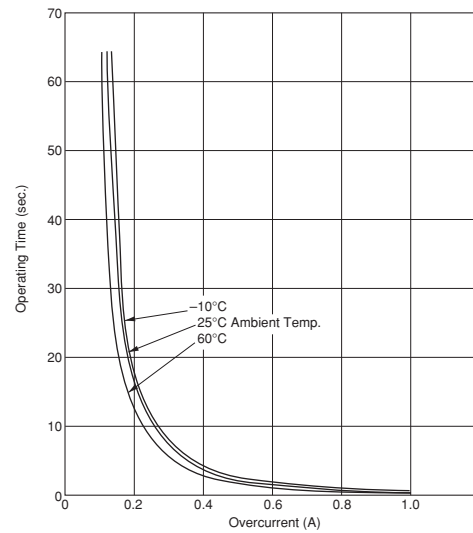

PTGL07AR450H8B52B0

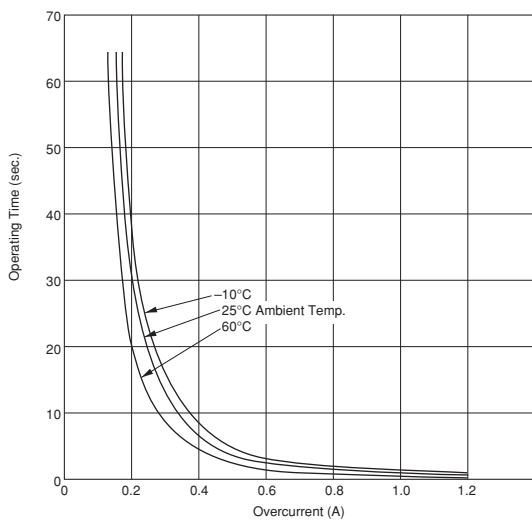

PTGL07AR560M9A51B0

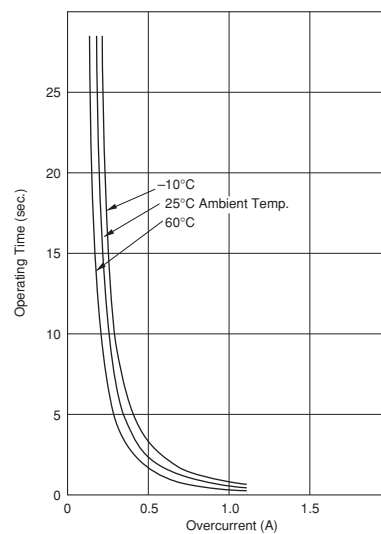


Continued on the following page. ➤


Continued from the preceding page.

## Operating Time 265V Series (Typical Curve)


PTGL09AR390M9C61B0

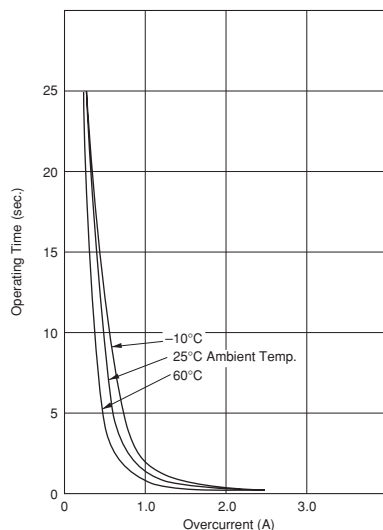


PTGL09AR250H8B52B0

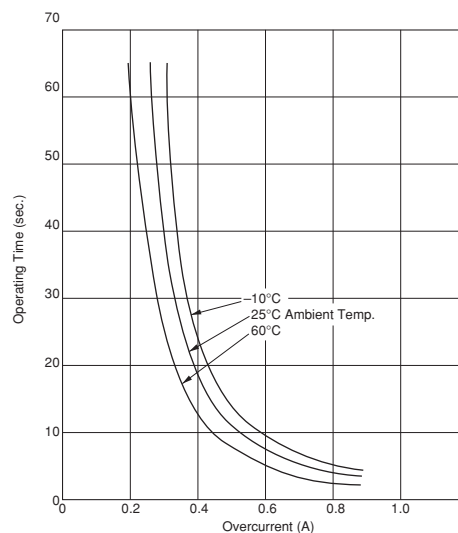


PTGL12AR270M9C01B0

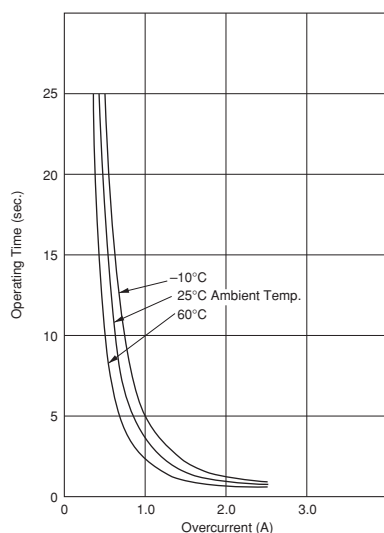


PTGL12AR150H8B72B0

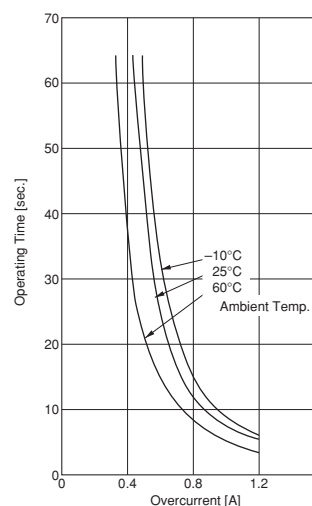

PTGL14AR180M9C01B0

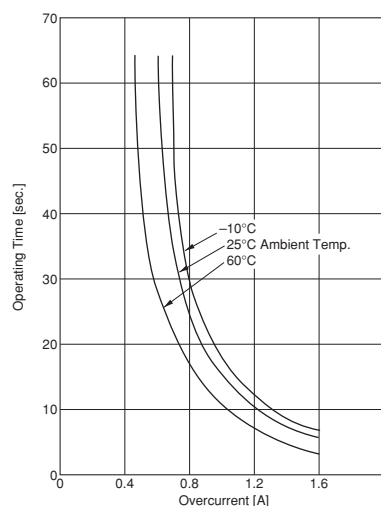

PTGL13AR100H8B72B0

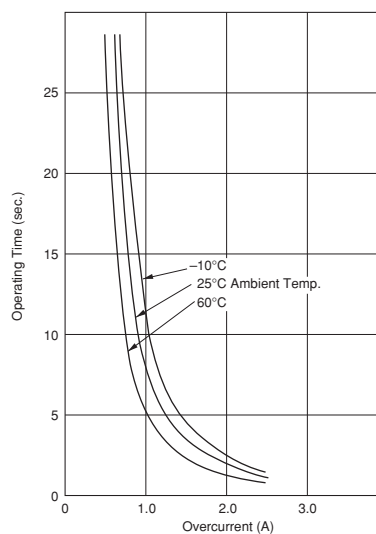


Continued on the following page.

Continued from the preceding page.


## Operating Time 265V Series (Typical Curve)

PTGL18AR6R0H8B72B0

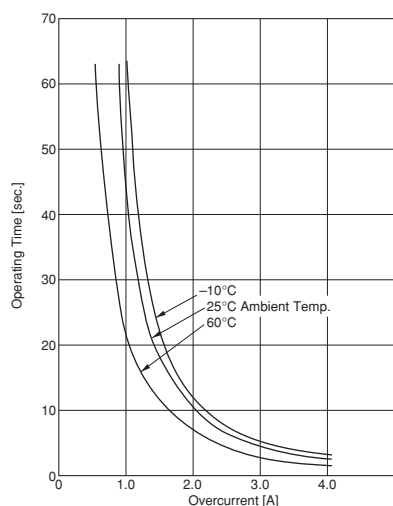


## Application Circuit


### (1) Transistor Protection Circuit

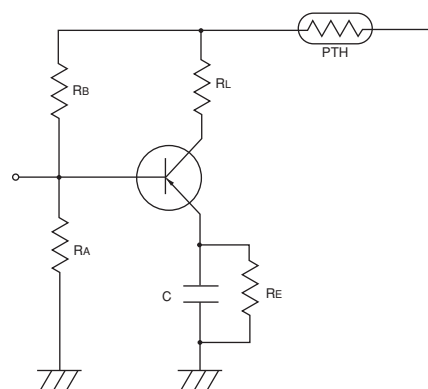


### (2) Transformer Protection Circuit 1

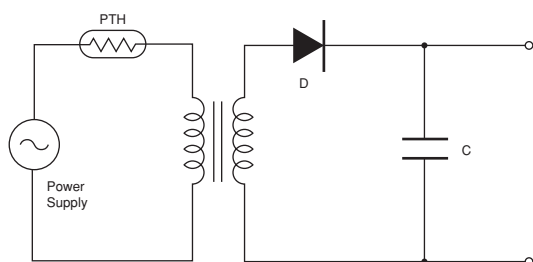


### (3) Transformer Protection Circuit 2

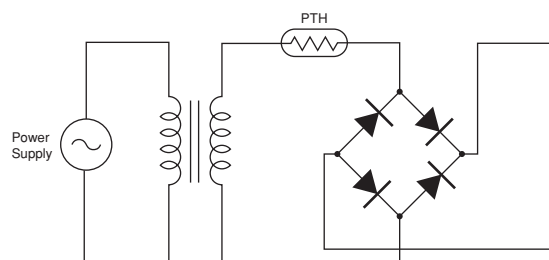

### (4) Fluorescent Lamp Protection Circuit

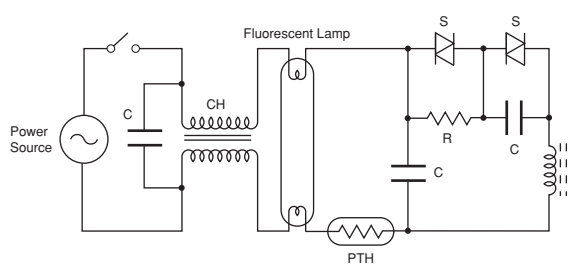

### (5) Telecommunication Circuit

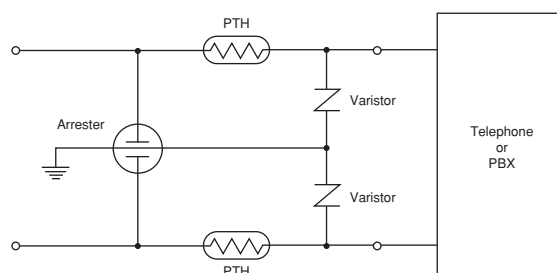

## PTGL Series Narrow Current Band Specifications and Test Methods

| No.           | Item                                   | Rating Value                                                                                                         | Method of Examination                                                                                                                                                                                                                                                                                                                                                                                                                                            |               |       |              |       |              |       |
|---------------|----------------------------------------|----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------|--------------|-------|--------------|-------|
| 1             | Operating Temperature                  | -30 to +85°C                                                                                                         | The temperature range with maximum voltage applied to the POSISTOR®.                                                                                                                                                                                                                                                                                                                                                                                             |               |       |              |       |              |       |
| 2             | Storage Temperature                    | -40 to +125°C                                                                                                        | The temperature range with zero voltage.                                                                                                                                                                                                                                                                                                                                                                                                                         |               |       |              |       |              |       |
| 3             | Resistance Value (at 25°C)             | Satisfies ratings                                                                                                    | Resistance value is measured by applying voltage under 1.0Vdc (by a direct current of less than 10mA) at 25°C. But it must be measured after maximum voltage is applied for 180 seconds and then is left for 2 hours at 25°C.                                                                                                                                                                                                                                    |               |       |              |       |              |       |
| 4             | Withstanding Voltage                   | No problem                                                                                                           | We apply AC voltage 120% that of the maximum voltage to POSISTOR® by raising voltage gradually for 180±5 seconds at 25°C. (A protective resistor is to be connected in series, and the inrush current through POSISTOR® must be limited below maximum rated value.)                                                                                                                                                                                              |               |       |              |       |              |       |
| 5             | Protective Threshold Current           | Satisfies ratings<br>(Trip Current, Hold Current)                                                                    | Maximum current is measured in this examination. Voltage is applied to POSISTOR® for 3 minutes step by step on still air based on "Protective Threshold Current Test Conditions" shown in next page. Stable current is measured at each step.                                                                                                                                                                                                                    |               |       |              |       |              |       |
| 6             | Tensile Strength of Lead Wire Terminal | No damage                                                                                                            | <div>The load is gradually applied to each terminal of POSISTOR® until the force of the following table in the axial direction with fixing POSISTOR®'s body itself and this load is kept for 10 seconds.</div> <table><tr><th>Lead Diameter</th><th>Force</th></tr><tr><td>ø0.60mm max.</td><td>4.90N</td></tr><tr><td>ø0.65mm min.</td><td>9.80N</td></tr></table>                                                                                              | Lead Diameter | Force | ø0.60mm max. | 4.90N | ø0.65mm min. | 9.80N |
| Lead Diameter | Force                                  |                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               |       |              |       |              |       |
| ø0.60mm max.  | 4.90N                                  |                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               |       |              |       |              |       |
| ø0.65mm min.  | 9.80N                                  |                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               |       |              |       |              |       |
| 7             | Bending Strength of Lead Wire Terminal | Lead wire does not come off                                                                                          | <div>POSISTOR® is held so that it is perpendicular to the lead wire with the following lead hanging in the axial direction of the lead wire.</div> <div>The lead wire is slowly bent to 90° and returned.</div> <div>Then it is slowly bent in the opposite direction and returned to original state.</div> <table><tr><th>Lead Diameter</th><th>Force</th></tr><tr><td>ø0.60mm max.</td><td>2.45N</td></tr><tr><td>ø0.65mm min.</td><td>4.90N</td></tr></table> | Lead Diameter | Force | ø0.60mm max. | 2.45N | ø0.65mm min. | 4.90N |
| Lead Diameter | Force                                  |                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               |       |              |       |              |       |
| ø0.60mm max.  | 2.45N                                  |                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               |       |              |       |              |       |
| ø0.65mm min.  | 4.90N                                  |                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               |       |              |       |              |       |
| 8             | Solderability                          | Solder is applied around the lead wire covering 3/4 or more of the circumference without gap in the axial direction. | The Lead wire of POSISTOR® is soaked in an Isopropyl Alcohol (JIS K 8839) solution (about 25wt%) of colophony (JIS K 5902) for 5-10 sec. Each lead wire is soaked in molten solder (JIS Z 3282 H60A) at 235±5°C from the bottom to a point of 2.0-2.5mm for 2±0.5 seconds.                                                                                                                                                                                       |               |       |              |       |              |       |
| 9             | Terminal Durability of Soldering       | ΔR/R25≤±15%                                                                                                          | The lead wire of POSISTOR® is soaked in molten solder (JIS Z 3282 H60A) at 350±10°C from the bottom to a point of 2.0-2.5mm for 3.5±0.5 seconds.<br>After the device is left at room temperature (25°C) for 24±4 hours, the resistance is then measured.                                                                                                                                                                                                         |               |       |              |       |              |       |
| 10            | Humidity Test                          | ΔR/R25≤±20%                                                                                                          | POSISTOR® is set in an environmental chamber at 60±2°C and 90-95% humidity for 500±4 hours.<br>After the device is left at room temperature (25°C) for one hour, the resistance measurement is then performed.                                                                                                                                                                                                                                                   |               |       |              |       |              |       |
| 11            | Load Test at High Temperature          | ΔR/R25≤±20%                                                                                                          | POSISTOR® is set in an environmental chamber at 85±3°C with maximum voltage applied for 500±4 hours. After the device is left at room temperature (25°C) for one hour, the resistance measurement is performed. (A protective resistor is to be connected in series and the inrush current through POSISTOR® must be limited below maximum rated value.)                                                                                                         |               |       |              |       |              |       |
| 12            | Load Cycle Test at Room Temperature    | ΔR/R25≤±20%                                                                                                          | POSISTOR® is set at room temperature (25±2°C) with maximum voltage applied for 1 minute and then is left without voltage applied for 5 minutes. This cycle is repeated for 100 cycles, and after the device is left at room temperature (25°C) for one hour, the resistance measurement is performed. (A protective resistor is to be connected in series and the inrush current through POSISTOR® must be limited below maximum rated value.)                   |               |       |              |       |              |       |

Continued on the following page. 

## PTGL Series Narrow Current Band Specifications and Test Methods

Continued from the preceding page.


### ■ Protective Threshold Current Test Conditions

#### 1. Substrate

Materials: Phenol


Size: 50x50x1.6mm

Land Pattern: Cu land without through hole

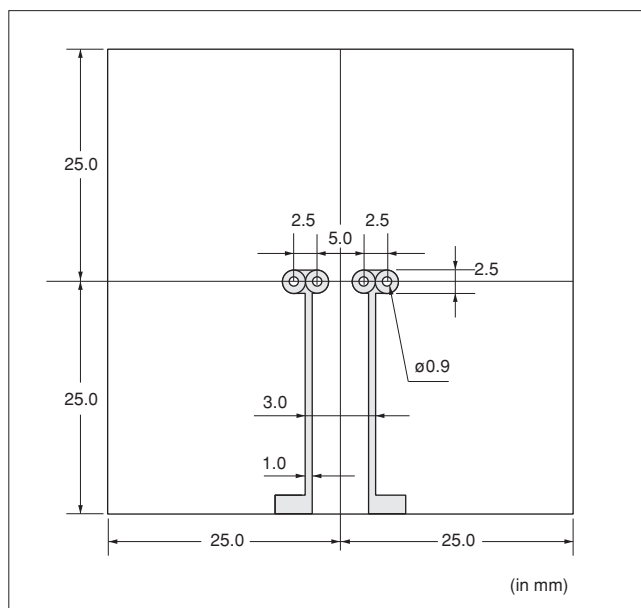


#### 2. Measurement condition

Solder POSISTOR® on the substrate, then put a 150mm<sup>3</sup> cover surrounding POSISTOR® to prevent airflow.

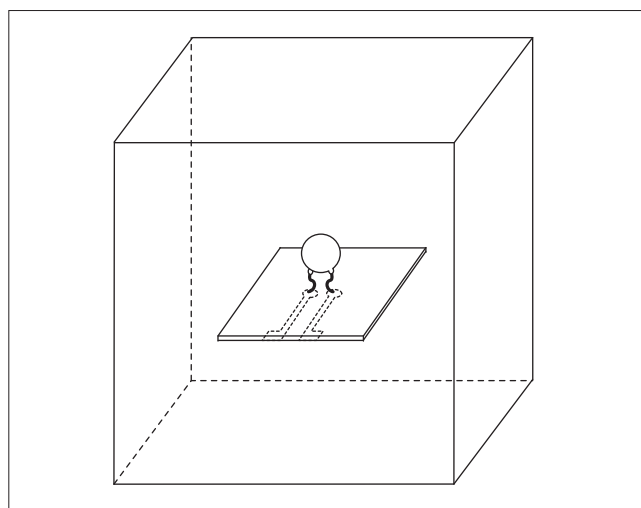

#### 3. Measurement circuit

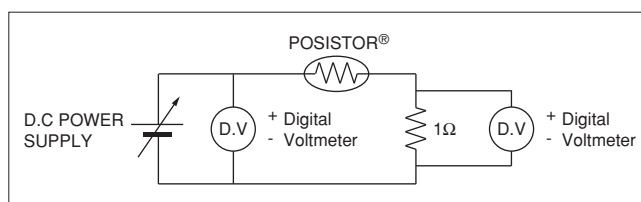

## PTGL Series Specifications and Test Methods

| Item                                   | Rating Value                                                                                                         | Method of Examination                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |       |              |       |              |       |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------|--------------|-------|--------------|-------|
| Continuous Operating Temperature       | -10 to +60 °C                                                                                                        | The temperature range with maximum voltage applied to the POSISTOR®.                                                                                                                                                                                                                                                                                                                                                                                     |               |       |              |       |              |       |
| Resistance Value (at 25°C)             | Satisfies ratings                                                                                                    | Resistance value is measured by applying voltage under 1.5Vdc (by a direct current of less than 10mA) at 25°C. But it must be measured after maximum voltage is applied for 180 seconds and then is left for 2 hours at 25°C. As for 16V series, measurement probes should be connected on the lead wire at the point within 2mm from the below side of the forming. Resistance should be measured by 4 wiring method.                                   |               |       |              |       |              |       |
| Withstanding Voltage                   | No problem                                                                                                           | We apply AC voltage 120% (16V Series: 110%) that of the maximum voltage to POSISTOR® by raising voltage gradually for 180±5 seconds at 25°C. (A protective resistor is to be connected in series, and the inrush current through POSISTOR® must be limited below max. rated value.)                                                                                                                                                                      |               |       |              |       |              |       |
| Tensile Strength of Lead Wire Terminal | No damage                                                                                                            | <div>The load is gradually applied to each terminal of POSISTOR® until the force of the following table in the axial direction with fixing POSISTOR®'s body itself and this load is being kept for 10 seconds.</div> <table><tr><th>Lead Diameter</th><th>Force</th></tr><tr><td>ø0.60mm max.</td><td>4.90N</td></tr><tr><td>ø0.65mm min.</td><td>9.80N</td></tr></table>                                                                                | Lead Diameter | Force | ø0.60mm max. | 4.90N | ø0.65mm min. | 9.80N |
| Lead Diameter                          | Force                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |               |       |              |       |              |       |
| ø0.60mm max.                           | 4.90N                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |               |       |              |       |              |       |
| ø0.65mm min.                           | 9.80N                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |               |       |              |       |              |       |
| Bending Strength of Lead Wire Terminal | Lead wire does not come off.                                                                                         | <div>POSISTOR® is held so that it is perpendicular to the lead wire with the following lead hanging in the axial direction of the lead wire. The lead wire is slowly bent to 90° and returned. Then it is slowly bent in the opposite direction and returned to original state.</div> <table><tr><th>Lead Diameter</th><th>Force</th></tr><tr><td>ø0.60mm max.</td><td>2.45N</td></tr><tr><td>ø0.65mm min.</td><td>4.90N</td></tr></table>               | Lead Diameter | Force | ø0.60mm max. | 2.45N | ø0.65mm min. | 4.90N |
| Lead Diameter                          | Force                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |               |       |              |       |              |       |
| ø0.60mm max.                           | 2.45N                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |               |       |              |       |              |       |
| ø0.65mm min.                           | 4.90N                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |               |       |              |       |              |       |
| Solderability                          | Solder is applied around the lead wire covering 3/4 or more of the circumference without gap in the axial direction. | The Lead wire of POSISTOR® is soaked in an Isopropyl Alcohol (JIS K 8839) or ethanol (JIS K 8101) solution (about 25wt%) of colophony (JIS K 5902) for 5 to 10 sec. And, each lead wire is soaked in molten solder (JIS Z 3282 H60A) at 235±5°C from the bottom to a point of 2.0 to 2.5mm for 2±0.5 sec.                                                                                                                                                |               |       |              |       |              |       |
| Terminal Durability of Soldering       | ΔR/R25≤±15%                                                                                                          | The lead wire of POSISTOR® is soaked in molten solder (JIS Z 3282 H60A) at 350±10°C from the bottom to a point of 2.0 to 2.5mm for 3.5±0.5 sec. After the device is being left at room temperature (25°C) for 24±4 hours, the resistance is measured.                                                                                                                                                                                                    |               |       |              |       |              |       |
| Humidity Test                          | ΔR/R25≤±20%                                                                                                          | POSISTOR® is set in an environmental chamber at 40±2°C and 90 to 95% humidity for 500±4 hours. After the device is left at room temperature (25°C) for one hour, the resistance measurement is performed.                                                                                                                                                                                                                                                |               |       |              |       |              |       |
| Load Cycle Test at High Temperature    | ΔR/R25≤±20%                                                                                                          | POSISTOR® is set in an environmental chamber at 60±3°C with maximum voltage applied for 1.5 hours and then is left without voltage applied for 0.5 hours. This cycle is repeated for 1000±10 hours, and after the device is left at room temperature (25°C) for one hour, the resistance measurement is performed. (A protective resistor is to be connected in series and the inrush current through POSISTOR® must be limited below max. rated value.) |               |       |              |       |              |       |

# POSISTOR® for Circuit Protection

**muRata**

## Inrush Current Suppression (Less than 100μF)

POSISTOR® is one of lead type PTC Thermistor that is able to support overcurrent or inrush current issue on the power supply circuit.

It is able to integrated circuit for protection from inrush current suppression with POSISTOR® and relay or semiconductor switch as thyristor.

### ■ Features

1. Protection against overcurrent situations
2. Automatic reset from protective trip mode
3. Space-saving
4. Various characteristics to meet a suitable resistance value

### ■ Applications

POSISTOR® is an integrated solution to work as both current limit resistor and overcurrent fuse. It works as a stable resistor in normal operation and products itself against overcurrent situation.

It can be replaced from normal resistor or the resistor with temperature fuses solution as Fig.1.

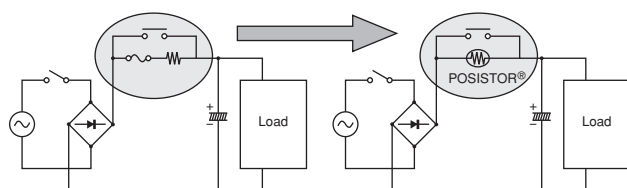


Fig.1

POSISTOR® works as normal resistor in normal condition, and it works as protector against over current situation on the circuit.

1. High-power switching power supply (LCD TV)
2. The power supply for inverter on outside unit for Air-conditioner
3. The power supply for inverter type fluorescent lamp
4. Other SW type power supply


| Part Number        | Max. Voltage (V) | Resistance (at +25°C) (ohm) | Max. Inrush Current (A) | Max. Applying Time of Inrush (ms) | Body Diameter (D) (mm) | Thickness (T) (mm) | Lead Space (F) (mm) | Lead Diameter (phi d) (mm) |
|--------------------|------------------|-----------------------------|-------------------------|-----------------------------------|------------------------|--------------------|---------------------|----------------------------|
| PTGL07AS121M0N51B0 | 280              | 120 ±20%                    | 8.46 peak               | 10                                | 7.8                    | 6.0                | 5.0                 | 0.5                        |
| PTGL07AS181M0N51B0 | 280              | 180 ±20%                    | 6.22 peak               | 10                                | 7.8                    | 6.0                | 5.0                 | 0.5                        |
| PTGL07AS201M0N51B0 | 280              | 200 ±20%                    | 5.66 peak               | 10                                | 7.8                    | 6.0                | 5.0                 | 0.5                        |

Max. inrush current shows the maximum inrush current value which be introduced into "POSISTOR" at operating temperature range.

Max. applying time of inrush shows the maximum applying time of inrush current value at operating temperature range.

Operating temperature range is -40 to +105°C.

Taping type of part numbers with "A0" is available.

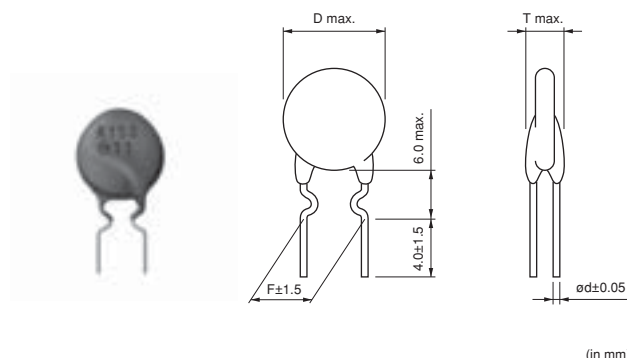

(in mm)

# POSISTOR® for Circuit Protection



## Inrush Current Suppression for High Capacitance (100μF or more)

POSISTOR® is one of lead type PTC Thermistor that is able to support overcurrent or inrush current issue on the power supply circuit.

It is able to integrated circuit for protection from inrush current suppression with POSISTOR® and relay or semiconductor switch as thyristor.

### ■ Features

1. Protection against overcurrent situations
2. Automatic reset from protective trip mode
3. Space-saving
4. Various characteristics to meet a suitable resistance value

### ■ Applications

POSISTOR® is an integrated solution to work as both current limit resistor and overcurrent fuse. It works as a stable resistor in normal operation and products itself against overcurrent situation.

It can be replaced from normal resistor or the resistor with temperature fuses solution as Fig.1.

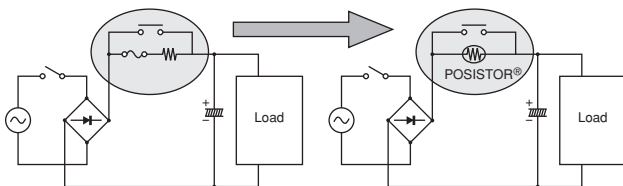


Fig.1

POSISTOR® works as normal resistor in normal condition, and it works as protector against over current situation on the circuit.

1. High-power switching power supply (LCD TV)
2. The power supply for inverter on outside unit for Air-conditioner
3. The power supply for inverter type fluorescent lamp
4. Other SW type power supply

| Part Number        | Max. Voltage (V) | Resistance (at +25°C) (ohm) | Max. Inrush Current (A) | Max. Charge Energy (at +60°C) (J) | Max. Charge Energy (at +85°C) (J) | Body Diameter (D) (mm) | Thickness (T) (mm) | Lead Space (F) (mm) | Lead Diameter (phi d) (mm) |
|--------------------|------------------|-----------------------------|-------------------------|-----------------------------------|-----------------------------------|------------------------|--------------------|---------------------|----------------------------|
| PTGL14AS470H0B02BZ | 280              | 47 ±25%                     | 27 peak                 | 106.9                             | 56.9                              | 16.0                   | 6.5                | 10.0                | 0.6                        |
| PTGL16AS330H0B02BZ | 280              | 33 ±25%                     | 39 peak                 | 130.8                             | 80.8                              | 18.0                   | 6.5                | 10.0                | 0.6                        |
| PTGL16AS470H0B02BZ | 280              | 47 ±25%                     | 27 peak                 | 130.8                             | 80.8                              | 18.0                   | 6.5                | 10.0                | 0.6                        |
| PTGL16AS680H0B02BZ | 280              | 68 ±25%                     | 19 peak                 | 130.8                             | 80.8                              | 18.0                   | 6.5                | 10.0                | 0.6                        |
| PTGL16AS101H0B02BZ | 280              | 100 ±25%                    | 13 peak                 | 130.8                             | 80.8                              | 18.0                   | 6.5                | 10.0                | 0.6                        |
| PTGL20AS330H0D02BZ | 280              | 33 ±25%                     | 39 peak                 | 181.7                             | 131.7                             | 22.0                   | 6.5                | 10.0                | 0.8                        |
| PTGL20AS470H0D02BZ | 280              | 47 ±25%                     | 27 peak                 | 181.7                             | 131.7                             | 22.0                   | 6.5                | 10.0                | 0.8                        |

Max. inrush current shows the maximum applying time of inrush current value at operating temperature range.

Max charge energy is defined as the maximum charged up energy value of over 95%.


The capacitance is calculated as the following formula.

$$J = CV^2/2 \quad C: \text{capacitance, } V: \text{peak voltage}$$

Note: The criteria of the standard for the maximum charged up energy value of over 95%.

If there is the difference between our definition and yours, could you ask us free?

Operating temperature range is -20 to +85°C.

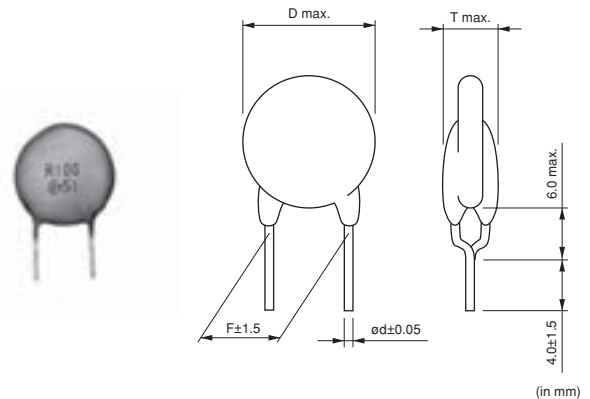

## Inrush Current Suppression Specifications and Test Methods

| Item                                | Rating Value                    | Method of Examination                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Humidity Test                       | $\Delta R/R_{25} \leq \pm 20\%$ | POSISTOR® is set in an environmental chamber at $85 \pm 3^\circ\text{C}$ and 85% humidity for $500 \pm 4$ hours.<br>After the device is left at room temperature ( $25^\circ\text{C}$ ) for one hour, the resistance measurement is performed.                                                                                               |
| High Temperature Continuous Load    | $\Delta R/R_{25} \leq \pm 20\%$ | POSISTOR® is set in an environmental chamber at $85 \pm 3^\circ\text{C}$ with maximum voltage applied for $500 \pm 4$ hours.<br>After the device is left at room temperature ( $25^\circ\text{C}$ ) for one hour, the resistance measurement is performed.                                                                                   |
| Load Cycle Test at Room Temperature | $\Delta R/R_{25} \leq \pm 20\%$ | POSISTOR® is set in a room temperature ( $25 \pm 2^\circ\text{C}$ ) with maximum voltage applied for 1 minute, and then is left without voltage applied for 5 minutes. This cycle is repeated for 10k cycles, and after the device is left at room temperature ( $25^\circ\text{C}$ ) for one hour, the resistance measurement is performed. |

# POSISTOR® for Circuit Protection




## Overheat Sensing Chip Tight Tolerance Type

This chip PTC Thermistor is a reflow soldering SMD type for overheat sensing for power transistors, power diodes and power ICs in hybrid circuits.

### ■ Features

1. SMD type is helpful for miniaturizing circuits because of its small size and light weight.
2. Excellent thermal response due to small size
3. Solid-state construction provides excellent resistance to mechanical vibration and impact resistance.
4. Contactless operation provides noiseless operation.



| Part Number | Dimensions (mm) |          |          |             |          |
|-------------|-----------------|----------|----------|-------------|----------|
|             | L               | W        | T        | e           | g        |
| PRF15_RC    | 1.0±0.05        | 0.5±0.05 | 0.5±0.05 | 0.15 to 0.4 | 0.3 min. |
| PRF18_RB    | 1.6±0.15        | 0.8±0.15 | 0.8±0.15 | 0.1 to 0.6  | -        |

### Chip Tight Tolerance Type 0402 (1005) Size

| Part Number     | Sensing Temperature<br>(at 10k ohm)<br>(°C) | Sensing Temperature<br>(at 100k ohm)<br>(°C) | Maximum<br>Voltage<br>(V) | Resistance<br>(at 25°C)<br>(k ohm) | Operating<br>Temperature Range<br>(°C) |
|-----------------|---------------------------------------------|----------------------------------------------|---------------------------|------------------------------------|----------------------------------------|
| PRF15AR102RB6RC | 135 ±5°C                                    | 150 ±3°C                                     | 32                        | 1 ±50%                             | -40 to 160                             |
| PRF15BA102RB6RC | 125 ±5°C                                    | 140 ±3°C                                     | 32                        | 1 ±50%                             | -40 to 150                             |
| PRF15BB102RB6RC | 115 ±5°C                                    | 130 ±3°C                                     | 32                        | 1 ±50%                             | -40 to 140                             |
| PRF15BC102RB6RC | 105 ±5°C                                    | 120 ±3°C                                     | 32                        | 1 ±50%                             | -40 to 130                             |
| PRF15BD102RB6RC | 95 ±5°C                                     | 110 ±3°C                                     | 32                        | 1 ±50%                             | -40 to 120                             |
| PRF15BE102RB6RC | 85 ±5°C                                     | 100 ±3°C                                     | 32                        | 1 ±50%                             | -40 to 110                             |
| PRF15BF102RB6RC | 75 ±5°C                                     | 90 ±3°C                                      | 32                        | 1 ±50%                             | -40 to 100                             |
| PRF15BG102RB6RC | 65 ±5°C                                     | 80 ±3°C                                      | 32                        | 1 ±50%                             | -40 to 90                              |

This series is applied to reflow soldering.

| Part Number     | Sensing Temperature<br>(at 4.7M ohm)<br>(°C) | Maximum<br>Voltage<br>(V) | Resistance<br>(at 25°C)<br>(k ohm) | Operating<br>Temperature Range<br>(°C) |
|-----------------|----------------------------------------------|---------------------------|------------------------------------|----------------------------------------|
| PRF15BB103RB6RC | 130 ±3°C                                     | 32                        | 10 ±50%                            | -20 to 140                             |
| PRF15BE103RB6RC | 100 ±3°C                                     | 32                        | 10 ±50%                            | -20 to 110                             |
| PRF15BG103RB6RC | 80 ±3°C                                      | 32                        | 10 ±50%                            | -20 to 90                              |

This series is applied to reflow soldering.

### Chip Tight Tolerance Type 0603 (1608) Size

| Part Number     | Sensing Temperature<br>(at 4.7k ohm)<br>(°C) | Sensing Temperature<br>(at 47k ohm)<br>(°C) | Maximum<br>Voltage<br>(V) | Resistance<br>(at 25°C)<br>(ohm) | Operating<br>Temperature Range<br>(°C) |
|-----------------|----------------------------------------------|---------------------------------------------|---------------------------|----------------------------------|----------------------------------------|
| PRF18BB471RB5RB | 115 ±3°C                                     | 130 ±7°C                                    | 32                        | 470 ±50%                         | -20 to 140                             |
| PRF18BC471RB5RB | 105 ±3°C                                     | 120 ±7°C                                    | 32                        | 470 ±50%                         | -20 to 130                             |
| PRF18BD471RB5RB | 95 ±3°C                                      | 110 ±7°C                                    | 32                        | 470 ±50%                         | -20 to 120                             |
| PRF18BE471RB5RB | 85 ±3°C                                      | 100 ±7°C                                    | 32                        | 470 ±50%                         | -20 to 110                             |
| PRF18BF471RB5RB | 75 ±3°C                                      | 90 ±7°C                                     | 32                        | 470 ±50%                         | -20 to 100                             |
| PRF18BG471RB5RB | 65 ±3°C                                      | 80 ±7°C                                     | 32                        | 470 ±50%                         | -20 to 90                              |

This series is applied to flow/reflow soldering.

This series is recognized by UL.

# POSISTOR® for Circuit Protection




## Overheat Sensing Chip Type

This chip PTC Thermistor is a reflow soldering SMD type for overheat sensing for power transistors, power diodes and power ICs in hybrid circuits.

### ■ Features

1. SMD type is helpful for miniaturizing circuits because of its small size and light weight.
2. Excellent thermal response due to small size
3. Solid-state construction provides excellent resistance to mechanical vibration and impact resistance.
4. Contactless operation provides noiseless operation.



| Part Number | Dimensions (mm) |          |          |            |          |
|-------------|-----------------|----------|----------|------------|----------|
|             | L               | W        | T        | e          | g        |
| PRF18_RB    | 1.6±0.15        | 0.8±0.15 | 0.8±0.15 | 0.1 to 0.6 | -        |
| PRF21_RA    | 2.0±0.2         | 1.25±0.2 | 0.9±0.2  | 0.2 min.   | 0.5 min. |

### Chip Type 0603 (1608) Size

| Part Number     | Sensing Temperature<br>(at 4.7k ohm)<br>(°C) | Sensing Temperature<br>(at 47k ohm)<br>(°C) | Maximum<br>Voltage<br>(V) | Resistance<br>(at 25°C)<br>(ohm) | Operating<br>Temperature Range<br>(°C) |
|-----------------|----------------------------------------------|---------------------------------------------|---------------------------|----------------------------------|----------------------------------------|
| PRF18AS471QB5RB | 145 ±5°C                                     | -                                           | 32                        | 470 ±50%                         | -20 to 160                             |
| PRF18AR471QB5RB | 135 ±5°C                                     | 150 ±7°C                                    | 32                        | 470 ±50%                         | -20 to 160                             |
| PRF18BA471QB5RB | 125 ±5°C                                     | 140 ±7°C                                    | 32                        | 470 ±50%                         | -20 to 150                             |
| PRF18BB471QB5RB | 115 ±5°C                                     | 130 ±7°C                                    | 32                        | 470 ±50%                         | -20 to 140                             |
| PRF18BC471QB5RB | 105 ±5°C                                     | 120 ±7°C                                    | 32                        | 470 ±50%                         | -20 to 130                             |
| PRF18BD471QB5RB | 95 ±5°C                                      | 110 ±7°C                                    | 32                        | 470 ±50%                         | -20 to 120                             |
| PRF18BE471QB5RB | 85 ±5°C                                      | 100 ±7°C                                    | 32                        | 470 ±50%                         | -20 to 110                             |
| PRF18BF471QB5RB | 75 ±5°C                                      | 90 ±7°C                                     | 32                        | 470 ±50%                         | -20 to 100                             |
| PRF18BG471QB5RB | 65 ±5°C                                      | 80 ±7°C                                     | 32                        | 470 ±50%                         | -20 to 90                              |

This series is applied to flow/reflow soldering.

This series is recognized by UL.

### Chip Type 0805 (2012) Size


| Part Number     | Sensing Temperature<br>(at 4.7k ohm)<br>(°C) | Maximum<br>Voltage<br>(V) | Resistance<br>(at 25°C)<br>(ohm) | Operating<br>Temperature Range<br>(°C) |
|-----------------|----------------------------------------------|---------------------------|----------------------------------|----------------------------------------|
| PRF21AS471QB5RA | 145 ±5°C                                     | 32                        | 470 ±50%                         | -20 to 160                             |
| PRF21AR471QB5RA | 135 ±5°C                                     | 32                        | 470 ±50%                         | -20 to 150                             |
| PRF21BA471QB5RA | 125 ±5°C                                     | 32                        | 470 ±50%                         | -20 to 140                             |
| PRF21BB471QB5RA | 115 ±5°C                                     | 32                        | 470 ±50%                         | -20 to 130                             |
| PRF21BC471QB5RA | 105 ±5°C                                     | 32                        | 470 ±50%                         | -20 to 120                             |
| PRF21BD471QB5RA | 95 ±5°C                                      | 32                        | 470 ±50%                         | -20 to 110                             |
| PRF21BE471QB5RA | 85 ±5°C                                      | 32                        | 470 ±50%                         | -20 to 100                             |

This series is applied to flow/reflow soldering.

This series is recognized by UL.

## Overheat Sensing Chip Type (Related Data)


### Standard Land Pattern Dimensions

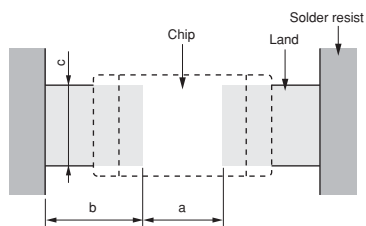


(in mm)

| Part Number | Soldering Methods | Dimensions (mm) |         |         |         |
|-------------|-------------------|-----------------|---------|---------|---------|
|             |                   | Chip (L×W)      | a       | b       | c       |
| PRF15       | Reflow Soldering  | 1.0×0.5         | 0.5     | 0.4-0.5 | 0.5     |
| PRF18       |                   | 1.6×0.8         | 0.6-0.8 | 0.6-0.7 | 0.6-0.8 |
| PRF21       |                   | 2.0×1.25        | 1.0-1.2 | 0.5-0.7 | 1.0-1.2 |


### Resistance - Temperature Characteristics (Typical)

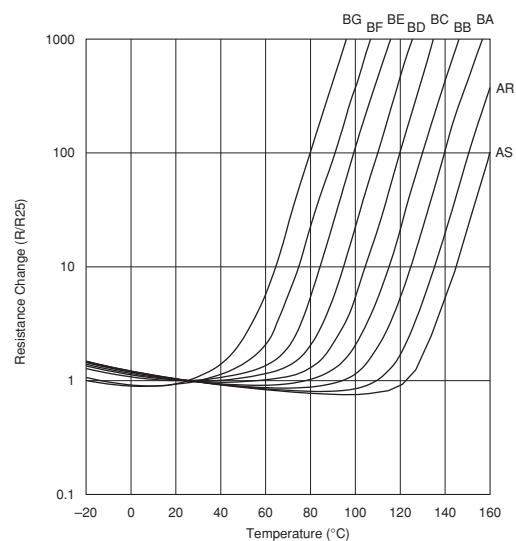

### Overheat Protection Circuit

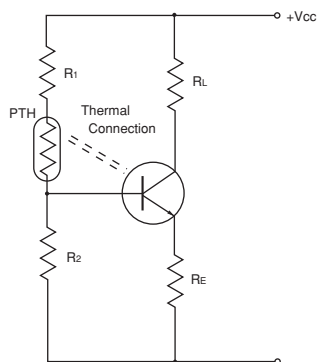


### Temperature Sensing Circuit

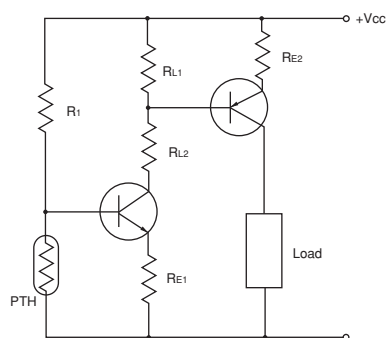


## Overheat Sensing Chip Tight Tolerance Type (Reference Data)

### ■ Resistance - Temperature Characteristics Range


PRF15AR102RB6RC

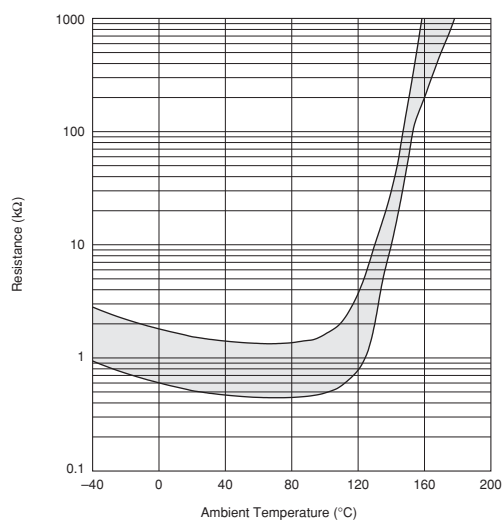


PRF15BA102RB6RC

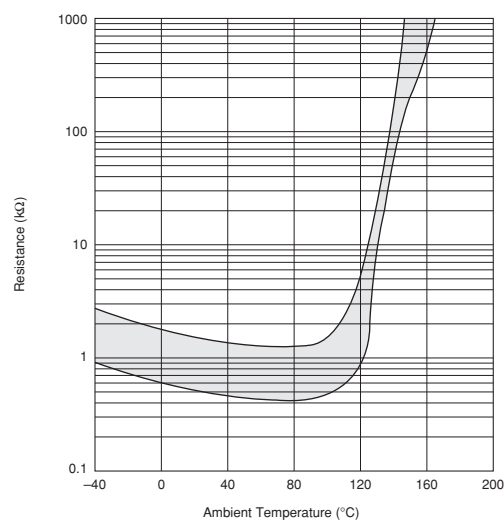


PRF15BB102RB6RC

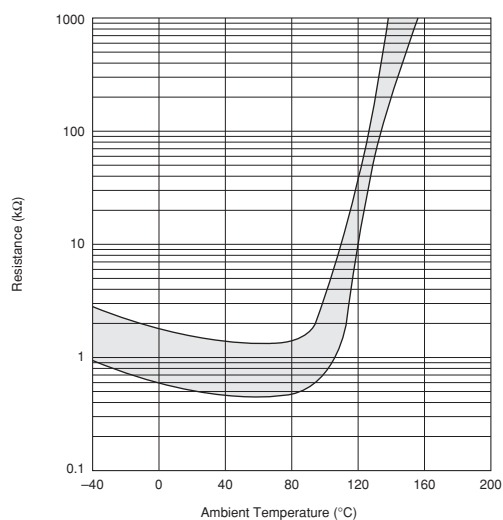


PRF15BC102RB6RC

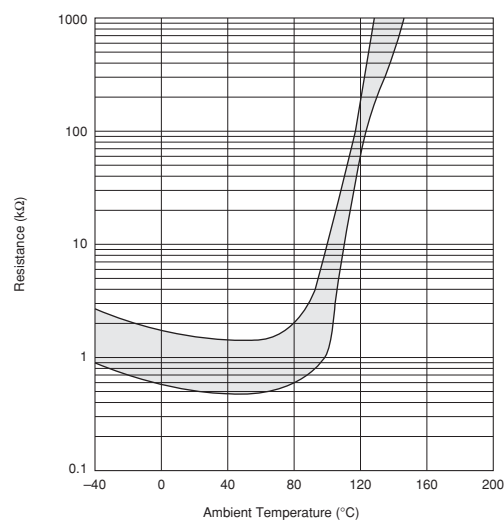

PRF15BD102RB6RC

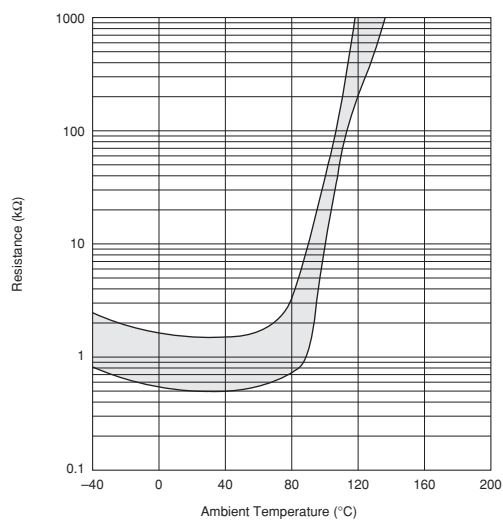

PRF15BE102RB6RC

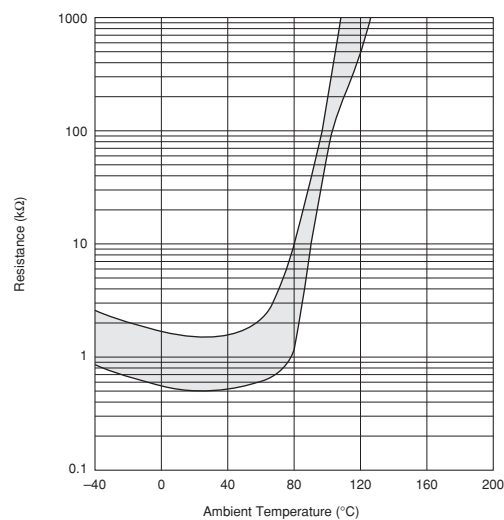


Continued on the following page. ↗

## Overheat Sensing Chip Tight Tolerance Type (Reference Data)


Continued from the preceding page.

### ■ Resistance - Temperature Characteristics Range


PRF15BF102RB6RC

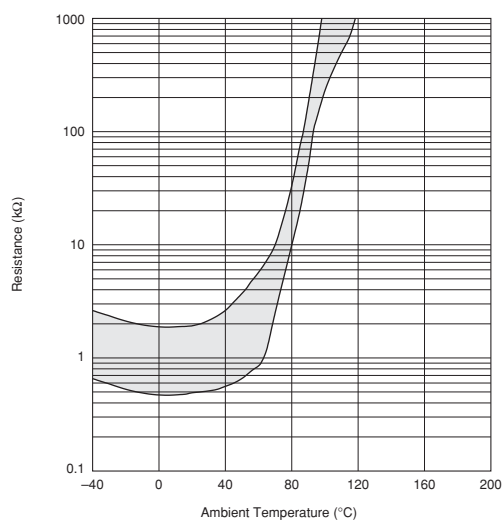


PRF15BG102RB6RC

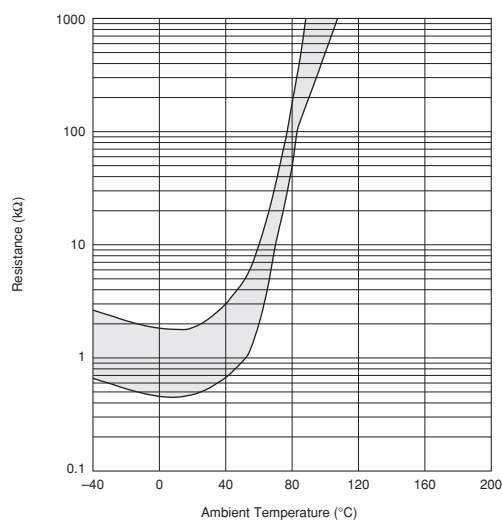


PRF15BB103RB6RC

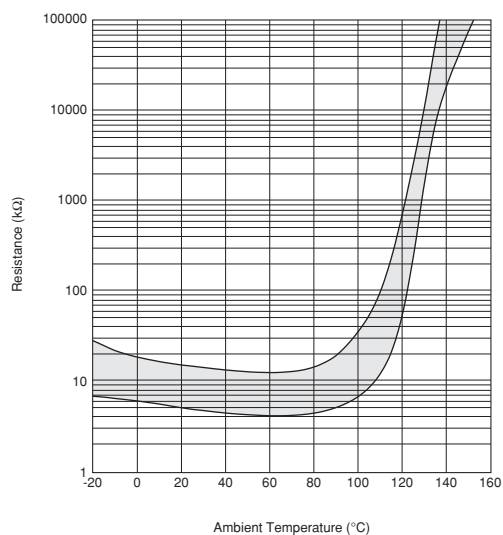


PRF15BE103RB6RC

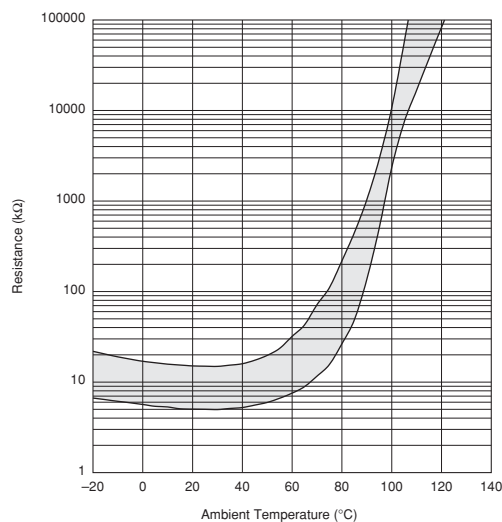

PRF15BG103RB6RC

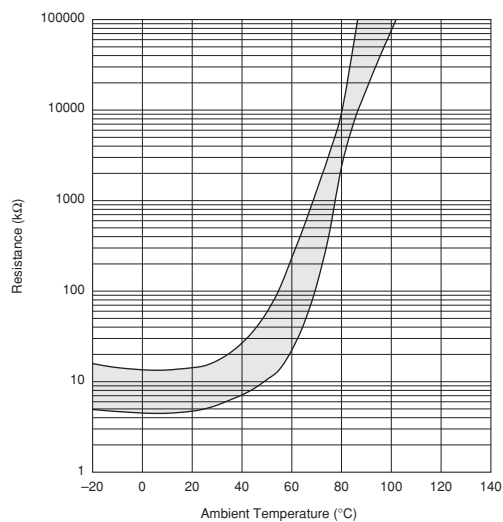

PRF18BB471RB5RB

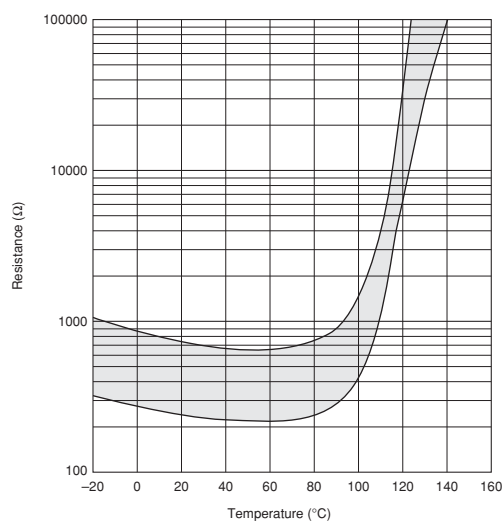


Continued on the following page. ➤

## Overheat Sensing Chip Tight Tolerance Type (Reference Data)


Continued from the preceding page.

### ■ Resistance - Temperature Characteristics Range


PRF18BC471RB5RB

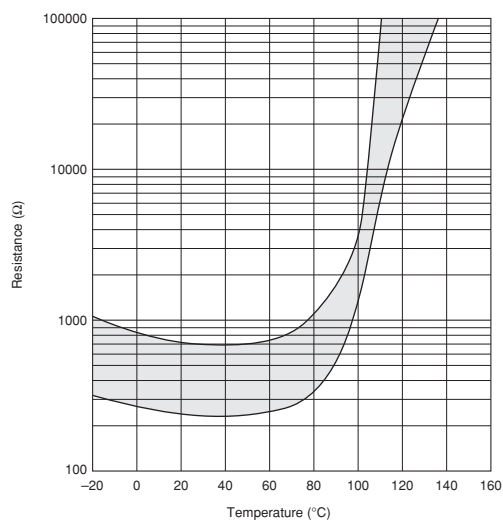


PRF18BD471RB5RB

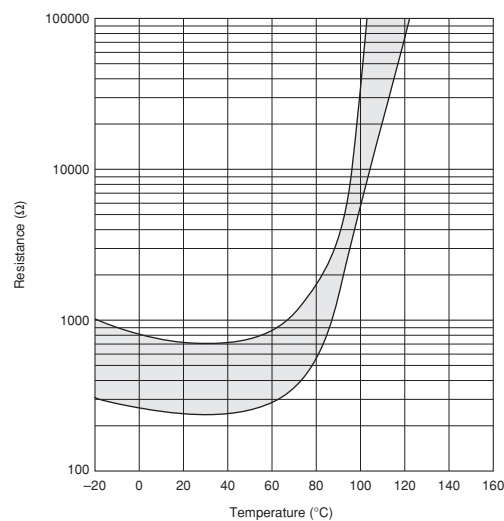


PRF18BE471RB5RB

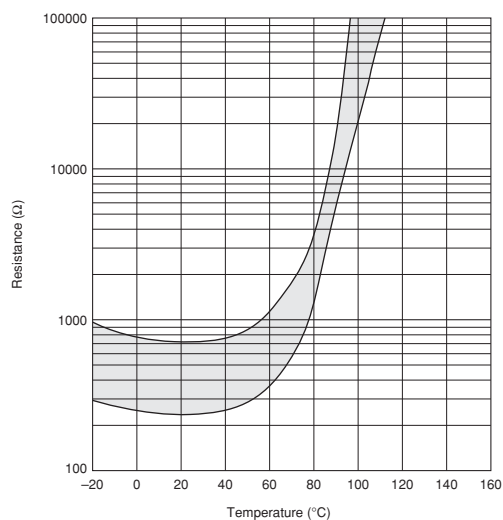

PRF18BF471RB5RB

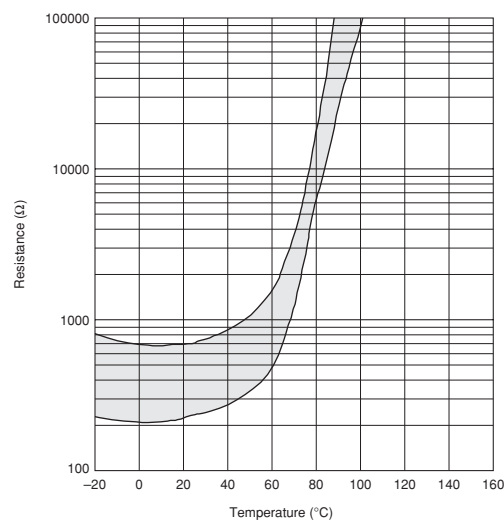


PRF18BG471RB5RB

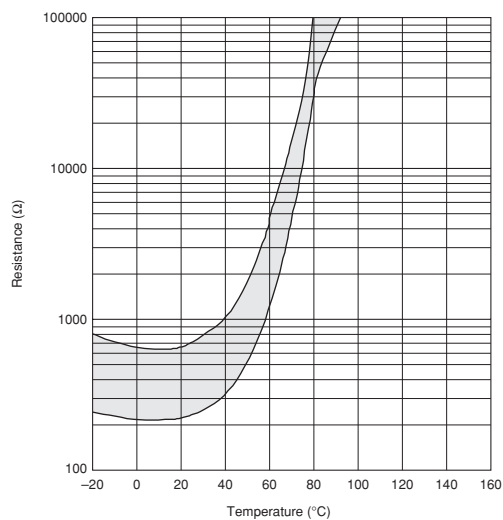


## Overheat Sensing Chip Type (Reference Data)

### ■ Resistance - Temperature Characteristics Range


PRF18/21AS471Q Type

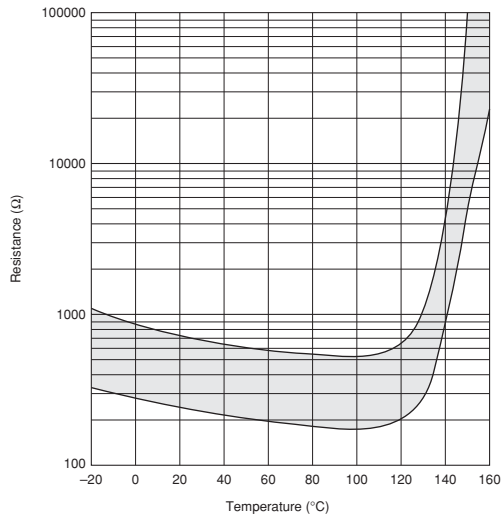


PRF18/21AR471Q Type

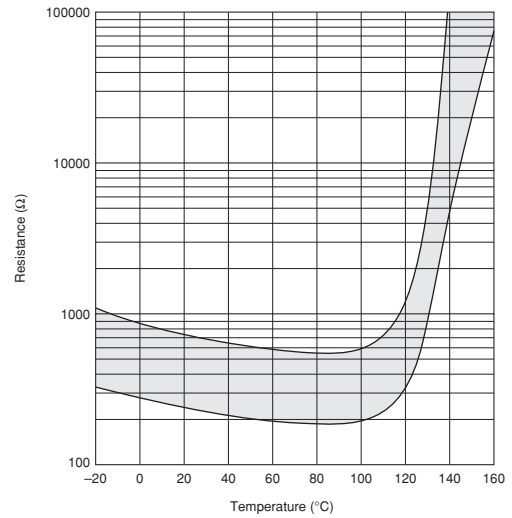


PRF18/21BA471Q Type

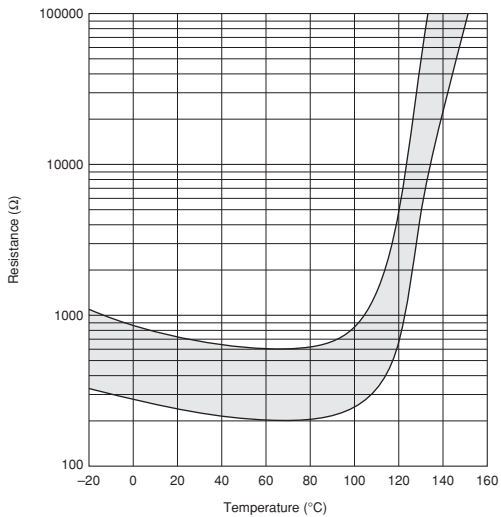


PRF18/21BB471Q Type

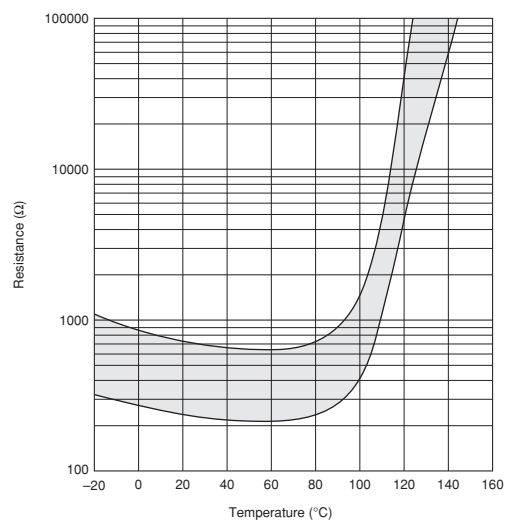

PRF18/21BC471Q Type

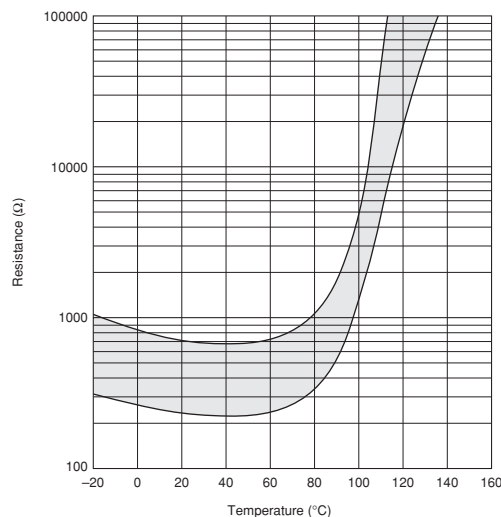

PRF18/21BD471Q Type

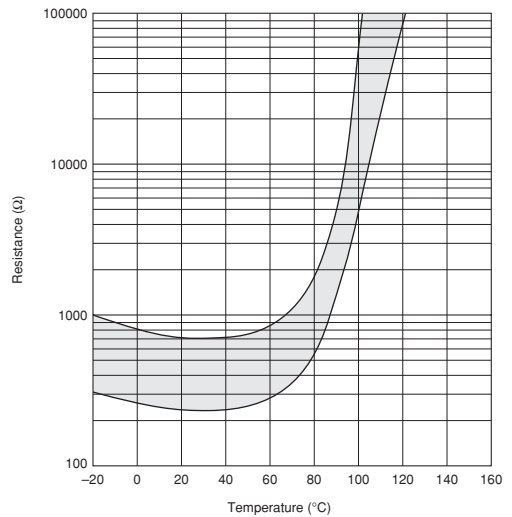


Continued on the following page. ↗

## Overheat Sensing Chip Type (Reference Data)


Continued from the preceding page.

### ■ Resistance - Temperature Characteristics Range


PRF18/21BE471Q Type

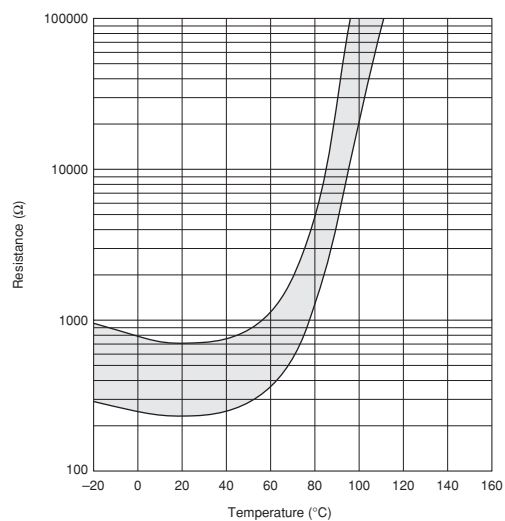

PRF18BF471Q Type

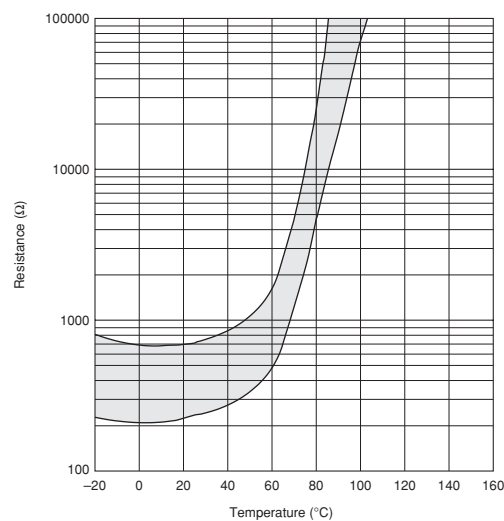

PRF18BG471Q Type

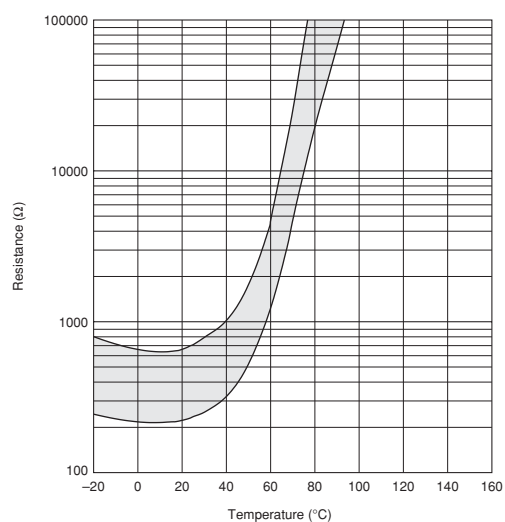

## Overheat Sensing Chip Tight Tolerance Type Specifications and Test Methods

### ■ PRF15\_102 Series

| No.  | Item                         | Rating Value                                                                                                                                                                          | Metheod of Examination                                                                                                                                                                                                                                                                                                                                                                                                                        |      |           |      |   |                            |        |   |                            |        |
|------|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----------|------|---|----------------------------|--------|---|----------------------------|--------|
| 1    | Resistance Value at 25°C     | Within the specified range                                                                                                                                                            | After applying maximum operating voltage for 3 mins. and leaving for 2 hours in 25°C, measured by applying voltage less than DC1.0V.                                                                                                                                                                                                                                                                                                          |      |           |      |   |                            |        |   |                            |        |
| 2    | Vibration                    | <div>· Appearance: No defects or abnormalities</div> <div>· Resistance (R25) change: Less than ±20% (*)</div>                                                                         | Reference standard: IEC 60068-2-6 (2007) <div>· Soldered PTC to PCB (**)</div> <div>· Frequency range: 10 to 55Hz</div> <div>· Amplitude: 1.5mm</div> <div>· Sweep rate: 1 octave/min.</div> <div>· Direction: X-Y-Z (3 direction)</div> <div>· 24 cycles in each axis</div>                                                                                                                                                                  |      |           |      |   |                            |        |   |                            |        |
| 3    | Solderability                | Wetting of soldering area: ≥95%                                                                                                                                                       | Reference standard: IEC 60068-2-58 (2004) <div>· Solder: Sn-3.0Ag-0.5Cu</div> <div>· Solder temp.: 245±5°C</div> <div>· Immersion time: 3±0.3s</div>                                                                                                                                                                                                                                                                                          |      |           |      |   |                            |        |   |                            |        |
| 4    | Resistance to Soldering Heat | <div>· Appearance: No defects or abnormalities</div> <div>· Resistance (R25) change: Less than ±20% (*)</div>                                                                         | Reference standard: IEC 60068-2-58 (2004) <div>[ Solder bath method ]</div> <div>· Solder: Sn-3.0Ag-0.5Cu</div> <div>· Preheat: 150±5°C, 90 to 120s</div> <div>· Solder temp.: 260±5°C</div> <div>· Immersion time: 10±1s</div>                                                                                                                                                                                                               |      |           |      |   |                            |        |   |                            |        |
| 5    | High Temperature Storage     | <div>· Appearance: No defects or abnormalities</div> <div>· Resistance (R25) change: Less than ±20% (*)</div>                                                                         | Reference standard: IEC 60068-2-2 (2007) <div>· Soldered PTC to PCB (**)</div> <div>· (Max. operating temp.)±2°C</div> <div>· 1000+48/-0 hrs.</div>                                                                                                                                                                                                                                                                                           |      |           |      |   |                            |        |   |                            |        |
| 6    | Low Temperature Storage      |                                                                                                                                                                                       | Reference standard: IEC 60068-2-1 (2007) <div>· Soldered PTC to PCB (**)</div> <div>· (Min. operating temp.)±3°C</div> <div>· 1000+48/-0 hrs</div>                                                                                                                                                                                                                                                                                            |      |           |      |   |                            |        |   |                            |        |
| 7    | Damp Heat, Steady State      |                                                                                                                                                                                       | Reference standard: IEC 60068-2-67 (1995) <div>· Soldered PTC to PCB (**)</div> <div>· +85±2°C, 85±5%RH</div> <div>· 1000+48/-0 hrs</div>                                                                                                                                                                                                                                                                                                     |      |           |      |   |                            |        |   |                            |        |
| 8    | Thermal Shock                |                                                                                                                                                                                       | Reference standard: IEC 60068-2-14 (2009) <div>[ Test Na ]</div> <div>· Soldered PTC to PCB (**)</div> <div>· Transport time: &lt;10 sec.</div> <div>· Test condition: See below table</div> <table><tr><th>Step</th><th>Condition</th><th>Time</th></tr><tr><td>1</td><td>(Min. Operating temp.)±3°C</td><td>30min.</td></tr><tr><td>2</td><td>(Max. Operating temp.)±2°C</td><td>30min.</td></tr></table> <div>· Test cycle: 5 cycles</div> | Step | Condition | Time | 1 | (Min. Operating temp.)±3°C | 30min. | 2 | (Max. Operating temp.)±2°C | 30min. |
| Step | Condition                    |                                                                                                                                                                                       | Time                                                                                                                                                                                                                                                                                                                                                                                                                                          |      |           |      |   |                            |        |   |                            |        |
| 1    | (Min. Operating temp.)±3°C   | 30min.                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                               |      |           |      |   |                            |        |   |                            |        |
| 2    | (Max. Operating temp.)±2°C   | 30min.                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                               |      |           |      |   |                            |        |   |                            |        |
| 9    | High Temperature Load        | Reference standard: IEC 60068-2-2 (2007) <div>· Soldered PTC to PCB (**)</div> <div>· (Max. operating temp.)±2°C</div> <div>· Applied max. voltage</div> <div>· 1000+48/-0 hrs.</div> |                                                                                                                                                                                                                                                                                                                                                                                                                                               |      |           |      |   |                            |        |   |                            |        |

\*: The resistance value after the test. It is measured by applying voltage less than DC1.0V after left at  $25 \pm 2^\circ\text{C}$  for 2hrs.

\*\* : Above mentioned soldering is done under the following conditions at our side.

- Glass-Epoxy PC board
- Standard land dimension
- Standard solder paste
- Standard solder profile

Above conditions are mentioned in Notice.

## Overheat Sensing Chip Tight Tolerance Type Specifications and Test Methods

### ■ PRF15\_103R Series

| No.  | Item                         | Rating Value                                                                                                                                                                          | Metheod of Examination                                                                                                                                                                                                                                                                                                                                                                                                                                                      |      |           |      |   |                            |        |   |                            |        |
|------|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----------|------|---|----------------------------|--------|---|----------------------------|--------|
| 1    | Resistance Value at 25°C     | Within the specified range                                                                                                                                                            | After applying maximum operating voltage for 3 mins. and leaving for 2 hours in 25°C, measured by applying voltage less than DC3.0V.                                                                                                                                                                                                                                                                                                                                        |      |           |      |   |                            |        |   |                            |        |
| 2    | Vibration                    | <div>· Appearance: No defects or abnormalities</div> <div>· Resistance (R25) change: Less than ±20% (*)</div>                                                                         | Reference standard: IEC 60068-2-6 (2007) <div>· Soldered PTC to PCB (**)</div> <div>· Frequency range: 10 to 55Hz</div> <div>· Amplitude: 1.5mm</div> <div>· Sweep rate: 1 octave/min.</div> <div>· Direction: X-Y-Z (3 direction)</div> <div>· 24 cycles in each axis</div>                                                                                                                                                                                                |      |           |      |   |                            |        |   |                            |        |
| 3    | Solderability                | Wetting of soldering area: ≥95%                                                                                                                                                       | Reference standard: IEC 60068-2-58 (2004) <div>· Solder: Sn-3.0Ag-0.5Cu</div> <div>· Solder temp.: 245±5°C</div> <div>· Immersion time: 3±0.3s</div>                                                                                                                                                                                                                                                                                                                        |      |           |      |   |                            |        |   |                            |        |
| 4    | Resistance to Soldering Heat | <div>· Appearance: No defects or abnormalities</div> <div>· Resistance (R25) change: Less than ±20% (*)</div>                                                                         | Reference standard: IEC 60068-2-58 (2004) <div>[ Solder bath method ]</div> <div>· Solder: Sn-3.0Ag-0.5Cu</div> <div>· Preheat: 150±5°C, 90 to 120s</div> <div>· Solder temp.: 260±5°C</div> <div>· Immersion time: 10±1s</div>                                                                                                                                                                                                                                             |      |           |      |   |                            |        |   |                            |        |
| 5    | High Temperature Storage     | <div>· Appearance: No defects or abnormalities</div> <div>· Resistance (R25) change: Less than ±20% (*)</div>                                                                         | Reference standard: IEC 60068-2-2 (2007) <div>· Soldered PTC to PCB (**)</div> <div>· (Max. operating temp.)±2°C</div> <div>· 1000+48/-0 hrs.</div>                                                                                                                                                                                                                                                                                                                         |      |           |      |   |                            |        |   |                            |        |
| 6    | Low Temperature Storage      |                                                                                                                                                                                       | Reference standard: IEC 60068-2-1 (2007) <div>· Soldered PTC to PCB (**)</div> <div>· (Min. operating temp.)±3°C</div> <div>· 1000+48/-0 hrs</div>                                                                                                                                                                                                                                                                                                                          |      |           |      |   |                            |        |   |                            |        |
| 7    | Damp Heat, Steady State      |                                                                                                                                                                                       | Reference standard: IEC 60068-2-67 (1995) <div>· Soldered PTC to PCB (**)</div> <div>· +60±2°C, 90±5%RH</div> <div>· 1000+48/-0 hrs</div>                                                                                                                                                                                                                                                                                                                                   |      |           |      |   |                            |        |   |                            |        |
| 8    | Thermal Shock                |                                                                                                                                                                                       | Reference standard: IEC 60068-2-14 (2009) <div>[ Test Na ]</div> <div>· Soldered PTC to PCB (**)</div> <div>· Transport time: &lt;10 sec.</div> <div>· Test condition: See below table</div> <table><thead><tr><th>Step</th><th>Condition</th><th>Time</th></tr></thead><tbody><tr><td>1</td><td>(Min. Operating temp.)±3°C</td><td>30min.</td></tr><tr><td>2</td><td>(Max. Operating temp.)±2°C</td><td>30min.</td></tr></tbody></table> <div>· Test cycle: 5 cycles</div> | Step | Condition | Time | 1 | (Min. Operating temp.)±3°C | 30min. | 2 | (Max. Operating temp.)±2°C | 30min. |
| Step | Condition                    |                                                                                                                                                                                       | Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |      |           |      |   |                            |        |   |                            |        |
| 1    | (Min. Operating temp.)±3°C   | 30min.                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |      |           |      |   |                            |        |   |                            |        |
| 2    | (Max. Operating temp.)±2°C   | 30min.                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |      |           |      |   |                            |        |   |                            |        |
| 9    | High Temperature Load        | Reference standard: IEC 60068-2-2 (2007) <div>· Soldered PTC to PCB (**)</div> <div>· (Max. operating temp.)±2°C</div> <div>· Applied max. voltage</div> <div>· 1000+48/-0 hrs.</div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |      |           |      |   |                            |        |   |                            |        |

\*: The resistance value after the test. It is measured by applying voltage less than DC3.0V after left at  $25 \pm 2^\circ\text{C}$  for 2hrs.

\*\* : Above mentioned soldering is done under the following conditions at our side.

- Glass-Epoxy PC board
- Standard land dimension
- Standard solder paste
- Standard solder profile

Above conditions are mentioned in Notice.

## Overheat Sensing Chip Tight Tolerance Type Specifications and Test Methods

### ■ PRF18\_471R Series

| No.  | Item                         | Rating Value                                                                                                                       | Metheod of Examination                                                                                                                                                                                                                                                                                                                                        |      |           |      |   |         |        |   |          |        |
|------|------------------------------|------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----------|------|---|---------|--------|---|----------|--------|
| 1    | Resistance Value at 25°C     | Within the specified range                                                                                                         | After applying maximum operating voltage for 3 mins. and leaving for 2 hours in 25°C, measured by applying voltage less than DC1.5V. (by a direct current less than 10mA)                                                                                                                                                                                     |      |           |      |   |         |        |   |          |        |
| 2    | Adhesive Strength            | There is no sign of exfoliation on electrode.                                                                                      | Reference standard: IEC 60068-2-21 (2006)<br>· Soldered PTC to PCB (**)<br>· Force: 5.0N<br>· Test time: 10 sec.                                                                                                                                                                                                                                              |      |           |      |   |         |        |   |          |        |
| 3    | Vibration                    | · Appearance: No defects or abnormalities<br>· Resistance (R25) change: Less than ±20% (*)                                         | Reference standard: IEC 60068-2-6 (2007)<br>· Soldered PTC to PCB (**)<br>· Frequency range: 10 to 55Hz<br>· Amplitude: 1.5mm<br>· Sweep rate: 1 octave/min.<br>· Direction: X-Y-Z (3 direction)<br>· 24 cycles in each axis                                                                                                                                  |      |           |      |   |         |        |   |          |        |
| 4    | Solderability                | Wetting of soldering area: ≥95%                                                                                                    | Reference standard: IEC 60068-2-58 (2004)<br>· Solder: Sn-3.0Ag-0.5Cu<br>· Solder temp.: 245±5°C<br>· Immersion time: 3±0.3s                                                                                                                                                                                                                                  |      |           |      |   |         |        |   |          |        |
| 5    | Resistance to Soldering Heat | · Appearance: No defects or abnormalities<br>· Resistance (R25) change: Less than ±20% (*)                                         | Reference standard: IEC 60068-2-58 (2004)<br>[ Solder bath method ]<br>· Solder: Sn-3.0Ag-0.5Cu<br>· Preheat: 150±5°C, 90 to 120s<br>· Solder temp.: 260±5°C<br>· Immersion time: 10±1s                                                                                                                                                                       |      |           |      |   |         |        |   |          |        |
| 6    | High Temperature Storage     | · Appearance: No defects or abnormalities<br>· Resistance (R25) change: Less than ±20% (*)                                         | Reference standard: IEC 60068-2-2 (2007)<br>· Soldered PTC to PCB (**)<br>· +150±2°C<br>· 1000+48/-0 hrs.                                                                                                                                                                                                                                                     |      |           |      |   |         |        |   |          |        |
| 7    | Low Temperature Storage      |                                                                                                                                    | Reference standard: IEC 60068-2-1 (2007)<br>· Soldered PTC to PCB (**)<br>· -20±3°C<br>· 1000+48/-0 hrs                                                                                                                                                                                                                                                       |      |           |      |   |         |        |   |          |        |
| 8    | Damp Heat, Steady State      |                                                                                                                                    | Reference standard: IEC 60068-2-67 (1995)<br>· Soldered PTC to PCB (**)<br>· +40±2°C, 90±5%RH<br>· 500+24/-0 hrs                                                                                                                                                                                                                                              |      |           |      |   |         |        |   |          |        |
| 9    | Thermal Shock                |                                                                                                                                    | Reference standard: IEC 60068-2-14 (2009)<br>[ Test Na ]<br>· Soldered PTC to PCB (**)<br>· Transport time: <10 sec.<br>· Test condition: See below table <table><tr><th>Step</th><th>Condition</th><th>Time</th></tr><tr><td>1</td><td>-20±3°C</td><td>30min.</td></tr><tr><td>2</td><td>+150±2°C</td><td>30min.</td></tr></table><br>· Test cycle: 5 cycles | Step | Condition | Time | 1 | -20±3°C | 30min. | 2 | +150±2°C | 30min. |
| Step | Condition                    |                                                                                                                                    | Time                                                                                                                                                                                                                                                                                                                                                          |      |           |      |   |         |        |   |          |        |
| 1    | -20±3°C                      | 30min.                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                               |      |           |      |   |         |        |   |          |        |
| 2    | +150±2°C                     | 30min.                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                               |      |           |      |   |         |        |   |          |        |
| 10   | High Temperature Load        | Reference standard: IEC 60068-2-2 (2007)<br>· Soldered PTC to PCB (**)<br>· +85±2°C<br>· Applied max. voltage<br>· 1000+48/-0 hrs. |                                                                                                                                                                                                                                                                                                                                                               |      |           |      |   |         |        |   |          |        |

\*: The resistance value after the test. It is measured by applying voltage less than DC1.5V (by a direct current less than 10mA) after left at 25±2°C for 2hrs.

\*\* : Above mentioned soldering is done under the following conditions at our side.

- Glass-Epoxy PC board
- Standard land dimension
- Standard solder paste
- Standard solder profile

Above conditions are mentioned in Notice.

## Overheat Sensing Chip Type Specifications and Test Methods

### ■ PRF18/21\_471Q Series

| No.  | Item                         | Rating Value                                                                                                                       | Metheod of Examination                                                                                                                                                                                                                                                                                                                                        |      |           |      |   |         |        |   |          |        |
|------|------------------------------|------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----------|------|---|---------|--------|---|----------|--------|
| 1    | Resistance Value at 25°C     | Within the specified range                                                                                                         | After applying maximum operating voltage for 3 mins. and leaving for 2 hours in 25°C, measured by applying voltage less than DC1.5V. (by a direct current less than 10mA)                                                                                                                                                                                     |      |           |      |   |         |        |   |          |        |
| 2    | Adhesive Strength            | There is no sign of exfoliation on electrode.                                                                                      | Reference standard: IEC 60068-2-21 (2006)<br>· Soldered PTC to PCB (**)<br>· Force: 5.0N<br>· Test time: 10 sec.                                                                                                                                                                                                                                              |      |           |      |   |         |        |   |          |        |
| 3    | Vibration                    | · Appearance: No defects or abnormalities<br>· Resistance (R25) change: Less than ±20% (*)                                         | Reference standard: IEC 60068-2-6 (2007)<br>· Soldered PTC to PCB (**)<br>· Frequency range: 10 to 55Hz<br>· Amplitude: 1.5mm<br>· Sweep rate: 1 octave/min.<br>· Direction: X-Y-Z (3 direction)<br>· 24 cycles in each axis                                                                                                                                  |      |           |      |   |         |        |   |          |        |
| 4    | Solderability                | Wetting of soldering area: ≥95%                                                                                                    | Reference standard: IEC 60068-2-58 (2004)<br>· Solder: Sn-3.0Ag-0.5Cu<br>· Solder temp.: 245±5°C<br>· Immersion time: 3±0.3s                                                                                                                                                                                                                                  |      |           |      |   |         |        |   |          |        |
| 5    | Resistance to Soldering Heat | · Appearance: No defects or abnormalities<br>· Resistance (R25) change: Less than ±20% (*)                                         | Reference standard: IEC 60068-2-58 (2004)<br>[ Solder bath method ]<br>· Solder: Sn-3.0Ag-0.5Cu<br>· Preheat: 150±5°C, 90 to 120s<br>· Solder temp.: 260±5°C<br>· Immersion time: 10±1s                                                                                                                                                                       |      |           |      |   |         |        |   |          |        |
| 6    | High Temperature Storage     | · Appearance: No defects or abnormalities<br>· Resistance (R25) change: Less than ±20% (*)                                         | Reference standard: IEC 60068-2-2 (2007)<br>· Soldered PTC to PCB (**)<br>· +150±2°C<br>· 1000+48/-0 hrs.                                                                                                                                                                                                                                                     |      |           |      |   |         |        |   |          |        |
| 7    | Low Temperature Storage      |                                                                                                                                    | Reference standard: IEC 60068-2-1 (2007)<br>· Soldered PTC to PCB (**)<br>· -20±3°C<br>· 1000+48/-0 hrs                                                                                                                                                                                                                                                       |      |           |      |   |         |        |   |          |        |
| 8    | Damp Heat, Steady State      |                                                                                                                                    | Reference standard: IEC 60068-2-67 (1995)<br>· Soldered PTC to PCB (**)<br>· +40±2°C, 90±5%RH<br>· 500+24/-0 hrs                                                                                                                                                                                                                                              |      |           |      |   |         |        |   |          |        |
| 9    | Thermal Shock                |                                                                                                                                    | Reference standard: IEC 60068-2-14 (2009)<br>[ Test Na ]<br>· Soldered PTC to PCB (**)<br>· Transport time: <10 sec.<br>· Test condition: See below table <table><tr><th>Step</th><th>Condition</th><th>Time</th></tr><tr><td>1</td><td>-20±3°C</td><td>30min.</td></tr><tr><td>2</td><td>+150±2°C</td><td>30min.</td></tr></table><br>· Test cycle: 5 cycles | Step | Condition | Time | 1 | -20±3°C | 30min. | 2 | +150±2°C | 30min. |
| Step | Condition                    |                                                                                                                                    | Time                                                                                                                                                                                                                                                                                                                                                          |      |           |      |   |         |        |   |          |        |
| 1    | -20±3°C                      | 30min.                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                               |      |           |      |   |         |        |   |          |        |
| 2    | +150±2°C                     | 30min.                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                               |      |           |      |   |         |        |   |          |        |
| 10   | High Temperature Load        | Reference standard: IEC 60068-2-2 (2007)<br>· Soldered PTC to PCB (**)<br>· +85±2°C<br>· Applied max. voltage<br>· 1000+48/-0 hrs. |                                                                                                                                                                                                                                                                                                                                                               |      |           |      |   |         |        |   |          |        |

\*: The resistance value after the test. It is measured by applying voltage less than DC1.5V (by a direct current less than 10mA) after left at 25±2°C for 2hrs.

\*\* : Above mentioned soldering is done under the following conditions at our side.

- Glass-Epoxy PC board
- Standard land dimension
- Standard solder paste
- Standard solder profile

Above conditions are mentioned in Notice.

# POSISTOR® for Circuit Protection



## Overheat Sensing Lead Type



"PTFM Series" is a screw clamp type temperature sensor which has been developed for sensing the temperature of Transistors, Thyristors, stereo main amplifiers, and other devices having risk of overheat.

"PTFL Series" is a popular lead type temperature sensor which is suitable for use as an air temperature sensing.

"PTFM\_S" Series is a screw clamp type temperature sensor which have high environmental reliability. It is certified by UL/cUL/VDE.

### ■ Features


1. PTFM\_S Series is fixed easily to objects because of a screw clamp type.
2. Compact and light design as well as excellent thermal response.
3. Contactless operation provides a prolonged service life, yet permits noiseless operation.
4. The operating point of "POSISTOR" is set on the steepest point along the resistance-temperature characteristic curve, thus performing the overheat protective operation securely.
5. PTFM Series and PTFL Series have same resistance-temperature characteristics, providing a selection depending on the mounting method.
6. PTFM\_S Series is certified by UL/cUL/VDE.  
It is suitable for a powersupply, etc, required the safety standard.

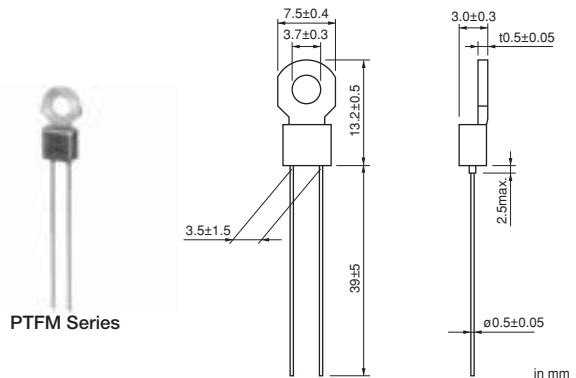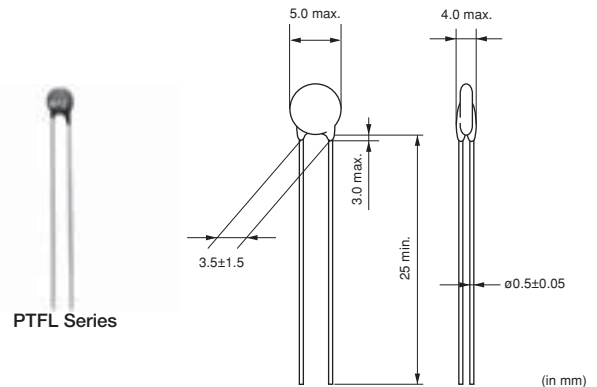

| Part Number<br>(Lead Type) | Part Number<br>(with Lug-Terminal Type) | Max. Voltage<br>(V) | Sensing Temp. (TS)<br>(°C) | Resistance Value<br>at 25°C (max.)<br>(ohm) | Resistance Value<br>(TS-10°C) (max.)<br>(ohm) | Resistance Value<br>(TS°C) (min.)<br>(ohm) |
|----------------------------|-----------------------------------------|---------------------|----------------------------|---------------------------------------------|-----------------------------------------------|--------------------------------------------|
| PTFL04BH471Q2N34B0         | PTFM04BH471Q2N34BS                      | 16                  | 60                         | 100                                         | 330                                           | 470                                        |
| PTFL04BG471Q2N34B0         | PTFM04BG471Q2N34BS                      | 16                  | 70                         | 100                                         | 330                                           | 470                                        |
| PTFL04BF471Q2N34B0         | PTFM04BF471Q2N34BS                      | 16                  | 80                         | 100                                         | 330                                           | 470                                        |
| PTFL04BE471Q2N34B0         | PTFM04BE471Q2N34BS                      | 16                  | 90                         | 100                                         | 330                                           | 470                                        |
| PTFL04BD471Q2N34B0         | PTFM04BD471Q2N34BS                      | 16                  | 100                        | 100                                         | 330                                           | 470                                        |
| PTFL04BC471Q2N34B0         | PTFM04BC471Q2N34BS                      | 16                  | 110                        | 100                                         | 330                                           | 470                                        |
| PTFL04BB471Q2N34B0         | PTFM04BB471Q2N34BS                      | 16                  | 120                        | 100                                         | 330                                           | 470                                        |
| PTFL04BH222Q2N34B0         | PTFM04BH222Q2N34BS                      | 16                  | 60                         | 330                                         | 1.5k                                          | 2.2k                                       |
| PTFL04BG222Q2N34B0         | PTFM04BG222Q2N34BS                      | 16                  | 70                         | 330                                         | 1.5k                                          | 2.2k                                       |
| PTFL04BF222Q2N34B0         | PTFM04BF222Q2N34BS                      | 16                  | 80                         | 330                                         | 1.5k                                          | 2.2k                                       |
| PTFL04BE222Q2N34B0         | PTFM04BE222Q2N34BS                      | 16                  | 90                         | 330                                         | 1.5k                                          | 2.2k                                       |
| PTFL04BD222Q2N34B0         | PTFM04BD222Q2N34BS                      | 16                  | 100                        | 330                                         | 1.5k                                          | 2.2k                                       |
| PTFL04BC222Q2N34B0         | PTFM04BC222Q2N34BS                      | 16                  | 110                        | 330                                         | 1.5k                                          | 2.2k                                       |
| PTFL04BB222Q2N34B0         | PTFM04BB222Q2N34BS                      | 16                  | 120                        | 330                                         | 1.5k                                          | 2.2k                                       |


Operating temperature range is -10 to TS+10°C.

## ■ Resistance - Temperature Characteristics

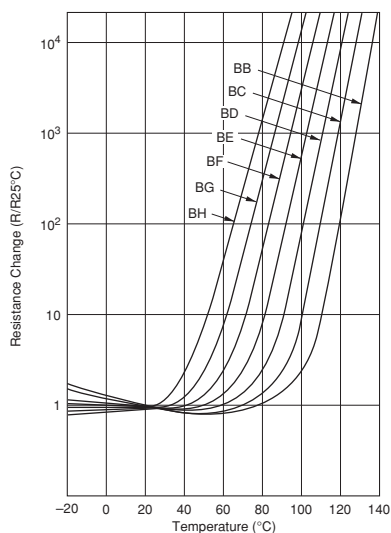


## ■ Example of Thermal Response Time

### Operating Time of POSISTOR®

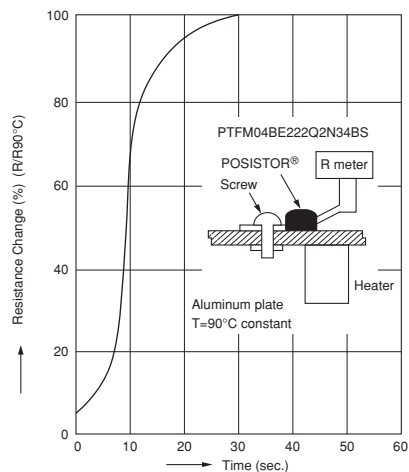


Relation between resistance change and time after POSISTOR® PTFM04BE222Q2N34BS is installed on the part heated at a constant temperature of 90°C (3mm thick alumin sheet) is shown in the figure above.

## ■ Overheat Protection Circuit

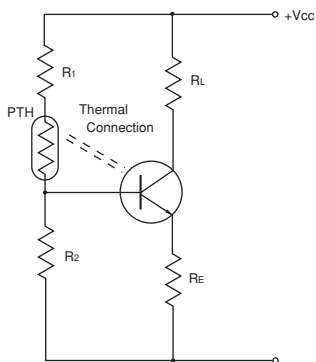


## ■ Overheat Sensing Circuit

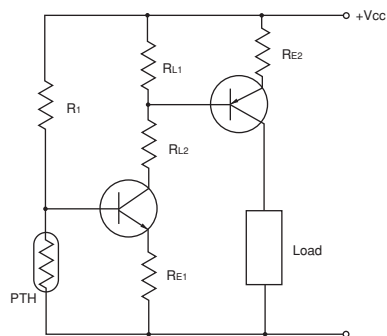


## ■ Resistance - Temperature Characteristics Range (Ref. Only)

### PTF\_04BH471Q Type

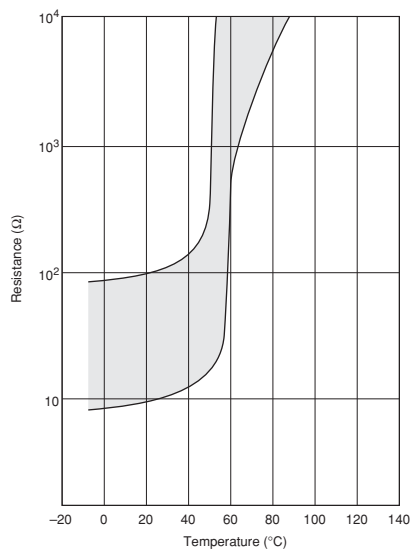

### PTF\_04BG471Q Type

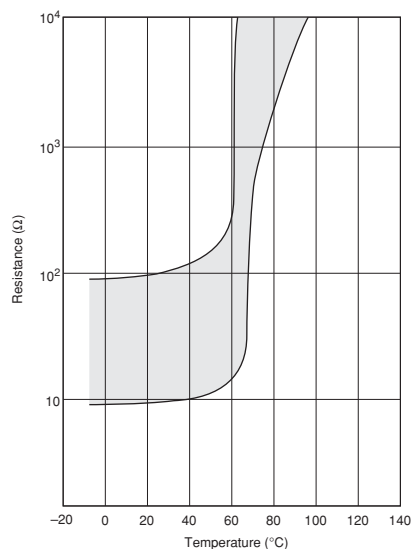


Continued on the following page. ➤


Continued from the preceding page.

## ■ Resistance - Temperature Characteristics Range (Ref. Only)


PTF\_04BF471Q Type

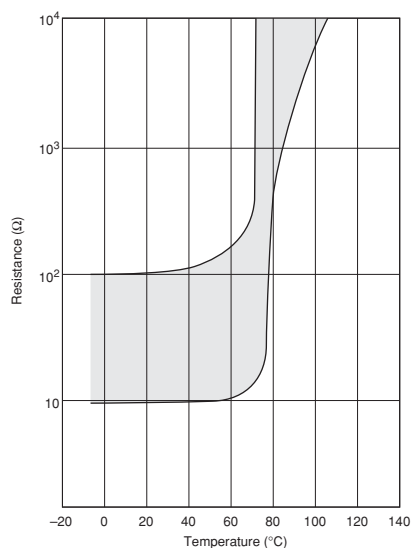


PTF\_04BE471Q Type

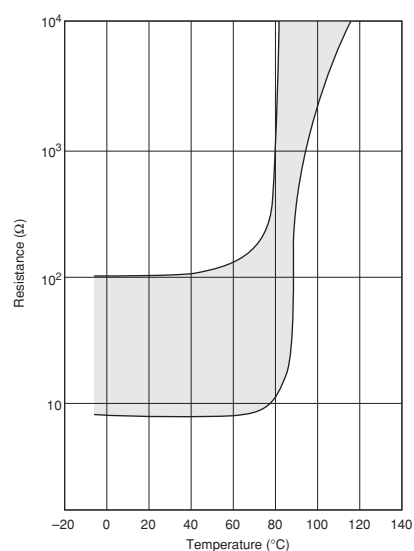


PTF\_04BD471Q Type

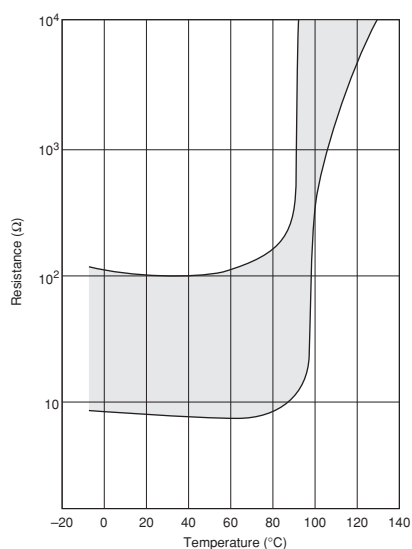


PTF\_04BC471Q Type

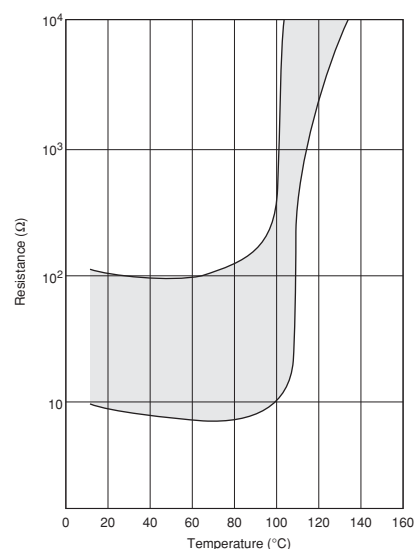

PTF\_04BB471Q Type

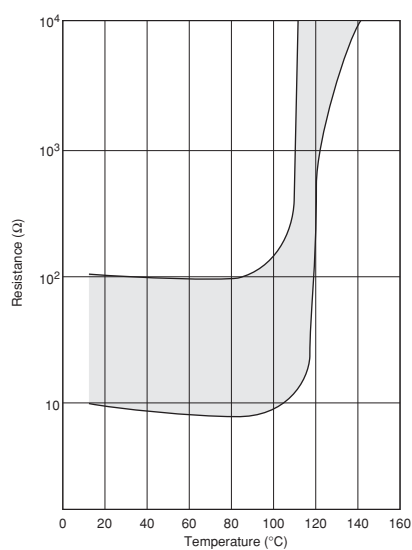

PTF\_04BH222Q Type

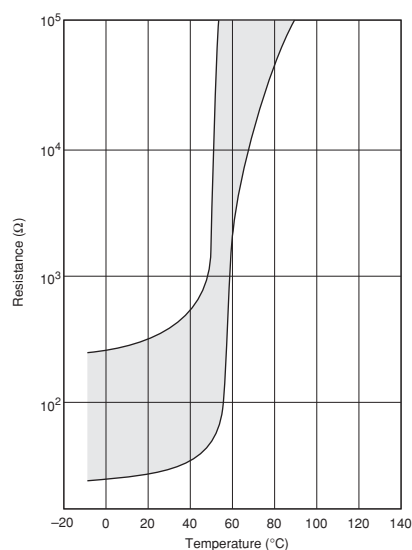


Continued on the following page. ➤


Continued from the preceding page.

## ■ Resistance - Temperature Characteristics Range (Ref. Only)


PTF\_04BG222Q Type

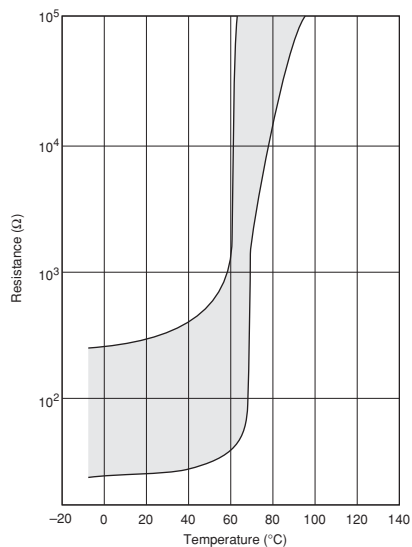


PTF\_04BF222Q Type

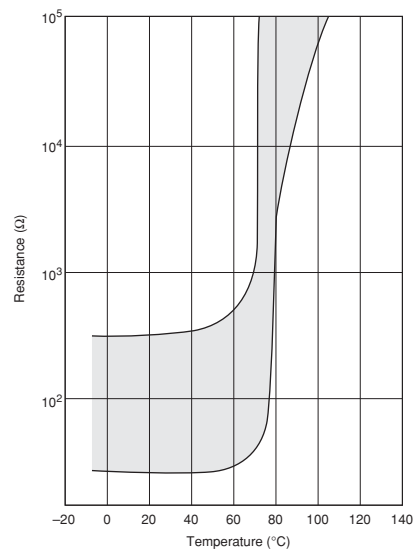


PTF\_04BE222Q Type

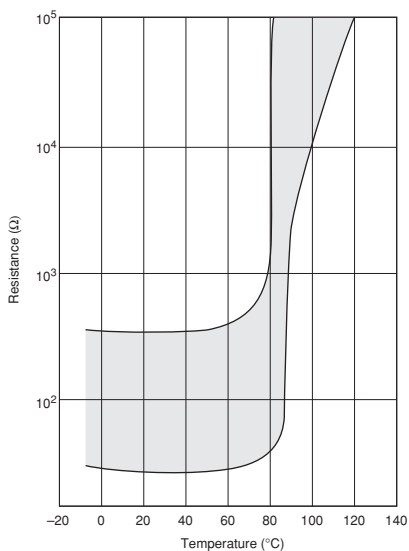


PTF\_04BD222Q Type

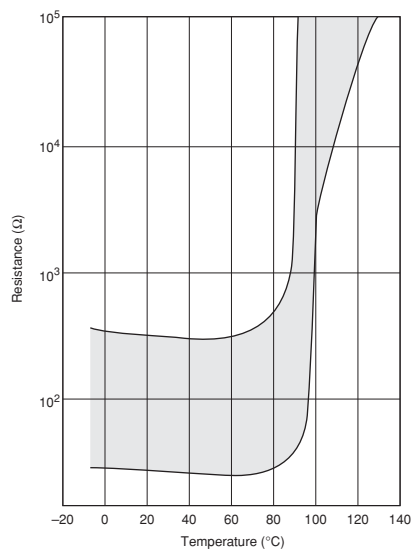


PTF\_04BC222Q Type

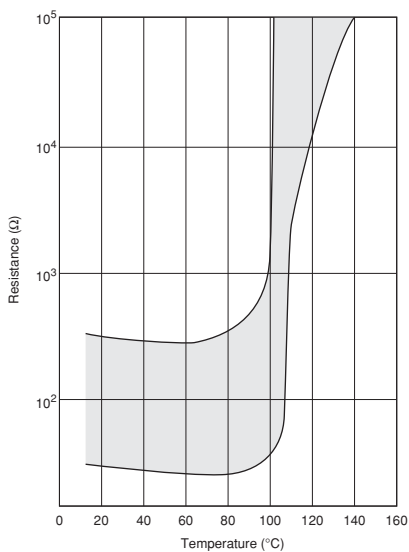

PTF\_04BB222Q Type

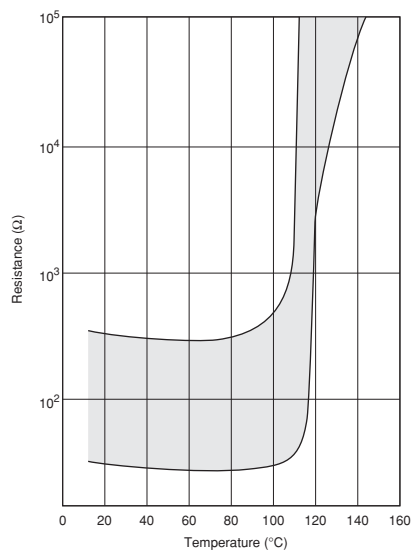

## Temperature Sensor Lead Type Specifications and Test Methods

| No.    | Item                                   | Rating Value                                                                                                                                      | Method of Examination                                                                                                                                                                                                                                                                                                                                                                                                                                                      |        |       |      |       |      |       |
|--------|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-------|------|-------|------|-------|
| 1      | Resistance Value                       | Satisfies specification                                                                                                                           | Resistance value is measured by applying voltage under 1.5Vdc (by a direct current of less than 10mA) in a silicone oil vessel.                                                                                                                                                                                                                                                                                                                                            |        |       |      |       |      |       |
| 2      | Withstanding Voltage                   | No problem                                                                                                                                        | We apply AC voltage 120% that of the maximum voltage to POSISTOR® by raising voltage gradually for 180±5 seconds at 25°C. (A protective resistor is to be connected in series, and the inrush current through POSISTOR® must be limited below max. rated value.)                                                                                                                                                                                                           |        |       |      |       |      |       |
| 3      | Tensile Strength of Lead Wire Terminal | No damage                                                                                                                                         | The load is gradually applied to each terminal of POSISTOR® until 9.80N in the axial-direction with fixing POSISTOR®'s body itself and this load is kept for 10 seconds.                                                                                                                                                                                                                                                                                                   |        |       |      |       |      |       |
| 4      | Bending Strength of Lead Wire Terminal | Lead wire does not come off.                                                                                                                      | <p>POSISTOR® is held so that it is perpendicular to the lead wire with the following load hanging in the axial direction of the lead wire. The lead wire is slowly bent to 90° and returned; then it is slowly bent in the opposite direction and returned to original state. (Above mentioned procedure is done slowly with one cycle.)</p> <table><tr><th>Series</th><th>Force</th></tr><tr><td>PTFL</td><td>2.45N</td></tr><tr><td>PTFM</td><td>4.90N</td></tr></table> | Series | Force | PTFL | 2.45N | PTFM | 4.90N |
| Series | Force                                  |                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |        |       |      |       |      |       |
| PTFL   | 2.45N                                  |                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |        |       |      |       |      |       |
| PTFM   | 4.90N                                  |                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |        |       |      |       |      |       |
| 5      | Solderability                          | Solder is applied around the lead wire covering 3/4 or more of the circumference without gap in the axial-direction.                              | The lead wire of POSISTOR® is soaked in a Isopropyl Alcohol (JIS K 8839) or ethanol (JIS K 8101) solution (about 25wt%) of colophony (JIS K 5902) for 5-10 sec. And, each lead wire is soaked in molten solder (JIS Z 3282 H60A) at 235±5°C from the bottom to a point of 2.0-2.5mm for 2±0.5 seconds.                                                                                                                                                                     |        |       |      |       |      |       |
| 6      | Terminal Durability of Soldering       | $\Delta R/R_{25} \leq \pm 15\%$                                                                                                                   | The lead wire of POSISTOR® is soaked in molten solder (JIS Z 3282 H60A) at 350±10°C from the bottom to a point of 2.0-2.5 mm for 3.5±0.5 seconds. And, after the device is left at room temperature (25°C) for 24±4 hours, the resistance is measured.                                                                                                                                                                                                                     |        |       |      |       |      |       |
| 7      | Damp Heat                              | $\Delta R/R_{25} \leq \pm 20\%$                                                                                                                   | POSISTOR® is set in an environmental chamber at 40±2°C and 90-95% humidity for 500±4 hours. And after the device is left at room temperature (25°C) for one hour, the resistance measurement is performed.                                                                                                                                                                                                                                                                 |        |       |      |       |      |       |
| 8      | High Temperature Load                  | $\Delta R/R_{25} \leq \pm 20\%$ <div><p>Test circuit</p></div> | <p>POSISTOR® is set in an environmental chamber at 85±3°C with maximum voltage applied for 1.5 hours and then is left without voltage applied for 0.5 hours. This cycle is repeated for 1000±10 hours, and after the device is left at room temperature (25°C) for one hour, the resistance measurement is performed. (A protective resistor is to be connected in series and the inrush current through POSISTOR® must be limited below max. rated value.)</p>            |        |       |      |       |      |       |

## ⚠Caution/Notice

### ■ ⚠Caution (Storage and Operating Condition)

This product is designed for application in an ordinary environment (normal room temperature, humidity and atmospheric pressure). Do not use under the following conditions because all of these factors can deteriorate the characteristics or cause product failure and burn-out.

1. Corrosive gas or deoxidizing gas (Chlorine gas, Hydrogen sulfide gas, Ammonia gas, Sulfuric acid gas, Nitric oxide gas, etc.)
2. Volatile or flammable gas
3. Dusty conditions
4. Under vacuum, or under high or low pressure
5. Wet or humid conditions
6. Places with salt water, oils, chemical liquids or organic solvents
7. Strong vibrations
8. Other places where similar hazardous conditions exist

### ■ ⚠Caution (Other)

Be sure to provide an appropriate fail-safe function on your product to prevent secondary damage that may be caused by the abnormal function or the failure of our product.

### ■ Notice (Storage and Operating Condition)

To keep solderability of product from declining, the following storage conditions are recommended.

1. Storage condition:
  - Temperature -10 to +40 degrees C
  - Humidity less than 75%RH (not dewing condition)
2. Storage term:
  - Use this product within 6 months after delivery by first-in and first-out stocking system.
3. Handling after unpacking:
  - After unpacking, promptly reseal this product or store it in a sealed container with a drying agent.
4. Storage place:
  - Do not store this product in corrosive gas (Sulfuric acid, Chlorine, etc.) or in direct sunlight.

### ■ Notice (Soldering and Mounting)

#### PTGL Series

When the lead of this product is soldered, observe the following points to avoid the decline of element characteristics or break-down of the element.

1. Use rosin type flux or non-activated flux
2. Do not dip the body into flux (flux should be coated to lead wire only for soldering).
3. Be sure that preheating does not melt the soldering of this product.

### ■ Notice (Soldering and Mounting)

#### PTFL/PTFM Series

1. PTFM Series is to be screwed beside the Power-Transistor on the radiative plate.
2. If PTFL Series is to be mounted with thermal cement, the cement should not be of the Cyano Acrylate family.
3. Please bend the lead wire far from the root of the body and do not apply force to the lead wire of the product.
4. When the lead of this product is soldered, observe the following points to avoid the decline of element characteristics or break-down of the element.
  - (1) Use rosin type flux or non-activated flux.
  - (2) Do not dip the body into flux.  
(Flux should be coated to lead wire only for soldering.)
  - (3) Be sure that preheating does not melt the soldering of this product.

## ⚠Caution/Notice

### ■ Notice (Soldering and Mounting) PRG15 Series

#### 1. Solder and Flux

##### (1) Solder Paste

Use solder paste Sn:Pb=63:37wt%.

For your reference, we are using

63Sn/37Pb RMA9086 90-3-M18,

manufactured by Alpha Metals Japan Ltd.

96.5Sn/3.0Ag/0.5Cu M705-GRN360-K2-V,

manufactured by Senju Metal Industry Co., LTD for any Internal tests of this product.

##### (2) Flux

Use rosin type flux in soldering process.

If below flux is used, some problems might be caused in the product characteristics and reliability.

Please do not use below flux.

- Strong acidic flux (with halide content exceeding 0.2wt%).

- Water-soluble flux

(\*Water-soluble flux can be defined as non rosin type flux including wash-type flux and non-wash-type flux.)

#### 2. Cleaning Conditions and Drying

To remove the flux after soldering, observe the following points in order to avoid deterioration of the characteristics or any change to the external electrodes quality.

##### (1) Cleaning Conditions

| Solvent    | Dipping Cleaning                                                            | Ultrasonic Cleaning                                               |
|------------|-----------------------------------------------------------------------------|-------------------------------------------------------------------|
| 2-propanol | Less than 5 minutes at room temp.<br>or<br>Less than 2 minutes at 40°C max. | Less than 1 minute<br>20W/L Frequency of several 10kHz to 100kHz. |

A sufficient cleaning should be applied to remove flux completely.

##### (2) Drying

After cleaning, promptly dry this product.


#### 3. Soldering Conditions

In your mounting process, observe the following points in order to avoid deterioration of the characteristics or destruction of this product. The mounting quality of this product may also be affected by the mounting conditions, shown in the points below.

This product is for reflow soldering only. Flow soldering should not be allowed.

##### (1) Printing Conditions of Solder Paste

- Standard thickness of solder paste printing should be from 0.10 to 0.15 mm.
- After soldering, the solder fillet should be a height from 0.15 mm to the thickness of this product (see the figure at right).
- Too much solder gives too strong mechanical stress to this product. Such stress may cause cracking or other mechanical damage. Also, it can destroy the electrical performance of this product.

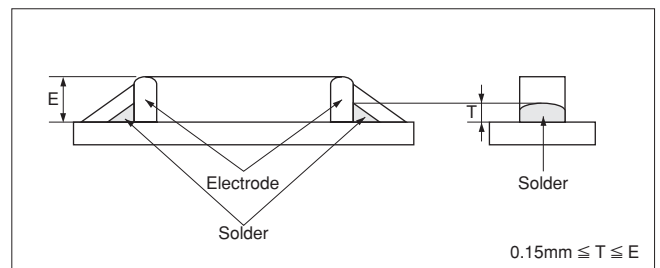

Continued on the following page. ↗


## ⚠Caution/Notice

Continued from the preceding page.

### (2) Reflow soldering conditions

The following figure and table show our recommended reflow profile.

- (a) Insufficient preheating may cause a crack on ceramic body. The temperature difference between preheat and peak should be control within 100°C to prevent this.
- (b) The excessive soldering conditions may cause dissolution of metallization or deterioration of solder-wetting on the external electrode.
- (c) Rapid cooling by dipping in solvent or by other means is not recommended.
- (d) Please evaluate it on your condition if you will do mounting using not applying condition to the above-mentioned.

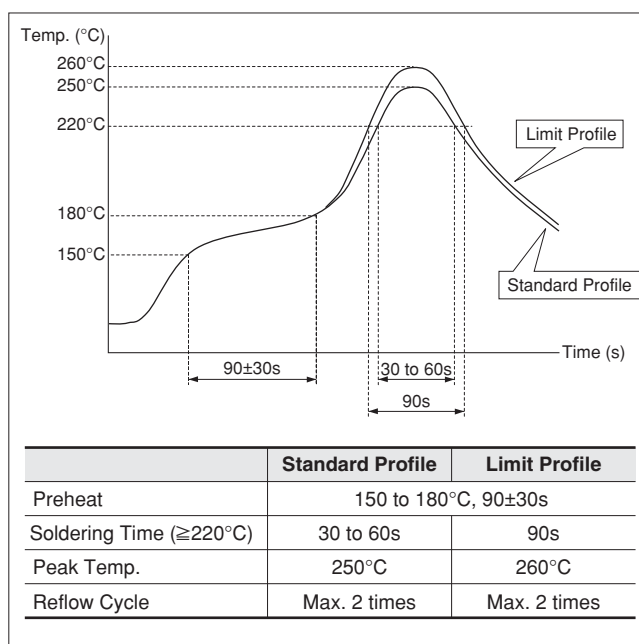

- (3) There may be a risk of unexpected failures (tombstone, insufficient solder-wetting, etc.) in the mounting process, caused by the mounting conditions. Please make sure that this product is correctly mounted under specified mounting conditions.

## ⚠Caution/Notice

### ■ Notice (Soldering and Mounting) PRG18/21 Series

#### 1. Solder and Flux

##### (1) Solder Paste

Use solder paste Sn:Pb=63:37wt%.

For your reference, we are using

63Sn/37Pb RMA9086 90-3-M18,

manufactured by Alpha Metals Japan Ltd.

96.5Sn/3.0Ag/0.5Cu M705-GRN360-K2-V,

manufactured by Senju Metal Industry Co., LTD for any internal tests of this product.

##### (2) Flux

Use rosin type flux in the soldering process.

If the flux below is used, some problems might be caused in the product characteristics and reliability.

Please do not use these types of flux.

- Strong acidic flux (with halide content exceeding 0.2wt%).

- Water-soluble flux

(\*Water-soluble flux can be defined as non-rosin type flux including wash-type flux and non-wash-type flux.)

#### 2. Cleaning Conditions

To remove the flux after soldering, observe the following points in order to avoid deterioration of the characteristics or any change to the external electrodes' quality.

| Solvent    | Dipping Cleaning                                                            | Ultrasonic Cleaning                                               | Drying                                     |
|------------|-----------------------------------------------------------------------------|-------------------------------------------------------------------|--------------------------------------------|
| 2-propanol | Less than 5 minutes at room temp.<br>or<br>Less than 2 minutes at 40°C max. | Less than 1 minute<br>20W/L Frequency of several 10kHz to 100kHz. | After cleaning, promptly dry this product. |

A sufficient cleaning should be applied to remove flux completely.

#### 3. Soldering Conditions

In your mounting process, observe the following points in order to avoid deterioration of the characteristics or destruction of this product. The mounting quality of this product may also be affected by the mounting conditions, shown in the points below.


This product is for reflow soldering only. Flow soldering should not be allowed.

##### (1) Printing Conditions of Solder Paste

(a) Standard thickness of solder paste printing should be from 0.15 to 0.20 mm.

(b) After soldering, the solder fillet should be a height from 0.2 mm to the thickness of this product (see the figure at right).

(c) Too much solder result in excessive mechanical stress to this product. Such stress may cause cracking or other mechanical damage. Also, it can destroy the electrical performance of this product.

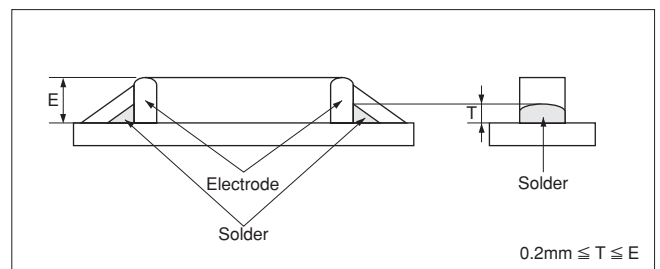

Continued on the following page. ➤


## ⚠Caution/Notice

Continued from the preceding page.

### (2) Allowable Soldering Temperature and Time

- Solder within the temperature and time combinations, indicated by the slanted lines in the graphs at right.
- Excessive soldering conditions may cause dissolution of metallization or deterioration of solder-wetting on the external electrode.
- In the case of repeated soldering, the accumulated soldering time should be within the range shown at right. (For example, Reflow peak temperature: 260°C, twice → The accumulated soldering time at 260°C is within 15sec.)


Allowable Reflow Soldering Temp. and Time

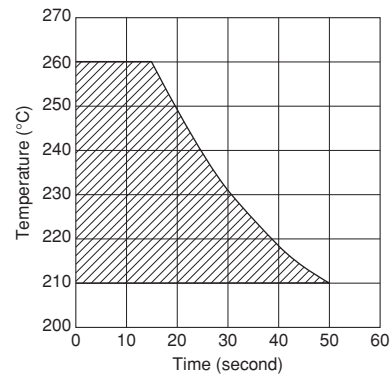

### (3) Standard Temperature Profile for Soldering

- Insufficient preheating may cause a crack on the ceramic body. The difference between preheating temperature and maximum temperature in the profile should be 100°C.
- Rapid cooling by dipping in solvent or by other means is not recommended.

Reflow Soldering Conditions

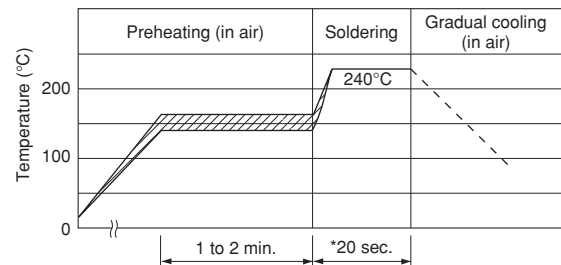

Preheating: 150±10°C, 1 to 2 minutes  
Soldering: 240°C, 20 sec.

\* In the case of repeated soldering, the accumulated soldering time should be within the range shown in "(2) Allowable Soldering Temperature and Time."

- There may be a risk of unexpected failures (tombstone, insufficient solder-wetting, etc.) in the mounting process, caused by the mounting conditions. Please make sure that this product is correctly mounted under the specified mounting conditions.

## ⚠Caution/Notice

### ■ Notice (Soldering and Mounting) PRF15\_102R Series

#### 1. Solder and Flux

##### (1) Solder Paste

Use solder paste Sn:Pb=63:37wt%.

For your reference, we are using

63Sn/37Pb RMA9086 90-3-M18,

manufactured by Alpha Metals Japan Ltd.

96.5Sn/3.0Ag/0.5Cu M705-GRN360-K2-V,

manufactured by Senju Metal Industry Co., LTD for any Internal tests of this product.

##### (2) Flux

Use rosin type flux in soldering process.

If below flux is used, some problems might be caused in the product characteristics and reliability.

Please do not use below flux.

- Strong acidic flux (with halide content exceeding 0.2wt%).

- Water-soluble flux

(\*Water-soluble flux can be defined as non rosin type flux including wash-type flux and non-wash-type flux.)

#### 2. Cleaning Conditions and Drying

To remove the flux after soldering, observe the following points in order to avoid deterioration of the characteristics or any change to the external electrodes quality.

##### (1) Cleaning Conditions

| Solvent    | Dipping Cleaning                                                            | Ultrasonic Cleaning                                               |
|------------|-----------------------------------------------------------------------------|-------------------------------------------------------------------|
| 2-propanol | Less than 5 minutes at room temp.<br>or<br>Less than 2 minutes at 40°C max. | Less than 1 minute<br>20W/L Frequency of several 10kHz to 100kHz. |

A sufficient cleaning should be applied to remove flux completely.

##### (2) Drying

After cleaning, promptly dry this product.


#### 3. Soldering Conditions

In your mounting process, observe the following points in order to avoid deterioration of the characteristics or destruction of this product. The mounting quality of this product may also be affected by the mounting conditions, shown in the points below.

This product is for reflow soldering only. Flow soldering should not be allowed.

##### (1) Printing Conditions of Solder Paste

- Standard thickness of solder paste printing should be from 0.10 to 0.15 mm.
- After soldering, the solder fillet should be a height from 0.15 mm to the thickness of this product (see the figure at right).
- Too much solder gives too strong mechanical stress to this product. Such stress may cause cracking or other mechanical damage. Also, it can destroy the electrical performance of this product.

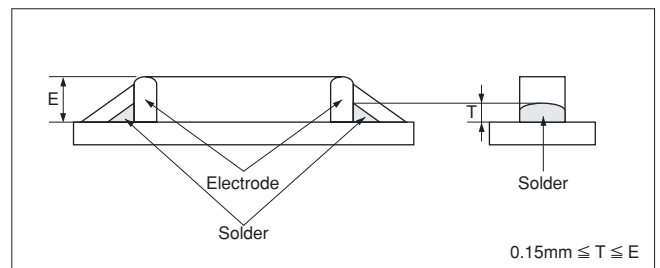

Continued on the following page. ↗


## ⚠Caution/Notice

☐ Continued from the preceding page.

### (2) Reflow soldering conditions

The following figure and table show our recommended reflow profile.

- (a) Insufficient preheating may cause a crack on ceramic body. The temperature difference between preheat and peak should be control within 100°C to prevent this.
- (b) The excessive soldering conditions may cause dissolution of metallization or deterioration of solder-wetting on the external electrode.
- (c) Rapid cooling by dipping in solvent or by other means is not recommended.
- (d) Please evaluate it on your condition if you will do mounting using not applying condition to the above-mentioned.

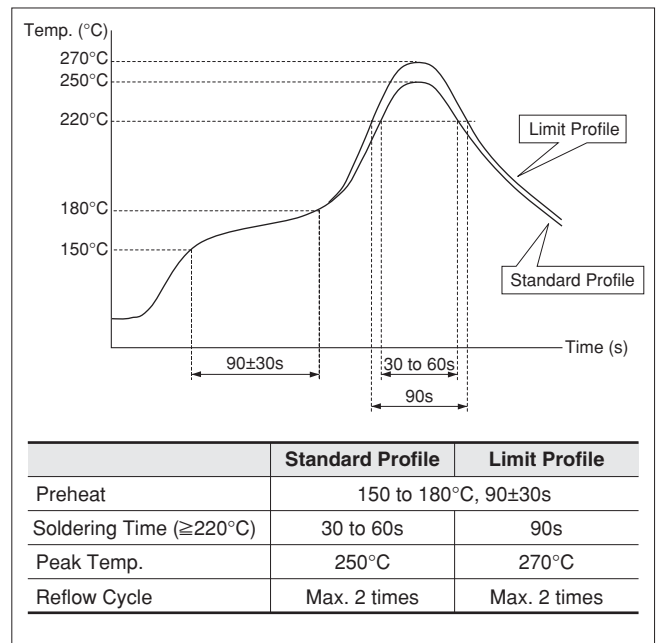

- (3) There may be a risk of unexpected failures (tombstone, insufficient solder-wetting, etc.) in the mounting process, caused by the mounting conditions. Please make sure that this product is correctly mounted under specified mounting conditions.

## ⚠Caution/Notice

### ■ Notice (Soldering and Mounting) PRF15\_103R Series

#### 1. Solder and Flux

##### (1) Solder Paste

Use solder paste Sn:Pb=63:37wt%.

For your reference, we are using

63Sn/37Pb RMA9086 90-3-M18,

manufactured by Alpha Metals Japan Ltd.

96.5Sn/3.0Ag/0.5Cu M705-GRN360-K2-V,

manufactured by Senju Metal Industry Co., LTD for any Internal tests of this product.

##### (2) Flux

Use rosin type flux in soldering process.

If below flux is used, some problems might be caused in the product characteristics and reliability.

Please do not use below flux.

- Strong acidic flux (with halide content exceeding 0.2wt%).

- Water-soluble flux

(\*Water-soluble flux can be defined as non rosin type flux including wash-type flux and non-wash-type flux.)

#### 2. Cleaning Conditions and Drying

To remove the flux after soldering, observe the following points in order to avoid deterioration of the characteristics or any change to the external electrodes quality.

##### (1) Cleaning Conditions

| Solvent    | Dipping Cleaning                                                            | Ultrasonic Cleaning                                               |
|------------|-----------------------------------------------------------------------------|-------------------------------------------------------------------|
| 2-propanol | Less than 5 minutes at room temp.<br>or<br>Less than 2 minutes at 40°C max. | Less than 1 minute<br>20W/L Frequency of several 10kHz to 100kHz. |

A sufficient cleaning should be applied to remove flux completely.

##### (2) Drying

After cleaning, promptly dry this product.

#### 3. Soldering Conditions

In your mounting process, observe the following points in order to avoid deterioration of the characteristics or destruction of this product. The mounting quality of this product may also be affected by the mounting conditions, shown in the points below.


This product is for reflow soldering only. Flow soldering should not be allowed.

##### (1) Printing Conditions of Solder Paste

(a) Standard thickness of solder paste printing should be from 0.10 to 0.15 mm.

(b) After soldering, the solder fillet should be a height from 0.15 mm to the thickness of this product (see the figure at right).

(c) Too much solder gives too strong mechanical stress to this product. Such stress may cause cracking or other mechanical damage. Also, it can destroy the electrical performance of this product.

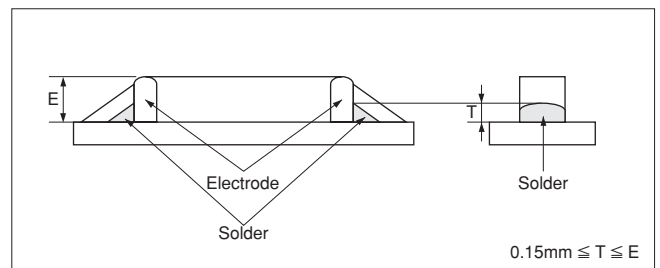

Continued on the following page. ↗


## ⚠Caution/Notice

Continued from the preceding page.

### (2) Allowable Soldering Temperature and Time

- Solder within the temperature and time combinations, indicated by the slanted lines in the graphs at right.
- The excessive soldering conditions may cause dissolution of metallization or deterioration of solder-wetting on the external electrode.
- In case of repeated soldering, the accumulated soldering time should be within the range shown below figure. ( For example, Reflow peak temperature: 260°C, twice → The accumulated soldering time at 260°C is within 30 sec. )


Allowable Reflow Soldering Temp. and Time

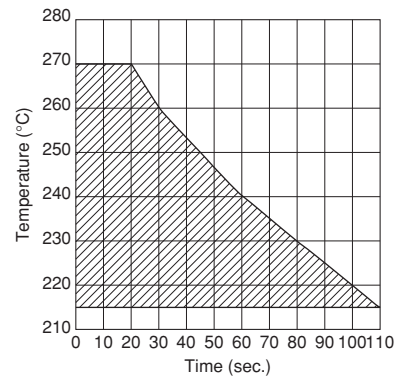

### (3) Standard Temperature Profile for Soldering

- Insufficient preheating may cause a crack on ceramic body. Difference between preheating temperature and maximum temperature in the profile should be 100°C.
- Rapid cooling by dipping in solvent or by other means is not recommended.

Reflow Soldering Conditions

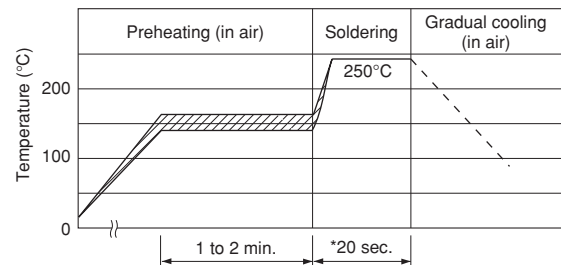

## ⚠️ Caution/Notice

### ■ Notice (Soldering and Mounting) PRF18/21 Series

#### 1. Solder and Flux

##### (1) Solder Paste

- (a) Flow Soldering: Use Sn:Pb=60:40wt%, Sn:Pb=63:37wt%, Sn:Ag:Cu=96.5:3.0:0.5wt% or equivalent type of solder.
- (b) Reflow Soldering: Use Sn:Pb=60:40wt%, Sn:Pb=63:37wt%, Sn:Ag:Cu=96.5:3.0:0.5wt% or equivalent type of solder paste.
- For your reference, we are using "63Sn/37Pb RMA9086 90-3-M18," manufactured by Alpha Metals Japan Ltd., "96.5Sn/3.0Ag/0.5Cu M705-GRN360-K2-V," manufactured by Senju Metal Industry Co., Ltd. for any internal tests of this product.

##### (2) Flux

Use rosin type flux in the soldering process.  
If the flux below is used, some problems might be caused in the product characteristics and reliability.  
Please do not use these types of flux.

- Strong acidic flux (with halide content exceeding 0.2wt%).
- Water-soluble flux  
(\*Water-soluble flux can be defined as non-rosin type flux including wash-type flux and non-wash-type flux.)

#### 2. Cleaning Conditions and Drying

To remove the flux after soldering, observe the following points in order to avoid deterioration of the characteristics or any change to the external electrodes' quality.

##### (1) Cleaning Conditions

| Solvent    | Dipping Cleaning                                                            | Ultrasonic Cleaning                                               |
|------------|-----------------------------------------------------------------------------|-------------------------------------------------------------------|
| 2-propanol | Less than 5 minutes at room temp.<br>or<br>Less than 2 minutes at 40°C max. | Less than 1 minute<br>20W/L Frequency of several 10kHz to 100kHz. |

A sufficient cleaning should be applied to remove flux completely.

##### (2) Drying


After cleaning, promptly dry this product.

#### 3. Soldering Conditions

In your mounting process, observe the following points in order to avoid deterioration of the characteristics or destruction of this product. The mounting quality of this product may also be affected by the mounting conditions, shown in the points below.

##### (1) Printing Conditions of Solder Paste

- (a) Recommended thickness of solder paste printing should be from 0.15 to 0.20mm.
- (b) After soldering, the solder fillet should be a height from 0.2 mm to the thickness of this product (see the figure at right).
- (c) Too much solder result in excessive mechanical stress on this product. Such stress may cause cracking or other mechanical damage. Also, it can destroy the electrical performance of this product.

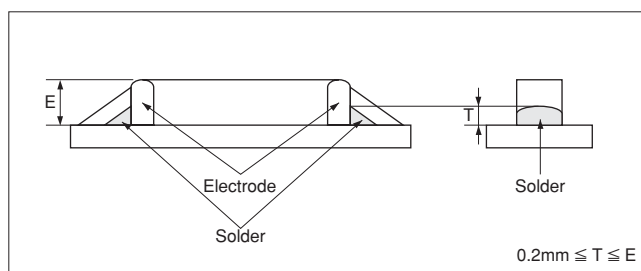

Continued on the following page. ↗


## ⚠Caution/Notice

Continued from the preceding page.

### (2) Adhesive Application and Curing

- If insufficient adhesive is applied, or if the adhesive is not sufficiently hardened, this product may have a loose contact with the land, during flow soldering.
- Too low viscosity of adhesive causes this product to slip on the board, after mounting.


Allowable Flow Soldering Temp. and Time

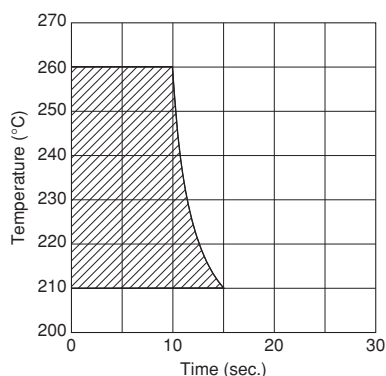

### (3) Allowable Soldering Temperature and Time

- Solder within the temperature and time combinations, indicated by the slanted lines in the following graphs.
- Excessive soldering conditions may cause dissolution of metallization or deterioration of solder-wetting on the external electrode.
- In the case of repeated soldering, the accumulated soldering time should be within the range shown in the figures below. (For example, Reflow peak temperature: 260°C, twice → The accumulated soldering time at 260°C is within 30sec.)


Allowable Reflow Soldering Temp. and Time

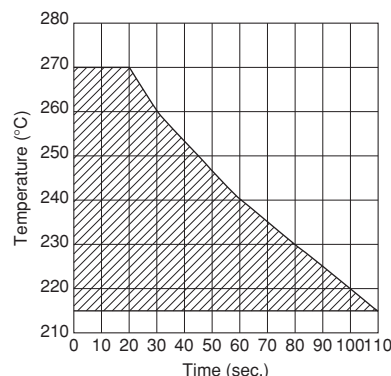

### (4) Recommendable Temperature Profile for Soldering

- Insufficient preheating may cause a crack on the ceramic body. The difference between preheating temperature and maximum temperature in the profile should be 100°C.
- Rapid cooling by dipping in solvent or by other means is not recommended.


Flow Soldering Conditions

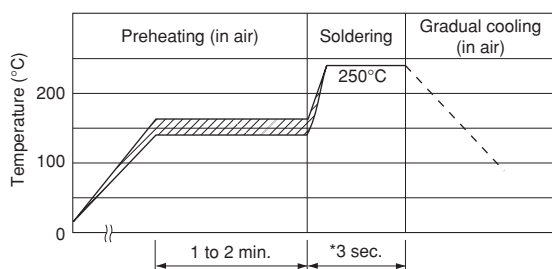

Preheating: 150±10°C, 1-2 minutes.  
Soldering: 250°C, 3 sec.

\* In the case of repeated soldering, the accumulated soldering time should be within the range shown in "(3) Allowable Soldering Temperature and Time."

Reflow Soldering Conditions

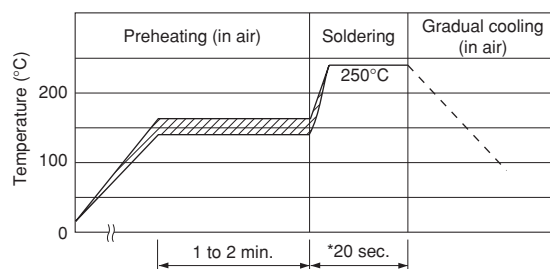

Preheating: 150±10°C, 1-2 minutes.  
Soldering: 250°C, 20 sec.

\* In the case of repeated soldering, the accumulated soldering time should be within the range shown in "(3) Allowable Soldering Temperature and Time."

- There may be a risk of unexpected failures (tombstone, insufficient solder-wetting, etc.) in the mounting process caused by mounting conditions. Please make sure that this product is correctly mounted under the specified mounting conditions.

## ⚠Caution/Notice

### ■ Notice (Handling)

#### PTGL Series

1. Do not apply an excessive force to the lead.  
Otherwise, it may cause the junction between lead and element to break, or may crack the element.  
Therefore, holding the element side lead wire is recommended when lead wire is bent or cut.
2. This product does not have waterproof construction.  
Splashed water may cause failure mode such as decline of characteristics or current leak.
3. When this product is operated, the temperature of some areas may be over 100 to 160 degrees C. Be sure that surrounding parts and inserting material can withstand the temperature. If the surrounding part and material are kept under such conditions, they may deteriorate or produce harmful gas (Chlorine gas, Hydrogen sulfide gas, Ammonia gas, Sulfuric acid gas, Nitric oxide gas, etc.), and such harmful gas may deteriorate the element.

### ■ Notice (Handling)

#### PTFL/PTFM Series

1. Do not apply an excessive force to the lead.  
Otherwise, it may cause the junction between lead and element to break, or may crack the element.  
Therefore, holding the element side lead wire is recommended when lead wire is bent or cut.
2. This product does not have waterproof construction.  
Splashed water may cause failure mode such as decline of characteristics or current leak.

### ■ Notice (Handling)

#### PRG/PRF Series

1. When this product is operated, the temperature of some area may be over 100 to 150 degrees C. Be sure that surrounding parts and inserting material can withstand the temperature. If the surrounding parts and material are kept under such conditions, they may deteriorate or produce harmful gas (Chlorine gas, Hydrogen sulfide gas, Ammonia gas, Sulfuric acid gas, Nitric oxide gas, etc.), and such harmful gas may deteriorate the element.
2. Do not assemble this product with air-sealing or resin casting. Such sealing may deteriorate element.

## 99

## Lead Type PTGL/PTF Series Package

### ■ Minimum Order Quantity (for Overcurrent Protection)

| Series                          | Bulk Type          |           | Ammo Pack Taping Type |           |
|---------------------------------|--------------------|-----------|-----------------------|-----------|
|                                 | Part Number        | Min. Qty. | Part Number           | Min. Qty. |
| Narrow Current Band 30V series  | PTGL04AS100K2B51B0 | 500       | PTGL04AS100K2B51A0    | 1500      |
|                                 | PTGL04AS100K2N51B0 |           | PTGL04AS100K2N51A0    |           |
|                                 | PTGL05AS3R9K2B51B0 |           | PTGL05AS3R9K2B51A0    |           |
|                                 | PTGL07AS2R7K2B51B0 |           | PTGL07AS2R7K2B51A0    |           |
|                                 | PTGL07AS1R8K2B51B0 |           | PTGL07AS1R8K2B51A0    |           |
|                                 | PTGL09AS1R2K2B51B0 |           | PTGL09AS1R2K2B51A0    |           |
|                                 | PTGL12AS0R8K2B51B0 | 300       | PTGL12AS0R8K2B51A0    |           |
| Narrow Current Band 51V series  | PTGL04AS100K3B51B0 | 500       | PTGL04AS100K3B51A0    | 1500      |
|                                 | PTGL05AS6R8K3B51B0 |           | PTGL05AS6R8K3B51A0    |           |
|                                 | PTGL07AS3R3K3B51B0 |           | PTGL07AS3R3K3B51A0    |           |
|                                 | PTGL09AS2R2K3B51B0 |           | PTGL09AS2R2K3B51A0    |           |
|                                 | PTGL12AS1R2K3B51B0 | 300       | PTGL12AS1R2K3B51A0    |           |
| Narrow Current Band 60V series  | PTGL04AS220K4B51B0 | 500       | PTGL04AS220K4B51A0    | 1500      |
|                                 | PTGL04AS220K4N51B0 |           | PTGL04AS220K4N51A0    |           |
|                                 | PTGL05AS100K4B51B0 |           | PTGL05AS100K4B51A0    |           |
|                                 | PTGL07AS5R6K4B51B0 |           | PTGL07AS5R6K4B51A0    |           |
|                                 | PTGL07AS5R6K4N51B0 |           | PTGL07AS5R6K4N51A0    |           |
|                                 | PTGL09AS3R3K4B51B0 |           | PTGL09AS3R3K4B51A0    |           |
|                                 | PTGL12AS2R2K4B51B0 | 300       | PTGL12AS2R2K4B51A0    |           |
| Narrow Current Band 140V series | PTGL04AS560K6B51B0 | 500       | PTGL04AS560K6B51A0    | 1500      |
|                                 | PTGL05AS270K6B51B0 |           | PTGL05AS270K6B51A0    |           |
|                                 | PTGL07AS150K6B51B0 |           | PTGL07AS150K6B51A0    |           |
|                                 | PTGL09AS120K6B51B0 |           | PTGL09AS120K6B51A0    |           |
|                                 | PTGL09AS7R6K6B51B0 |           | PTGL09AS7R6K6B51A0    |           |
|                                 | PTGL12AS4R7K6B51B0 | 300       | PTGL12AS4R7K6B51A0    |           |
| 16V Series                      | PTGL05AR1R0M1B51B0 | 500       | PTGL05AR1R0M1B51A0    | 2000      |
|                                 | PTGL06AR0R8M1B51B0 |           | PTGL06AR0R8M1B51A0    |           |
|                                 | PTGL07ARR47M1B51B0 |           | PTGL07ARR47M1B51A0    |           |
|                                 | PTGL09ARR33M1B51B0 |           | PTGL09ARR33M1B51A0    |           |
|                                 | PTGL10ARR27M1B51B0 | 300       | PTGL10ARR27M1B51A0    |           |
|                                 | PTGL12AR0R2M1B51B0 |           | PTGL12AR0R2M1B51A0    |           |
|                                 | PTGL14ARR15M1B51B0 |           | -                     | -         |
| 24V Series                      | PTGL07BD100N2B51B0 | 500       | PTGL07BD100N2B51A0    | 1500      |
|                                 | PTGL07BD6R8N2B51B0 |           | PTGL07BD6R8N2B51A0    |           |
|                                 | PTGL09BD4R7N2B51B0 |           | PTGL09BD4R7N2B51A0    |           |
|                                 | PTGL09BD3R3N2B51B0 |           | PTGL09BD3R3N2B51A0    |           |
|                                 | PTGL09BD2R2N2B51B0 |           | PTGL09BD2R2N2B51A0    |           |
| 30V Series                      | PTGL04AR130H2B51B0 | 500       | PTGL04AR130H2B51A0    | 1500      |
|                                 | PTGL07AR4R6H2B51B0 |           | PTGL07AR4R6H2B51A0    |           |
|                                 | PTGL09AR1R8H2B51B0 |           | PTGL09AR1R8H2B51A0    |           |
|                                 | PTGL12AR1R2H2B51B0 | 300       | -                     | -         |
|                                 | PTGL13AR0R8H2B71B0 |           | -                     | -         |
| 32V Series                      | PTGL07BD470N3B51B0 | 500       | PTGL07BD470N3B51A0    | 1500      |
|                                 | PTGL07BD330N3B51B0 |           | PTGL07BD330N3B51A0    |           |
|                                 | PTGL07BD220N3B51B0 |           | PTGL07BD220N3B51A0    |           |
|                                 | PTGL07BD150N3B51B0 |           | PTGL07BD150N3B51A0    |           |
| 56V Series                      | PTGL07AR220M3P51B0 | 500       | PTGL07AR220M3P51A0    | 1500      |
|                                 | PTGL07AR8R2M3P51B0 |           | PTGL07AR8R2M3P51A0    |           |
|                                 | PTGL09AR150M3B51B0 |           | PTGL09AR150M3B51A0    |           |
|                                 | PTGL10AR3R9M3P51B0 |           | PTGL10AR3R9M3P51A0    |           |
|                                 | PTGL09AR4R7M3B51B0 |           | PTGL09AR4R7M3B51A0    |           |
|                                 | PTGL10AR3R9M3B51B0 | 300       | PTGL10AR3R9M3B51A0    |           |
|                                 | PTGL14AR3R3M3B71B0 |           | -                     | -         |

| Series      | Bulk Type          |           | Ammo Pack Taping Type |           |
|-------------|--------------------|-----------|-----------------------|-----------|
|             | Part Number        | Min. Qty. | Part Number           | Min. Qty. |
| 80V Series  | PTGL05AR550H4P51B0 | 500       | PTGL05AR550H4P51A0    | 1500      |
|             | PTGL07AR250H4B51B0 |           | PTGL07AR250H4B51A0    |           |
|             | PTGL09AR9R4H4B51B0 |           | PTGL09AR9R4H4B51A0    |           |
| 125V Series | PTGL05AR181M7P52B0 | 500       | PTGL05AR181M7P52A0    | 1500      |
|             | PTGL09AR220M6B52B0 | 300       | PTGL09AR220M6B52A0    | 1000      |
|             | PTGL14AR100M6B72B0 | 150       | -                     | -         |
| 140V Series | PTGL07AR330M6A51B0 | 500       | -                     | -         |
|             | PTGL09AR220M6C61B0 | 300       | -                     | -         |
|             | PTGL10AR150M6C61B0 | 250       | -                     | -         |
|             | PTGL12AR100M6C01B0 | 250       | -                     | -         |
|             | PTGL13AR6R8M6C01B0 | 200       | -                     | -         |
|             | PTGL16AR5R6M6C01B0 | 150       | -                     | -         |
| 250V Series | -                  | -         | PTGL07BB220N0B52A0    | 1000      |
|             | -                  | -         | PTGL09AR390N0B52A0    |           |
|             | -                  | -         | PTGL10BB120N0P52A0    |           |
| 265V Series | PTGL05AR151H8P52B0 | 500       | PTGL05AR151H8P52A0    | 1000      |
|             | PTGL05AR181M9N51B0 |           | -                     | -         |
|             | PTGL05AR121M9N51B0 |           | -                     | -         |
|             | PTGL07AR820M9A51B0 | 300       | -                     | -         |
|             | PTGL07AR700H8B52B0 |           | PTGL07AR700H8B52A0    | 1000      |
|             | PTGL07AR650H8B52B0 |           | PTGL07AR650H8B52A0    | 1000      |
|             | PTGL07AR450H8B52B0 |           | PTGL07AR450H8B52A0    | 1000      |
|             | PTGL07AR560M9A51B0 | 200       | -                     | -         |
|             | PTGL09AR390M9C61B0 |           | -                     | -         |
|             | PTGL09AR250H8B52B0 |           | PTGL09AR250H8B52A0    | 1000      |
|             | PTGL12AR270M9C01B0 |           | -                     | -         |
|             | PTGL12AR150H8B72B0 |           | -                     | -         |
|             | PTGL14AR180M9C01B0 | 150       | -                     | -         |
|             | PTGL13AR100H8B72B0 | 100       | -                     | -         |
|             | PTGL18AR6R0H8B72B0 |           | -                     | -         |

### ■ Minimum Order Quantity (for Inrush Current Suppression)

|                        |                    |     |                    |      |
|------------------------|--------------------|-----|--------------------|------|
| Less than 100μF Series | PTGL07AS121M0N51B0 | 500 | PTGL07AS121M0N51A0 | 1000 |
|                        | PTGL07AS181M0N51B0 | 500 | PTGL07AS181M0N51A0 | 1000 |
|                        | PTGL07AS201M0N51B0 | 500 | PTGL07AS201M0N51A0 | 1000 |
| 100μF or more Series   | PTGL14AS470H0B02BZ | 150 | -                  | -    |
|                        | PTGL16AS330H0B02BZ | 150 | -                  | -    |
|                        | PTGL16AS470H0B02BZ | 150 | -                  | -    |
|                        | PTGL16AS680H0B02BZ | 150 | -                  | -    |
|                        | PTGL16AS101H0B02BZ | 150 | -                  | -    |
|                        | PTGL20AS330H0D02BZ | 100 | -                  | -    |
|                        | PTGL20AS470H0D02BZ | 100 | -                  | -    |
|                        | PTGL20AS470H0D02BZ | 100 | -                  | -    |


### ■ Minimum Order Quantity (for Overheat Sensing)

|            |             |     |   |   |
|------------|-------------|-----|---|---|
| PTF Series | PTFL Series | 400 | - | - |
|            | PTFM Series | 200 | - | - |

## Lead Type PTGL/PTF Series Package

Continued from the preceding page.

### ■ Narrow Current Band 30 - 140V Series / 16 - 80V Series / Inrush Current Suppression Taping Dimensions

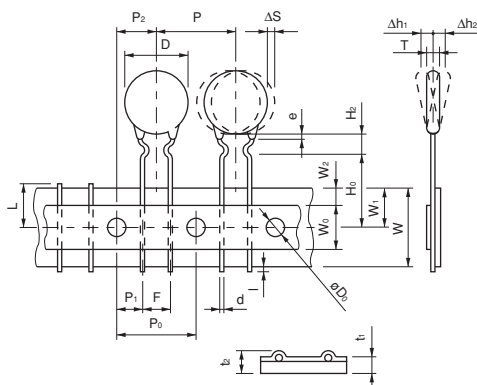


| Item                                              | Code                              | Dimensions (mm)                      | Note                                             |
|---------------------------------------------------|-----------------------------------|--------------------------------------|--------------------------------------------------|
| Pitch of Component                                | P                                 | 12.7                                 | Tolerance is determined by ΔS.                   |
| Pitch of Sprocket Hole                            | P <sub>0</sub>                    | 12.7±0.3                             |                                                  |
| Lead Spacing                                      | F                                 | 5.0 <sup>+0.8</sup> <sub>-0.3</sub>  |                                                  |
| Length from Hole Center to Lead                   | P <sub>1</sub>                    | 3.85±0.8                             |                                                  |
| Length from Hole Center to Component Center       | P <sub>2</sub>                    | 6.35±1.3                             | Deviation in the feeding direction               |
| Body Diameter                                     | D                                 | Please see in Ratings                |                                                  |
| Body Thickness                                    | T                                 | Please see in Ratings                |                                                  |
| Deviation along Tape, Left or Right Defect        | ΔS                                | ±1.5                                 | Including the inclination caused by lead bending |
| Carrier Tape Width                                | W                                 | 18.0±0.5                             |                                                  |
| Position of Sprocket Hole                         | W <sub>1</sub>                    | 9.0 <sup>+0.5</sup> <sub>-0.75</sub> | Deviation of tape width                          |
| Lead Distance between Reference and Bottom Planes | H <sub>0</sub>                    | 16.0±1.0                             |                                                  |
|                                                   | H <sub>2</sub>                    | 6.0 max.                             |                                                  |
| Protrusion Length                                 | I                                 | +0.5 to -1.0                         |                                                  |
| Diameter of Sprocket Hole                         | D <sub>0</sub>                    | 4.0±0.2                              |                                                  |
| Lead Diameter                                     | d                                 | Please see in Ratings                |                                                  |
| Total Tape Thickness                              | t <sub>1</sub>                    | 0.6±0.3                              |                                                  |
| Total Thickness of Tape and Lead Wire             | t <sub>2</sub>                    | 2.0 max.                             |                                                  |
| Deviation across Tape                             | Δh <sub>1</sub> , Δh <sub>2</sub> | 1.5 max.                             |                                                  |
| Portion to cut in Case of Defect                  | L                                 | 11.0 <sup>+0</sup> <sub>-2.0</sub>   |                                                  |
| Hold down Tape Width                              | W <sub>0</sub>                    | 11.0 min.                            |                                                  |
| Hold down Tape Position                           | W <sub>2</sub>                    | 4.0 max.                             |                                                  |
| Coating Extension on Lead                         | e                                 | Up to the center of crimp            |                                                  |

Continued on the following page. ↗

## Lead Type PTGL/PTF Series Package

Continued from the preceding page.

### ■ 125/250/265V Series Taping Dimensions

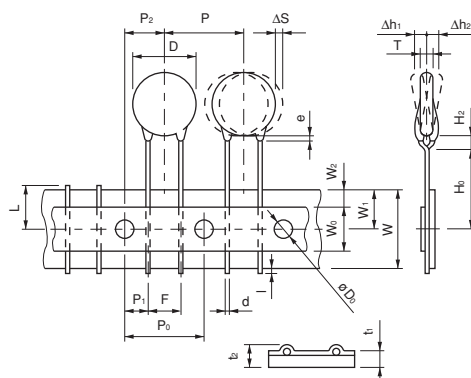

| Item                                              | Code                     | Dimensions (mm)                      | Note                                              |
|---------------------------------------------------|--------------------------|--------------------------------------|---------------------------------------------------|
| Pitch of Component                                | P                        | 12.7                                 | Tolerance is determined by $\Delta S$ .           |
| Pitch of Sprocket Hole                            | P <sub>0</sub>           | 12.7±0.3                             |                                                   |
| Lead Spacing                                      | F                        | 5.0 <sup>+0.8</sup> <sub>-0.3</sub>  |                                                   |
| Length from Hole Center to Lead                   | P <sub>1</sub>           | 3.85±0.8                             |                                                   |
| Length from Hole Center to Component Center       | P <sub>2</sub>           | 6.35±1.3                             | Deviation in the feeding direction                |
| Body Diameter                                     | D                        | Please see Ratings                   |                                                   |
| Body Thickness                                    | T                        | Please see Ratings                   |                                                   |
| Deviation along Tape, Left or Right               | $\Delta S$               | ±1.5                                 | Including the inclination caused by lead bending. |
| Carrier Tape Width                                | W                        | 18.0±0.5                             |                                                   |
| Position of Sprocket Hole                         | W <sub>1</sub>           | 9.0 <sup>+0.5</sup> <sub>-0.75</sub> | Deviation of tape width.                          |
| Lead Distance between Reference and Bottom Planes | H <sub>0</sub>           | 16.0±1.0                             |                                                   |
|                                                   | H <sub>2</sub>           | 6.0 max.                             |                                                   |
| Protrusion Length                                 | I                        | +0.5 to -1.0                         |                                                   |
| Diameter of Sprocket Hole                         | D <sub>0</sub>           | 4.0±0.2                              |                                                   |
| Lead Diameter                                     | d                        | 0.6±0.05                             |                                                   |
| Total Tape Thickness                              | t <sub>1</sub>           | 0.6±0.3                              |                                                   |
| Total Thickness of Tape and Lead Wire             | t <sub>2</sub>           | 2.0 max.                             |                                                   |
| Deviation across Tape                             | $\Delta h_1, \Delta h_2$ | 1.5 max.                             |                                                   |
| Portion to cut in Case of Defect                  | L                        | 11.0 <sup>+0</sup> <sub>-2.0</sub>   |                                                   |
| Hold down Tape Width                              | W <sub>0</sub>           | 11.0 min.                            |                                                   |
| Hold down Tape Position                           | W <sub>2</sub>           | 4.0 max.                             |                                                   |
| Coating Extension on Lead                         | e                        | Up to the center of crimp            |                                                   |

⚠Note:

1. Export Control

<For customers outside Japan>

No Murata products should be used or sold, through any channels, for use in the design, development, production, utilization, maintenance or operation of, or otherwise contribution to (1) any weapons (Weapons of Mass Destruction [nuclear, chemical or biological weapons or missiles] or conventional weapons) or (2) goods or systems specially designed or intended for military end-use or utilization by military end-users.

<For customers in Japan>

For products which are controlled items subject to the "Foreign Exchange and Foreign Trade Law" of Japan, the export license specified by the law is required for export.

2. Please contact our sales representatives or product engineers before using the products in this catalog for the applications listed below, which require especially high reliability for the prevention of defects which might directly damage a third party's life, body or property, or when one of our products is intended for use in applications other than those specified in this catalog.

- |                             |                                                                                                      |
|-----------------------------|------------------------------------------------------------------------------------------------------|
| ① Aircraft equipment        | ② Aerospace equipment                                                                                |
| ③ Undersea equipment        | ④ Power plant equipment                                                                              |
| ⑤ Medical equipment         | ⑥ Transportation equipment (vehicles, trains, ships, etc.)                                           |
| ⑦ Traffic signal equipment  | ⑧ Disaster prevention / crime prevention equipment                                                   |
| ⑨ Data-processing equipment | ⑩ Application of similar complexity and/or reliability requirements to the applications listed above |

3. Product specifications in this catalog are as of November 2013. They are subject to change or our products in it may be discontinued without advance notice.

Please check with our sales representatives or product engineers before ordering. If there are any questions, please contact our sales representatives or product engineers.

4. Please read rating and ⚠CAUTION (for storage, operating, rating, soldering, mounting and handling) in this catalog to prevent smoking and/or burning, etc.

5. This catalog has only typical specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

6. Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or a third party's intellectual property rights and other related rights in consideration of your use of our products and/or information described or contained in our catalogs. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights mentioned above under licenses without our consent.

7. No ozone depleting substances (ODS) under the Montreal Protocol are used in our manufacturing process.



**Head Office**  
1-10-1, Higashi Kotari, Nagaokakyo-shi, Kyoto 617-8555, Japan  
Phone: 81-75-951-9111

**International Division**  
3-29-12, Shibuya, Shibuya-ku, Tokyo 150-0002, Japan  
Phone: 81-3-5469-6123 Fax: 81-3-5469-6155 E-mail: intl@murata.co.jp

<http://www.murata.com/>