


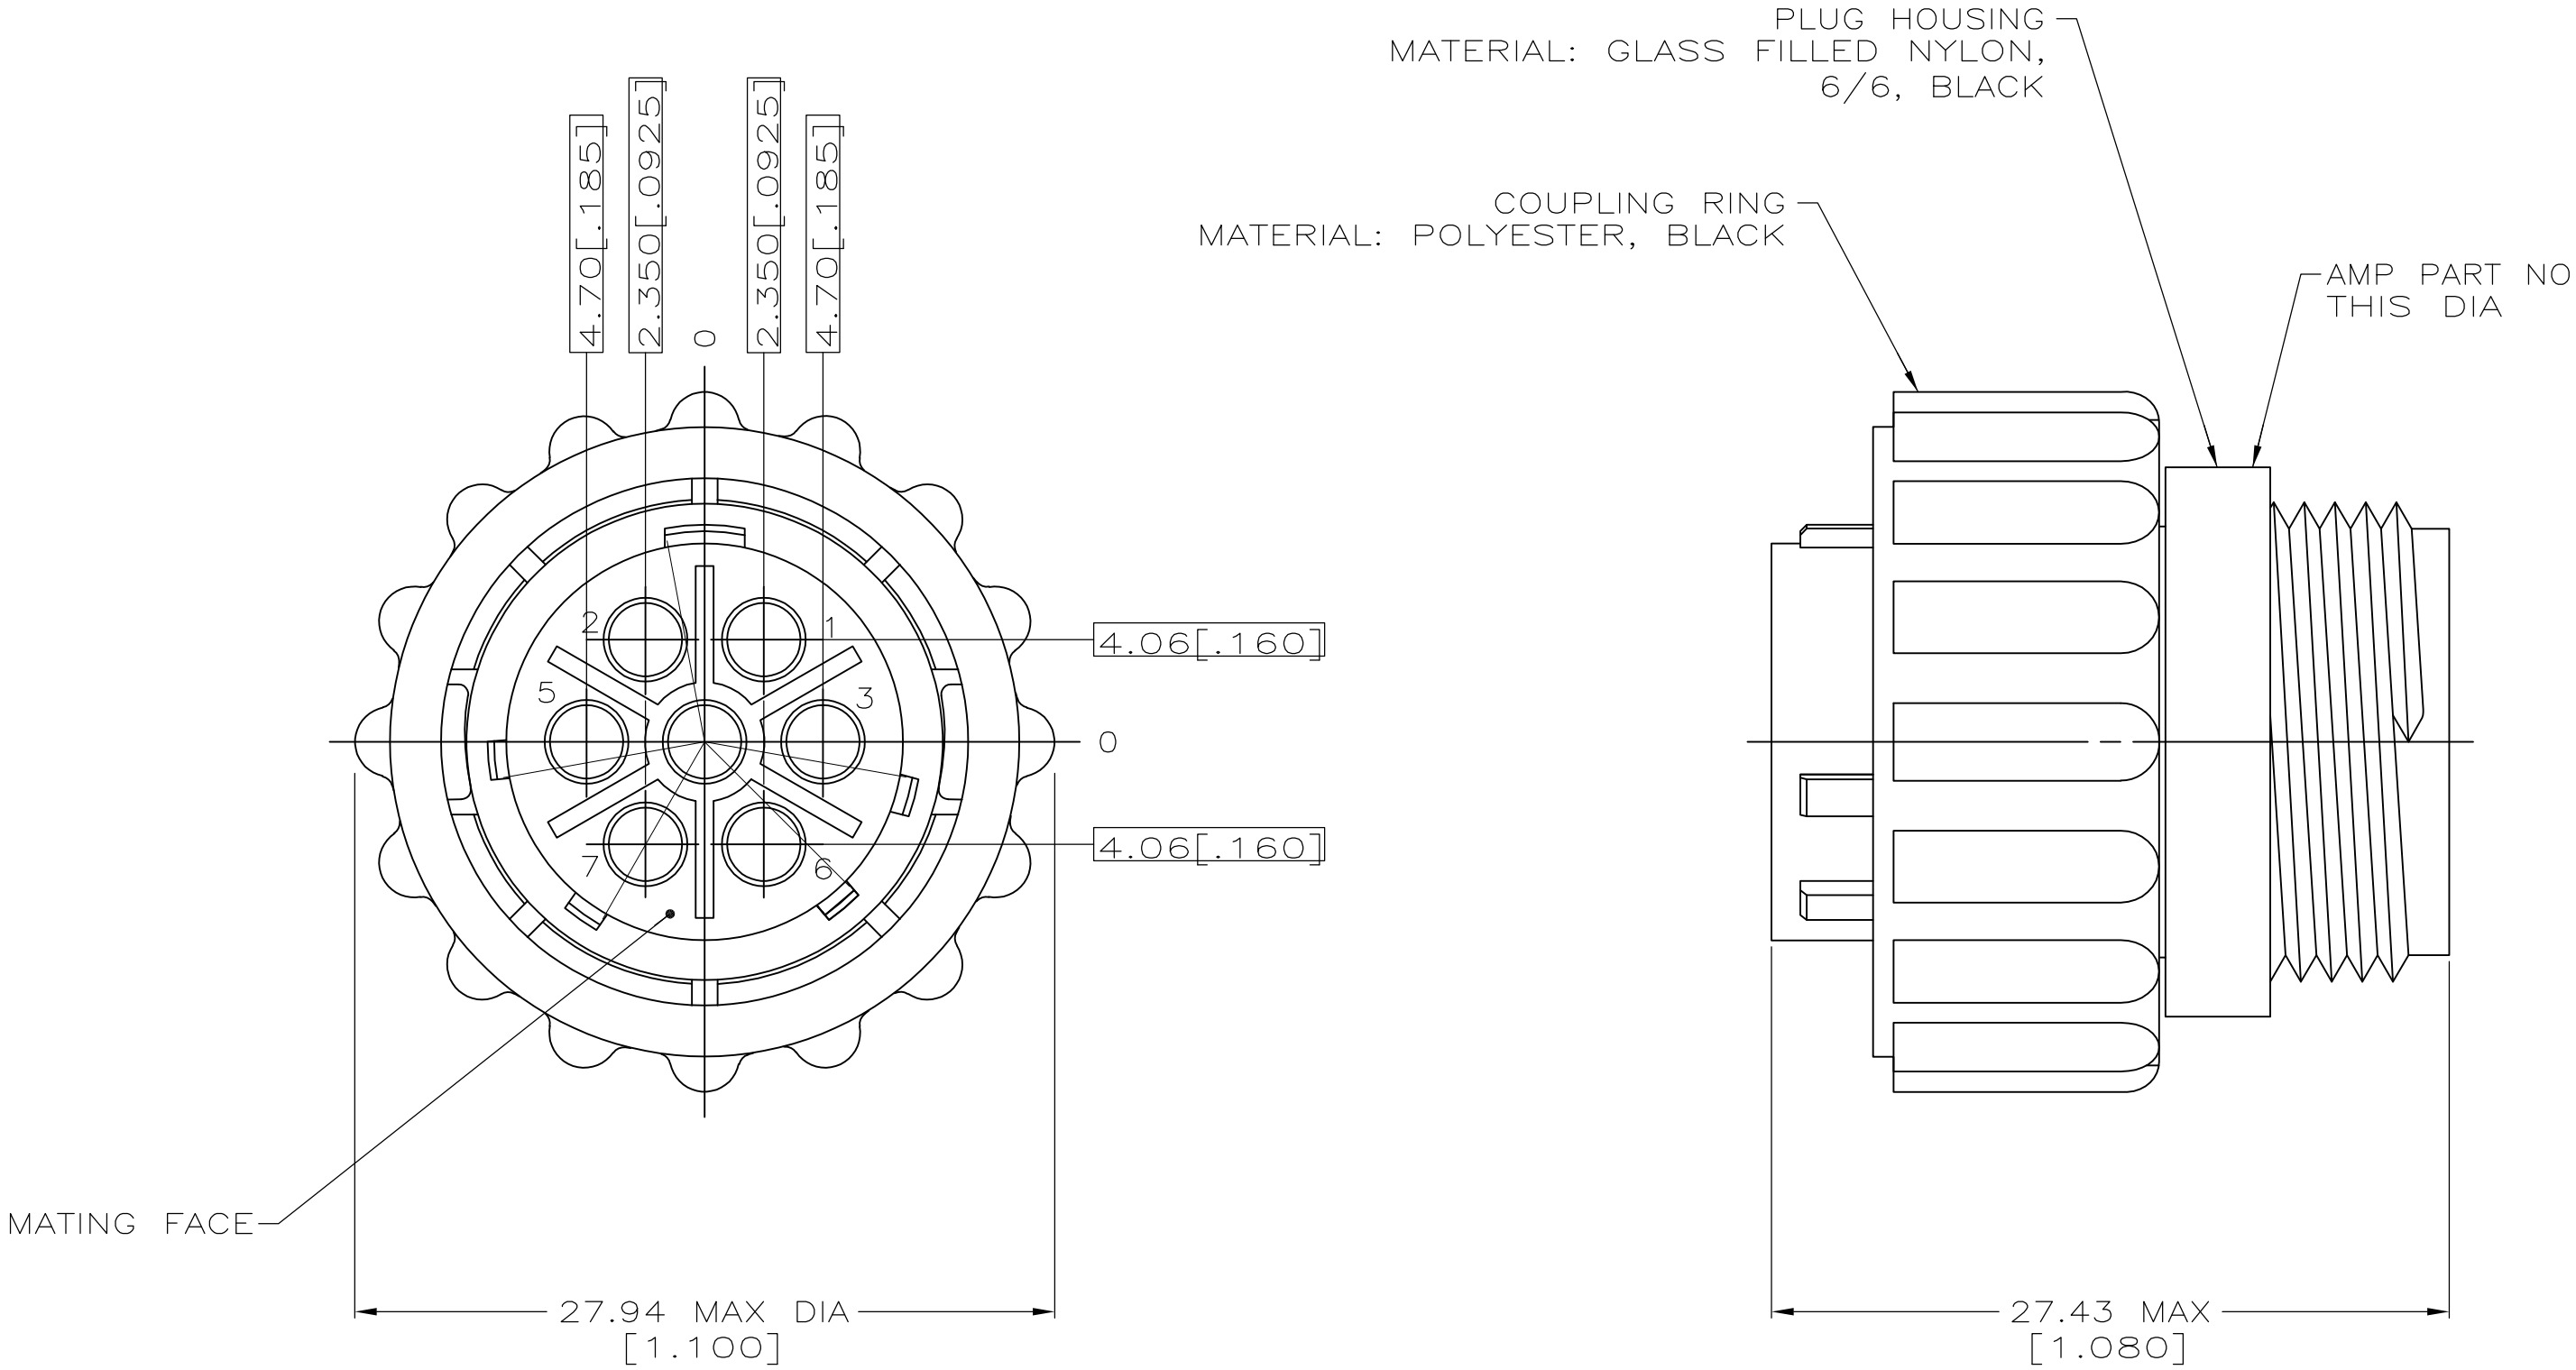

1. CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACES OF CONNECTOR.
2. WILL ACCEPT SEVEN (7) MULTIMATE SOCKET CONTACTS.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

211399-1

PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

D.HARDY

07-01-94

CHK

R.STONE

08-10-94

APVD

A.FRANTUM

10-03-94

DIMENSIONS:

MM[INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± ± -

FINISH -

SEE CALLOUTS

NAME

PLUG ASSEMBLY, STANDARD SEX, 13-7, CPC

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A2

00779

C-211399

-

CUSTOMER DRAWING

SCALE 4:1

SHEET 1 of 1

REV D1