

Pushbuttons, Selector Switches and Pilot Lights



NEW Enhanced brightness with low current consumption




Build-to-Order Guides help you select the right model.

- » Wide range of styles in 16 mm and 22 mm
- » Over 6,000 models available
- » Short delivery time
- » Assembled to your order in U.S.A.


Why Choose Omron Industrial Switches?

Omron offers build-to-order Pushbuttons, Selector Switches and Pilot Lights to shorten delivery time and increase the availability of the exact parts you want. They are assembled at Omron's manufacturing facility in St. Charles, IL, so no matter where you are located, parts reach you in a just few days or overnight as needed. Use this guide to choose from over 6,000 part combinations as well as legend plates and accessories. Choose Omron for your next control panel project.


Reduce Installation Time

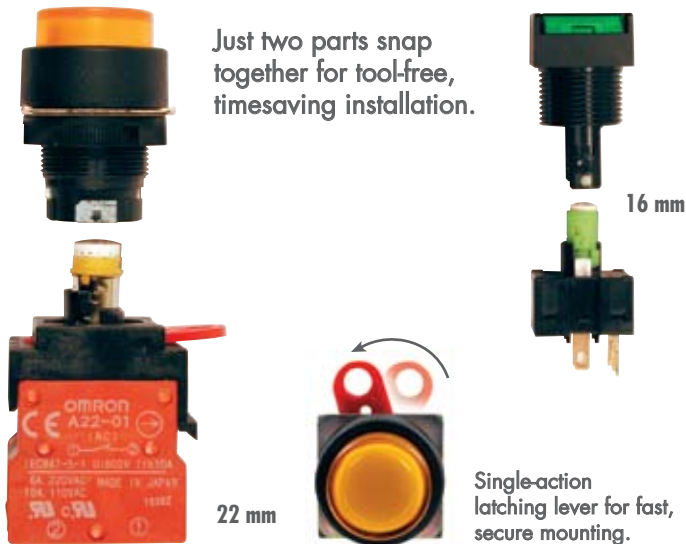

Reduce Panel Depth

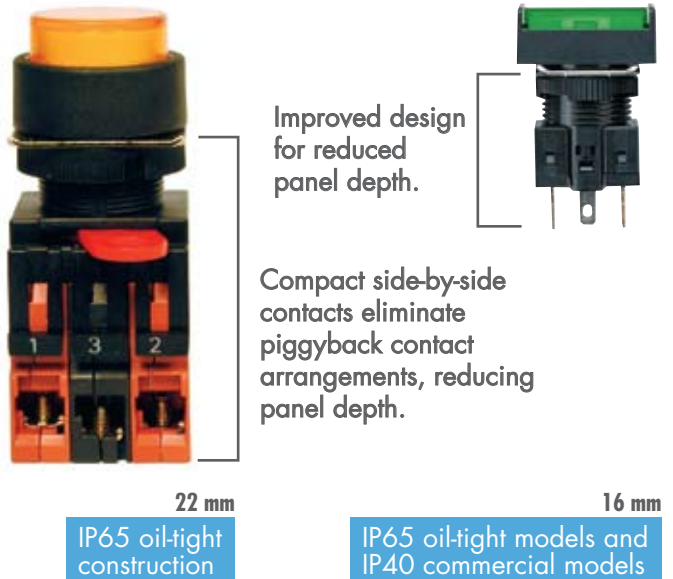

Other Features

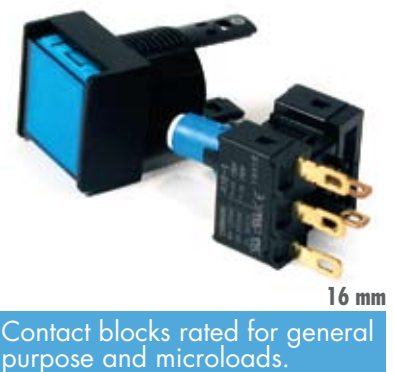

Super-bright LED illumination offers 60 times longer life than incandescent lamps, reducing maintenance.



All 16 mm and 22 mm models are UL and CE approved.

Ultra-bright, Energy Saving LEDs



Everyone wants to do their part for the environment and reducing power consumption can make a small but notable difference. Omron redesigned lighted pushbuttons, selector switches and indicators to take advantage of ultra-bright, energy-saving LEDs. Available now on 16 mm models, the new LEDs will be available soon on 22 mm models.

Bright, Evenly Lit Colors

Design your control panels with Omron's ultra-bright switches for appealing aesthetics and rich color evenly distributed across the lighted surface. Compared to Omron's previous LED, switches using the new lamp are fully 20% brighter for improved visibility for operators.

How Big is the Energy Savings?

Depending on the lamp voltage and color, Omron has reduced the current consumption by 20% to 73%! The milliamps saved add up to a fair energy savings over the years of operation and increased LED lifetime.

Lamp voltage	LED color	Before	After	Reduction
5 VDC	Red	15 mA	8 mA	47%
	Yellow, White, Green, Blue	30 mA	8 mA	73%
12 VDC	All colors	15 mA	8 mA	47%
24 VDC	All colors	10 mA	8 mA	20%

Eliminate Wiring Errors

The 12 V and 24 V switches now accept both AC and DC voltages. Non-polarized terminals are now provided to eliminate polarity errors during wiring. This flexibility also helps reduce inventory costs for panel builders and for customers who buy their machines.



Locally Built to Your Order

Fast Delivery From Local Stock

Omron builds the exact switches you need, when you need them, from a large local stock of components. Omron's manufacturing facility in St. Charles, Illinois makes 100% quality tested switches on a modern production line that meets both ISO-9000 and ISO-14000 standards.

Contact your Omron sales representative today for build-to-order switches and custom-built control panels.

Do You Need Custom-Built Panels?

Our manufacturing facility is a UL-certified panel builder ready to help you design and build control panels using Omron pushbutton switches, pilot lights, power supplies and other controls. We even incorporate controls from your preferred suppliers to maintain your standardized usage. Each panel is fully tested, documented then delivered ready to install on your machine.

Do You Need More Info?

Visit **omron247.com** and enter "pushbuttons," "switches," or "pilot lights" in our search center to learn more. You can also view part numbers of our most popular pushbutton types with complete part number description and pricing.

The screenshot shows the Omron Industrial Automation website for the United States, Mexico, and Latin America. The main content area displays a list of pushbutton products under the heading "Pushbuttons (14mm)". The products are listed in a table with columns for Part Number, Price, QTY, Description, Shape, Operator Color, Operating Function, Contact Form, and Light Source.

Part Number	Price	QTY	Description	Shape	Operator Color	Operating Function	Contact Form	Light Source
A161-ADN-0	\$14.11	1	Non-Illuminated 16 mm Pushbutton Switch, SPST, Sub-D Terminal	Square	Blue	Momentary	DPST	N/A
A161-ADN-1	\$14.11	1	Non-Illuminated 16 mm Pushbutton Switch, SPST, Sub-D Terminal	Square	Black	Momentary	DPST	N/A
A161-ADN-2	\$14.11	1	Non-Illuminated 16 mm Pushbutton Switch, SPST, Sub-D Terminal	Square	Red	Momentary	DPST	N/A
A161-ADN-3	\$14.11	1	Non-Illuminated 16 mm Pushbutton Switch, SPST, Sub-D Terminal	Square	Yellow	Momentary	DPST	N/A
A161-ADN-4	\$14.11	1	Non-Illuminated 16 mm Pushbutton Switch, SPST, Sub-D Terminal	Rectangular	Green	Momentary	DPST	N/A
A161-ADN-5	\$14.11	1	Non-Illuminated 16 mm Pushbutton Switch, SPST, Sub-D Terminal	Rectangular	Red	Momentary	DPST	N/A

The sidebar on the right includes links to "Order Center", "Search Center", "CAD Drawings", "Application Solutions", "Software Downloads", "Cross Reference", "Find an Omron Distributor", and "Find an Omron Service Center". At the bottom, there is a "Top Sellers Center" section listing various Omron products.

A22 Series: Overview

Reliable oil-tight pushbutton switches offer a wide range of shapes and colors. A locking lever ensures easy mounting and removal of the switch unit. To increase wiring efficiency and decrease mounting depth, switches feature a three-row mounting of switch contact blocks.



- Finger protection mechanism on switch unit provided as a standard feature
- Mounted using either open-type (fork-type) or closed-type (round-type) crimp terminals.
- Use 25-dia. ring to install in 25-dia. panel cutouts.
- Wide range of shapes and colors.
- IP65 oil resistant
- EN60947-5-1, IEN60947-5-1

Available Styles

Pushbutton Switch, Non-Lighted
 Pushbutton Switch, Lighted
 Emergency Stop Switch, Non-Lighted
 Emergency Stop Switch, Lighted
 Selector Switches, Non-Lighted
 Selector Switches, Lighted
 Keyed Selector Switches
 Pilot Light

Series	Page
A22	5
A22L	5
A22E	6
A22EL	6
A22S	7
A22W	7
A22K	8
M22	9



Automation...simple...powerful.

A22 Non-Lighted Pushbutton Switches, 22 mm dia., A22L Lighted Pushbutton Switches, 22 mm dia.

Non-Lighted



Round Flat
A22-F



Round
Projection
A22-T



Round Full
Guard
A22-G



Round Half
Guard **A22-H**

Non-Lighted



Square
Projection
A22-C



Square
Full Guard
A22-D



Round Mushroom
Head 30 mm dia.
A22-S



Round Mushroom
Head 40 mm dia.
A22-M

Lighted



Lighted Round
Projection
A22L-T



Lighted Round
Full Guard
A22L-G



Lighted Round
Half Guard
A22L-H



Lighted Square
Projection
A22L-C



Lighted Square
Full Guard
A22L-D

A22 1 2 3 4 5 6

1 Lighted/Non-lighted

Code	Description
No symbol	Non-lighted
L	Lighted

2 Flange Shape

Non-lighted	
Code	Description
F	Round/Flat
T	Round/Projection
G	Round/Full-guard
H	Round/Half-guard
C	Square/Projection
D	Square/Full-guard
S	Round/Mushroom (30-dia. head)
M	Round/Mushroom (40-dia. head)
Lighted	
T	Round/Projection
G	Round/Full-guard
H	Round/Half-guard
C	Square/Projection
D	Square/Full-guard

3 Illumination Color

Code	Description
R	Red
G	Green
Y	Yellow
W	White
A	Blue
B	Black (for non-lighted type only)

4 Light Source

Without Voltage Reduction Unit		
Code	Operating Voltage	
No symbol	Non-lighted	
6D	LED	6 VDC
6A		6 VAC
12A		12 VAC/VDC
24A		24 VAC/VDC
With Voltage Reduction Unit		
T1	LED	110 VAC (See note 1)
T2		220 VAC (See note 2)

5 Contacts

Code	Description
10	SPSTNO
01	SPSTNC
11	SPSTNO + SPSTNC
20	SPSTNO + SPSTNO
02	SPSTNC + SPSTNC

Note: 1. Add a "-1" suffix to part number when ordering two contact styles consisting of one contact block.

2. Double contact block types add 18mm in depth and 10 mm in width from single contact types.

6 Switch Action

Code	Description
M	Momentary
A	Alternate

Note: 1. Operational voltage: 95 to 115 VAC
2. Operational voltage: 190 to 230 VAC
3. The LED lamp (24 VAC/VDC) can be lit by directly applying 100 VAC/VDC (200 VAC/VDC) to the lamp terminal.
4. LED incorporates the 24 VAC/VDC type to the Voltage Reduction Unit models.

A22E Series: Emergency Stop Switches, 22 mm dia.

Use these e-stop switches as part of a Safety Category 4 system.

- Direct opening mechanism opens the circuit when the contact welds.
- Safety lock mechanism prevents operating errors.
- Easily mount and remove Switch Blocks using a lever.
- Mount three Switch Units in series to improve wiring efficiency.
- Finger protection mechanism on Switch Unit provided as a standard feature.
- Install using either round or forked crimp terminals.
- Oil-resistant to IP65



Push-pull



Round Medium
40 mm dia.
Push-pull
A22E-MP



Round Large
60 mm dia.
Push-pull
A22E-LP

Push-lock turn-reset



Round Large
30 mm dia.
Push-lock turn-reset
A22E-S



Round Medium
40 mm dia.
Push-lock turn-reset
A22E-M



Round Large
60 mm dia.
Push-lock turn-reset
A22E-L



Lighted Round
Medium 40 mm dia.
Push-lock turn-reset
A22EL-M

A22E 1 2 3 4 5

1 Lighted/Non-lighted

Code	Description
None	Non-lighted
L	Lighted (See note.)

Note: Lighted Emergency Stop Switches are available only for the medium (M) push-lock turn-reset models.

2 Head Size

Code	Size	Description
MP	Medium 40 dia.	Push-pull
LP	Large 60 dia.	
S	Small 30 dia.	Push-lock turn-reset
M	Medium 40 dia.	
L	Large 60 dia.	
SK	Small 30 dia.	Push-lock key reset
MK	Medium 40 dia.	

3 Light Source

Without Voltage Reduction Unit		
Code	Operating Voltage	
None	Non-lighted	
6D	LED	6 VDC
6A		6 VAC
12A		12 VAC/VDC
24A		24 VAC/VDC
With Voltage Reduction Unit		
None	Non-lighted	
T1	LED	110 VAC
T2		220 VAC

Note: 1. The LED lamp (24 VAC/VDC) can be lit by directly applying 110 VAC/VDC (220 VAC/VDC) to the lamp terminal. LED incorporates the 24 VAC/VDC models.
2. Equipped with 24 VAC/DC LED.

4 Contacts

Code	Description
01	SPSTNC
11	SPSTNO + SPSTNC
02	DPSTNC

Note: 1. Add a "-1" suffix to part number when ordering two contact styles consisting of one contact block.
2. Double contact block types add 18mm in depth and 10 mm in width from single contact types.

5 Configuration

Code	Configuration
None	Switch only
B	Switch with Integrated Control Box

A22S Selector Switches, Non-Lighted, 22 mm dia.

A22W Selector Switches, Lighted, 22 mm dia.


Knob style selector switches provide users a reliable way to start or choose between machine operations. Two- and three-position switches with manual or automatic reset are available in non-lighted and lighted models. Use optional legend plates to identify the selections.



Non-lighted
Selector Switch
A22S



Lighted
Selector Switch
A22W

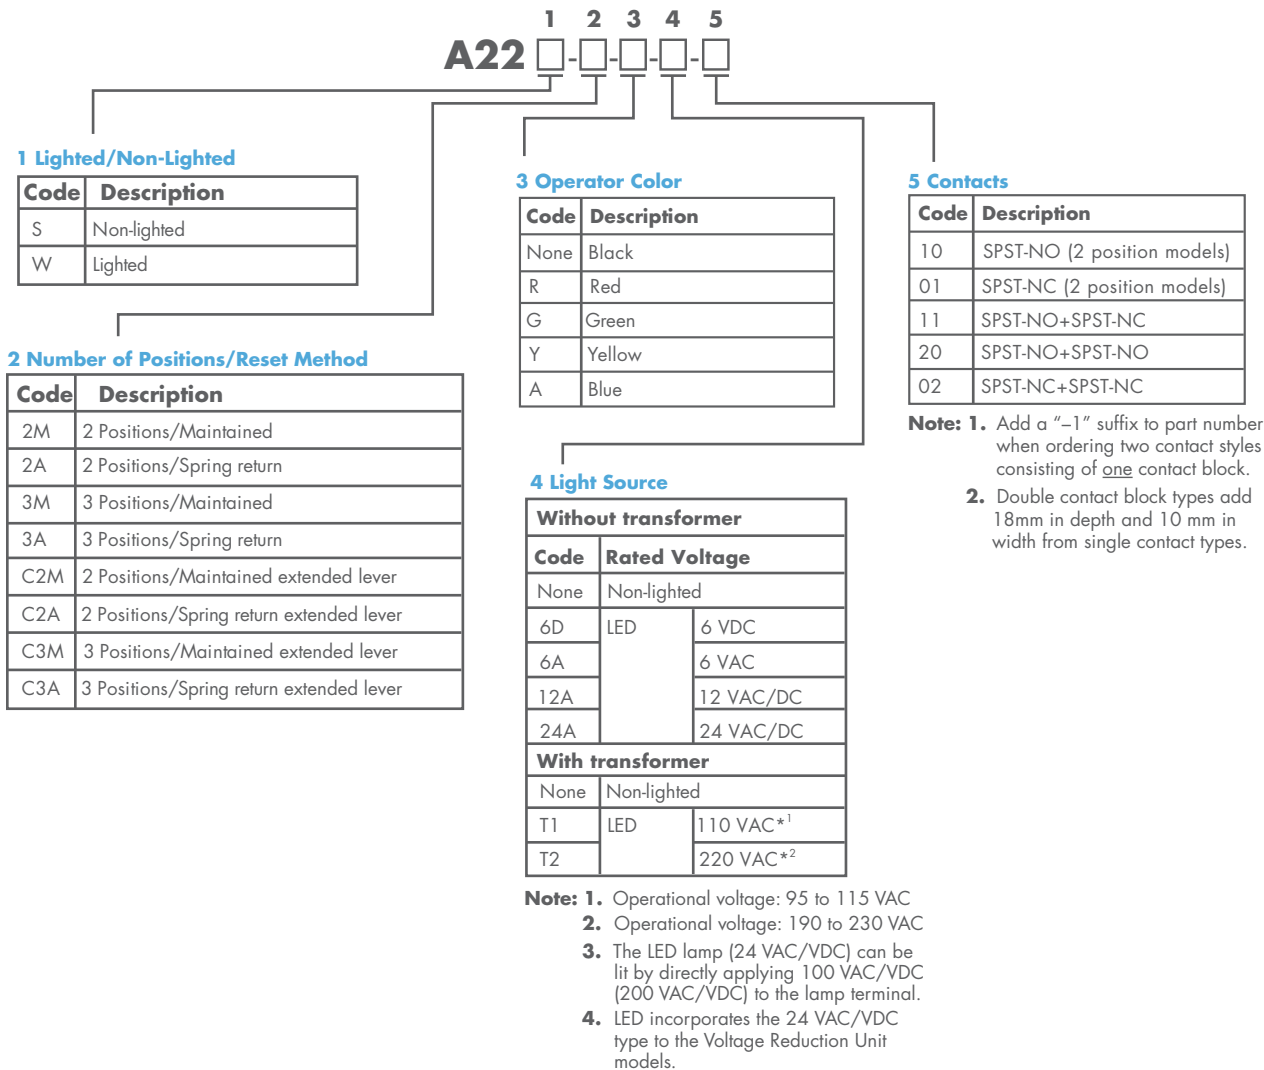


A22K Series: Keyed Selector Switches, 22 mm dia.

Design in extra security with keyed selector switches. Only authorized operators are allowed to change settings using the key.



Keyed selector switch
A22K

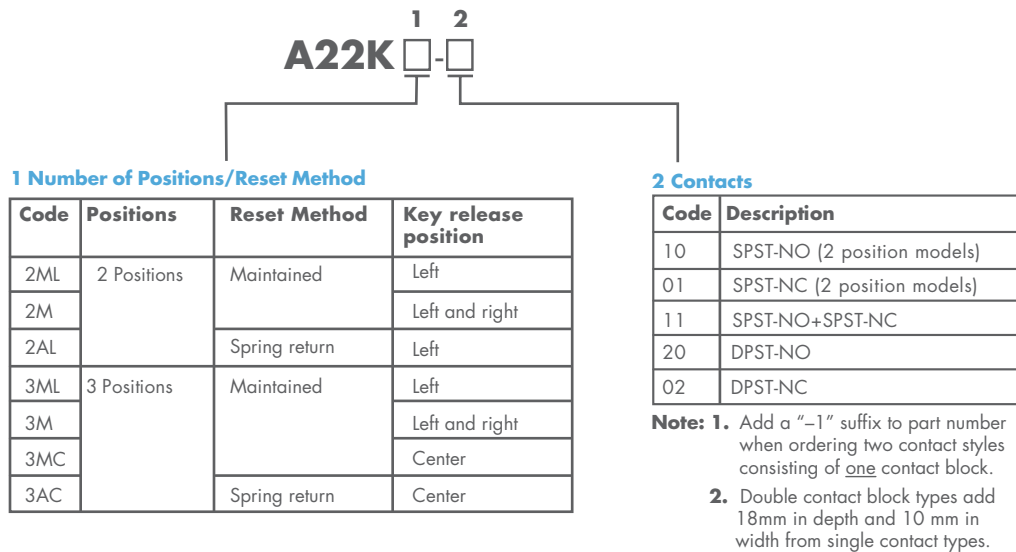

Contact Configurations for Selector Switches A22K, A22S, A22W Models

2 Position Type					
Knob position	SPST-NO	SPST-NC	SPST-NO+SPST-NC	DPST-NO	DPST-NC

3 Position Type			
Knob position	SPST-NO+SPST-NC	DPST-NO	DPST-NC

M22 Series: Pilot Lights, 22 mm dia.


Pilot lights indicate status of machinery and processes on control panels. Bright LED light source is easy to read under most lighting conditions.



Square projection
pilot light
M22-CR



Round flat
pilot light
M22-FR

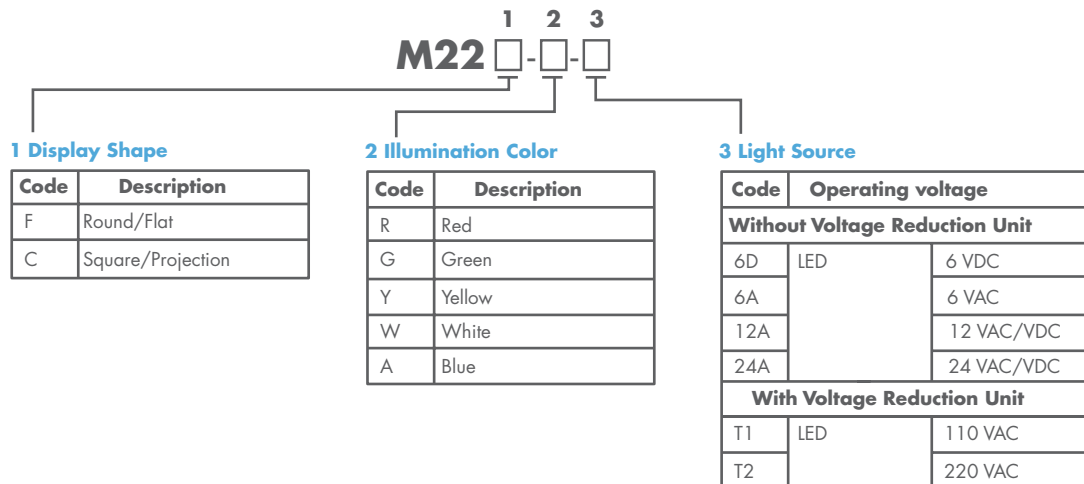

Note: The LED lamp (24 VAC/VDC) can be lit by directly applying 110 VAC/VDC (220 VAC/VDC) to the lamp terminal. LED incorporates the 24 VAC/VDC type.

A16 Series: Overview

Space-saving pushbutton switches offer a wide range of sizes, shapes and colors to match your panel requirements. Lighted models use color LED lamps instead of colored lenses so the switch appears white when unlit and a vivid color when lit. The LED lamp lasts 60 times longer than switches with incandescent lamps, lowering maintenance costs over the life of the machine.



- New Enhanced Brightness
- New Low Current types
- New non-polarized types
- New vivid color options including "Pure White"
- Quick and easy assembly, snap-in switch
- Shapes to match your aesthetic requirements: round, square and rectangular
- Wide range of switching capacity from standard to microload
- High reliability, in standard IP40 and oil-resistant IP65 models
- Short mounting depth, less than 28.5 mm below panel
- Conforms to EN60947-5-1, IEC60947-5-1

Available Styles

Pushbutton Switch, Non-Lighted, IP40
 Pushbutton Switch, Non-Lighted, IP65
 Pushbutton Switch, Lighted, IP40
 Pushbutton Switch, Lighted, IP65
 Emergency Stop Switch, Non-Lighted
 Emergency Stop Switch, Lighted
 Selector Switches, Non-Lighted, IP65
 Selector Switches, Lighted, IP65
 Keyed Selector Switches, IP65
 Pilot Light, IP40
 Pilot Light, IP65
 Buzzer

Series	Page
A16	11
A165	11
A16L	11
A165L	11
A165E	12
A165E-L	12
A165S	13
A165W	13
A165K	14
M16	15
M165	15
M2BJ	15



Automation...simple...powerful.

A16 Series: Pushbutton Switches, 16 mm dia.

These switches deliver the wide range of options to match most of your panel building needs:

- Protection: IP65 oil-resistant models (A165) and standard IP40 models (A16)
- Lighting: Non-lighted (A16 and A165) and lighted (A16L and A165L)

Round



Lit and Unlit Round Projection
A16-T, A16L-T
A165-T, A165L-T



Lighted Round Projection,
110 VAC Transformer
A16L-T-T1
A165L-T-T1



Lighted Round Projection,
220 VAC Transformer
A16L-T-T2
A165L-T-T2

Square



Lit and Unlit Square
2-Way Guard
A16-A, A16L-A,
A165-A, A165L-A



Lighted Square 2-Way
Guard, 110 VAC
Transformer
A16L-A-T1
A165L-A-T1



Lighted Square 2-Way
Guard, 220 VAC
Transformer
A16L-A-T2
A165L-A-T2

Rectangular



Lit and Unlit Rectangular
2-Way Guard
A16-J, A16L-J,
A165-J, A165L-J



Lighted Rectangular
2-Way Guard, 110 VAC
Transformer
A16L-J-T1
A165L-J-T1



Lighted Rectangular
2-Way Guard, 220 VAC
Transformer
A16L-J-T2
A165L-J-T2

A16 **5** **L** **J** **R** **M** **24D** **2**

1 Degree of Protection

Symbol	Protection
None	IP40
5	IP65 oil-resistant

2 Lighted/Non-lighted

Symbol	Type
None	Non-lighted
L	Lighted

3 Shape of Pushbutton

Symbol	Shape
J	Rectangular 2-way guard
A	Square 2-way guard
T	Round Projecting model

4 Color of Pushbutton

Symbol	Color
R	Red
Y	Yellow
PY	Pure yellow
G	Green
W	White
PW	Pure White
A	Blue
B	Black (non-lighted models only)

"Colored-illumination" models operate in the way shown below:
Unlit Lit



The built-in LED is colored.

5 Switch Operation

Symbol	Operation
M	Momentary
A	Alternate

Momentary: Self-resetting.
Alternate: Self-holding.

7 Contact Configuration

Symbol	Type	Terminal
1	SPDT	Solder Terminal
2	DPDT	Solder Terminal
1P	SPDT	PCB Terminal
2P	DPDT	PCB Terminal
2S	DPDT	Screw-Less Clamp

Only DPDT contacts are available with Screw-Less Clamp.

6 Light Source

Symbol	Type	Operating voltage	Rated voltage
None	Non-lighted		
5D	LED	5 ±5% VDC	5 VDC
12D		12 ±5% VAC/VDC	12 VAC/VDC
24D		24 ±5% VAC/VDC	24 VAC/VDC

Voltage Reduction Unit (24-V Built-in LED)

Symbol	Type	Operating voltage	Rated voltage
T1	LED	90 to 121 VAC/VDC	110 VAC
T2		180 to 242 VAC/VDC	220 VAC

- Note:
1. Solder terminals are available only with 100-V models.
 2. The Voltage Reduction Unit is not available for models with PCB terminals.
 3. "T2" is available only for the Screw-Less Clamp type.

A165E Series: Emergency Stop Switches, 16 mm dia.

Use these e-stop switches as part of a Safety Category 4 system.

- Direct opening mechanism to open contacts in emergencies, such as when they are welded.
- Conforms to EN60418.
- Includes a safety lock to prevent misuse.
- Features separate construction that allows the switch to be separated for easier wiring and one-piece-like construction that allows easier handling.
- Models available with 3 contacts built into a single block (A165E-U).



Push-lock
turn-reset




Lighted Round Small
30 mm dia.,
Push-lock turn-reset
A165E-LS



Round Medium
40 mm dia.,
Push-lock turn-reset
A165E-S



Round Medium
40 mm dia.,
Push-lock turn-reset
A165E-M

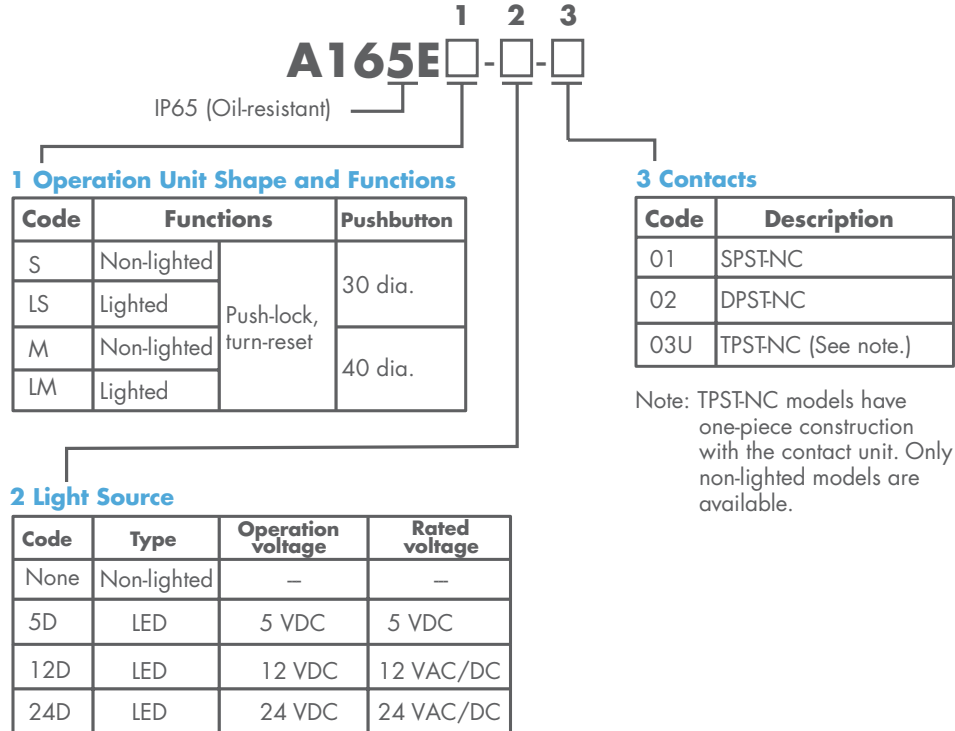

Note: Models with separate construction (SPSTNC and DPSTNC) are for normal loads only. One-piece models (TPSTNC) are for either normal loads or microloads.

A165S Selector Switches, Non-Lighted, 16 mm dia.

A165W Selector Switches, Lighted, 16 mm dia.

Knob style selector switches provide users a reliable way to start or choose between machine operations. Two- and three-position switches with manual or automatic reset are available in non-lighted and lighted models. Use optional legend plates to identify the selections.

Non-Lighted



Square Base
Selector Switch
A165S-A



Rectangular Base
Selector Switch
A165S-J



Round Base
Selector Switch
A165S-T

Lighted



Lighted
Square Base
Selector Switch
A165W-A



Lighted
Rectangular Base
Selector Switch
A165W-J



Lighted
Round Base
Selector Switch
A165W-T

A 165 W - A - 2A R - 24D - 1

1 Lighted/Non-lighted

Symbol	Type
S	Non-lighted
W	Lighted

2 Shape of Selector

Symbol	Shape
J	Rectangular
A	Square
T	Round

3 Number of Notches/Resetting Method

Symbol	No. of notches	Reset method
2M	2 notches	Manual
2A		Automatic
3M	3 notches	Manual
3A		Automatic

4 Color of Selector

Symbol	Color
None	Black (non-lighted models only)
R	Red
G	Green
Y	Yellow

5 Light Source

Symbol	Type
None	Non-lighted
5D	5 VDC LED
12D	12 VAC/DC LED
24D	24 VAC/DC LED

6 Contact Configuration

Symbol	Type	Terminal
1	SPDT	Solder terminal
2	DPDT	
1P	SPDT	PCB terminal
2P	DPDT	
2S	DPDT	Screw-Less Clamp

Note: 1. Only DPDT contacts are available with 3-notch models and Screw-Less Clamp models.

2. PCB terminals are available only with 2-notch models.

Voltage Reduction Unit (24-V Built-in LED)

Symbol	Type	Rated voltage
T1	LED	110 VAC/VDC
T2		220 VAC/VDC

Note: 1. Solder terminals are only available with "T1" 110-V models.

2. The Voltage Reduction Unit is not available for models with PCB terminals.

A165K Series: Keyed Selector Switches, 16 mm dia.

Design in extra security with keyed selector switches. Only authorized operators are allowed to change settings using the key.



Square Base Keyed
Selector Switch
A165K-A



Rectangular Base
Keyed Selector Switch
A165K-J



Round Base Keyed
Selector Switch
A165K-T

A165K-J-3ML-2

1 Shape of Selector

Symbol	Shape	Color
J	Rectangular	Black
A	Square	
T	Round	

2 Number of Notches/Resetting Method

Symbol	No. of notches	Reset method	Key release position
2ML	2 notches	Manual	Left
2MR			Right
2M			Left and right
2AL			Automatic
3MC	3 notches	Manual	Center
3MR			Right
3ML			Left
3M			Left, right, and center
3AC	3 notches	Automatic	Center

3 Contact Configuration

Symbol	Type	Terminal
1	SPDT	Solder Terminal
2	DPDT	Solder Terminal
2S	DPDT	Screw-Less Clamp

Note: 1. Only DPDT contacts are available with 3-notch models.
 2. PCB terminals are available only with 2-notch models.

Contact Configurations for Selector Switches A165K, A165S, A165W Models

2 Position Type			
Knob position	SPDT (SW)	DPDT (SW1)	DPDT (SW2)

3 Position Type		
Knob position	DPDT (SW1)	DPDT (SW2)

2 Position



3 Position



SW

SW1

SW2

Automation...simple...powerful.

M16 Series: Pilot Lights, 16 mm dia.

Pilot lights indicate status of machinery and processes on control panels. Bright LED light source is easy to read under most lighting conditions.

- Easy mounting and removal of socket unit.
- Standard IP40 and oil-resistant IP65 models




Square Pilot Light
M16-A, M165-A



Rectangular Pilot Light
M16-J, M165-J



Round Pilot Light
M16-T, M165-T

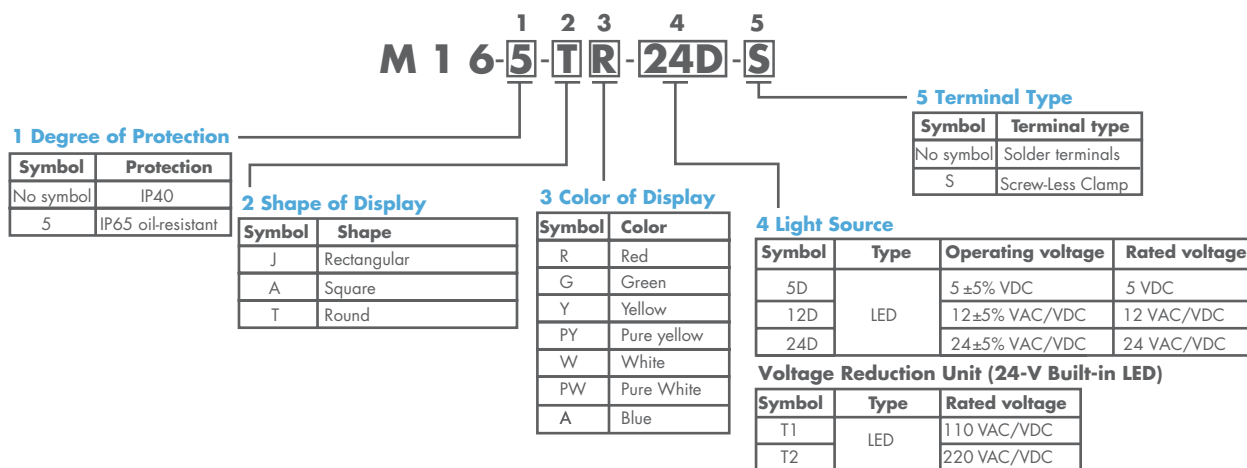

Solder terminals are available only with "T1" 110-V models.

M2BJ Series: Panel-Mounted Buzzer, 16 mm dia.


- Four models offer eight different types of sounds, plus two modes with high-sound output
- Intermittent or continuous sound selected by jumper setting
- Jumper storage provided at bottom of unit
- Complements the A16 range of Pushbuttons, Selector Switches and Key Switches.



Standard Sound Buzzer
M2BJ



High Volume Sound Buzzer
M2BJ-H

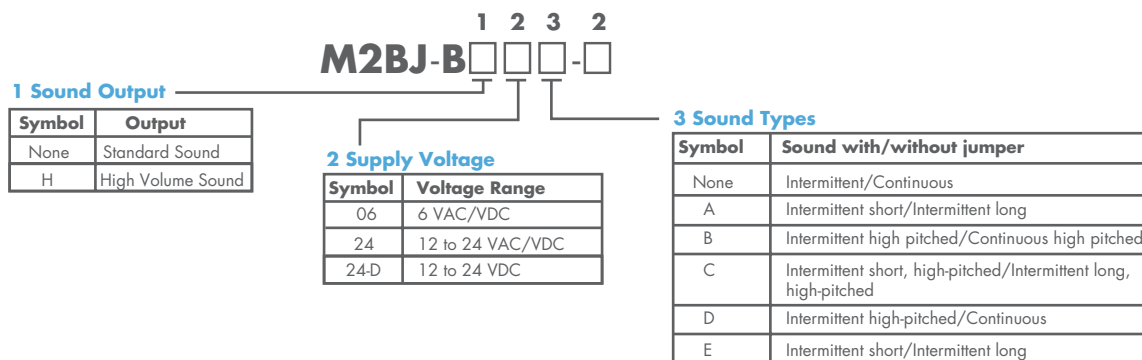

Accessories: 22 mm Switches


Item		Appearance	Classification		Remarks	Part Number
Contact Blocks			SPST-NO	General-purpose load	Provided as standard. Order contact blocks only when adding or replacing them.	A22-10
				Mircoload		A22-10S
			SPST-NC	General-purpose load		A22-01
				Mircoload		A22-01S
		SPST-NO+SPST-NC	General-purpose load	A22-11		
			DPST-NO	General-purpose load		A22-20
		Mircoload		A22-20S		
		DPST-NC	General-purpose load	A22-02		
			Mircoload	A22-02S		
Lamp Sockets		Direct lighting		Used when changing the lighting method.	A22-TN	
		Transformer illumination	110 VAC		A22-T1	
			220 VAC		A22-T2	
		Mounting Latches				For momentary operation models
For maintained operation models				A22-3210		
Legend plate frames	Standard size		With Snap-in Legend Plate (without text)	White	Snap-in legend plate is acrylic.	A22Z-3321
				Red		A22Z-3322
				Black		A22Z-3323
			Without Snap-in Legend Plate			A22Z-3320
	Large size		With Snap-in Legend Plate (without text)	White		A22Z-3331
				Red		A22Z-3332
				Black		A22Z-3333
			Without Snap-in Legend Plate			A22Z-3330
Lock fitting			Round		The body is equipped with a lock fitting. This lock fitting is used when a more secure lock feature is required.	A22Z-3360
Metallic bezel rings			For flush or projection models		Replace with the standard model.	A22Z-3580
			For full-guard models		Material: nickel-plated zinc.	A22Z-3582
Sealing Caps			For flush models		Used to prevent dust or water from entering the operational unit. Color: opaque. Material: silicon.	A22Z-3600F
			For extended models			A22Z-3600T
			For full-guard models			A22Z-3600G
Color lenses			Red		Used for changing the operational unit color of the pushbutton switch.	A22Z-30TR
			Green			A22Z-30TG
			Yellow			A22Z-30TY
			White			A22Z-30TW
			Blue			A22Z-30TA
Three-throw spacers			For Pushbutton Switches		Used when mounting three non-illuminated switch units. Cannot be used with illuminated emergency stop switches.	A22Z-3003
Hole plug			Round		Can be plugged into pre-cut panel holes for future expansion. The color is black. Can be fit into a 25mm dia. hole in the panel.	A22Z-3550
25 mm dia. ring			25 mm ring		Since this is not attached to the main body, order separately.	A22Z-R25

Automation...simple...powerful.

Accessories, 22 mm *continued*

Item		Appearance	Classification		Remarks	Part Number
Snap-in legend plates	Standard size		Without text	Black	Attached to the standard-size legend plate frame. Material: Acrylic.	A22Z-3443B
				Red		A22Z-3443R
				White		A22Z-3443W
				Transparent		A22Z-3443C
			White text on red background	○		A22Z-3443R-2
				STOP		A22Z-3443R-4
			White text on black background			A22Z-3443B-1
				START		A22Z-3443B-3
				ON		A22Z-3443B-5
				OFF		A22Z-3443B-6
				UP		A22Z-3443B-7
				DOWN		A22Z-3443B-8
				POWER ON		A22Z-3443B-9
				OFF-ON		A22Z-3443B-10
	Large size		Without text	Black	Attached to the large-size legend plate frame. Material: Acrylic.	A22Z-3453B
				Red		A22Z-3453R
				White		A22Z-3453W
				Transparent		A22Z-3453C
	For Emergency Stop Switch		60 dia. round plate with black letters on a yellow background		“EMERGENCY STOP” is engraved on the plate. used as an emergency stop switch legend plate.	A22N-PE190
			90 dia. round plate with black letters on a yellow background			A22N-PE191
Character films			No print (Round)		After printing on a film, affix to the indicator plate of the illuminated pushbutton switch (The back is coated with adhesive.)	A22Z-3460
			Character print (Round)			A22Z-3460-1
						A22Z-3460-2
				START		A22Z-3460-3
				STOP		A22Z-3460-4
			No print (Square)			A22Z-3480
Lamp extractor				Rubber tool used to easily replace lamps.	A22Z-3901	
Tightening wrench				Tool used to tighten nuts from the back of the panel.	A22Z-3905	
Lens tightening tool				Used for replacing the cap of the half-guard pushbutton switch.	A22Z-3908	
Lens puller				Used for removing the lens from the indicator of the square lighted pushbutton switch.	A3PJ-5080	

Enclosures

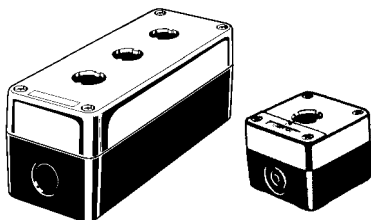

Material	Hole Size	Number of Holes	Part Number
Polycarbonate	22.5 mm (0.88 in)	1	A22Z-B101
		2	A22Z-B102
		3	A22Z-B103
	22.5 mm (0.88 in)	1	A22Z-B101Y*

* Yellow box for emergency stop

Accessories, 22 mm continued


A22 Standard Nameplates

To complete the part number of the standard nameplates, select the plate type and add the number from the table below for the required text.

All plastic nameplates are adhesive backed for easy, permanent installation.

For custom engraved nameplates please use the order form on the next page.


Example: Plastic Square Nameplate
engraved "RESET": A22N-PS38

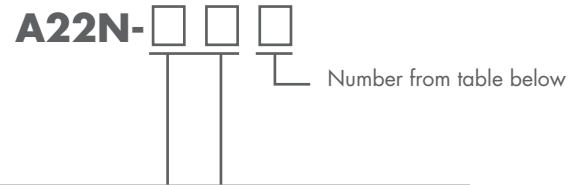

Code	Material/Shape
PR	Plastic Rectangular



Code	Material/Shape
PS	Plastic Square



Code	Material/Shape
PX	Plastic Shield



Code	Material/Shape
MR	Metal Rectangular



All plastic nameplates are supplied standard with white lettering on a black background.

Metal nameplates are brushed aluminum with black lettering.

1	AUTO	26	LOWER	50	3RD SPEED	122	SAFE-RUN	167	OFF-LOC-REMOTE
2	CLOSE	27	MOTOR RUN	51	4TH SPEED	123	SLOW-FAST	168	OFF-MAN-AUTO
3	CYCLE START	28	MOTOR STOP	100	AUTO-MAN	124	START-JOG	169	OFF-SLOW-FAST
4	CYCLE STOP	29	OFF	101	CLOSE-OPEN	125	START-STOP	170	OFF-I-2
5	DECREASE	30	ON	102	DOWN-UP	126	STOP-START	171	OPEN-OFF-CLOSE
6	DOWN	31	OPEN	103	FAST-SLOW	127	SUMMER-WINTER	172	RAISE-OFF-LOWER
8	FAST	32	OUT	104	FOR-REV	128	UP-DOWN	173	SLOW-OFF-FAST
9	FAULT	33	POWER ON	105	HAND-AUTO	150	AUTO-MAN-OFF	174	SLOW-OFF-START
10	FEED	34	PULL TO START	106	HIGH-LOW	151	AUTO-OFF-HAND	175	START-JOG-STOP
11	FEED START	35	PUSH TO TEST	107	INCH-REVERSE	152	AUTO-OFF-MAN	176	START-RUN-STOP
12	FEED STOP	36	PUSH TO STOP	108	JOG-FOR	153	CLOSE-OFF-OPEN	177	UP-OFF-DOWN
13	FLUID LEVEL LOW	37	RAISE	109	JOG-REV	154	DOWN-OFF-SLOW	178	I-OFF-2
14	FORWARD	38	RESET	110	JOG-RUN	155	FAST-OFF-SLOW	179	HAND-OFF-AUTO
15	FULL SPEED	39	REVERSE	111	LEFT-RUN	156	FOR-OFF-REV	180	I
16	HAND	40	RIGHT	112	LOWER-RAISE	157	FOR-STOP-REV	181	II
17	HIGH	41	RUN	113	MAN-AUTO	158	HIGH-LOW-OFF	182	I-O
18	IN	42	SLOW	114	OFF-ON	159	HIGH-OFF-LOW	183	O-I
19	INCH	43	SPEED	115	ON-OFF	160	JOG-SAFE-RUN	184	I-O-II
20	INCREASE	44	START	116	OPEN-CLOSE	161	JOG-STOP-RUN	185	II-I
21	JOG	45	STOP	117	RAISE-LOWER	162	LEFT-OFF-RIGHT	186	I-O-I
22	JOG FORWARD	46	TEST	118	REV-FOR	163	LOC-OFF-HIGH	187	II-III
23	LEFT	47	UP	119	RUN-INCH	164	LOW-OFF-HIGH	188	III
24	LOW	48	1ST SPEED	120	RUN-JOG	165	LOWER-OFF-RAISE	200	BLANK NAMEPLATE
25	LOW SPEED	49	2ND SPEED	121	RUN-SAFE	166	OFF-COOLANT ON		

Emergency Stop Nameplates



A22N-PR7



A22N-PS7



A22N-PX7



A22N-PE190
60 mm diameter



A22N-PE191
90 mm diameter

Automation...simple...powerful.

A22 Custom Engraved Nameplates Order Form

OMRON

Copy this order form and utilize it to specify Custom Engraved Nameplates. Once completed, mail the form to:
Omron Electronics LLC, Attn.: Customer Service, One Commerce Drive, Schaumburg, IL 60173-5302
 Or you may fax this form to either Omron Electronics LLC at: 847.843.8261 or to your local Omron Sales office.

BILL TO:

Date: _____

Company name: _____

Your name: _____

Address: _____

Your signature: _____

City/State/Zip: _____

PO#: _____

Attention: _____

Fax: _____

SHIP TO:

Company name: _____

Address: _____

City/State/Zip: _____

Attention: _____

Phone: _____

To order: Select blank nameplate **Shape** (circle A, B, C, or D). For plastic nameplates - Select **Nameplate Color** (circle Black, Yellow, Red or White). Select **Text Color** (circle Black or White). Note - Metal nameplates are brushed aluminum with black text. All plastic nameplates are adhesive backed.

Fill in the **QUANTITY** box. Print text in the spaces provided as it should appear on the finished nameplate.

A - Plastic Rectangular

 11 characters max.
 2 lines max.

A22N-PR200E
B - Plastic Square

 14 characters max.
 2 lines max.

A22N-PS200E
C - Plastic Shield

 11 characters max.
 2 lines max.

A22N-PX200E
D - Metal Rectangular

 11 characters max.
 2 lines max.

A22N-MR200E


Shape	_____	A	B	C	D	
Nameplate Color	_____	Black	Yellow	Red	White	
Text Color	_____	Black	White			
QUANTITY						

Shape	_____	A	B	C	D	
Nameplate Color	_____	Black	Yellow	Red	White	
Text Color	_____	Black	White			
QUANTITY						

Shape	_____	A	B	C	D	
Nameplate Color	_____	Black	Yellow	Red	White	
Text Color	_____	Black	White			
QUANTITY						

Shape	_____	A	B	C	D	
Nameplate Color	_____	Black	Yellow	Red	White	
Text Color	_____	Black	White			
QUANTITY						

Accessories, 16 mm Switches

Item	Appearance	Classification			Remarks	Part Number
Switch guards		Rectangular			Cannot be used with the dust cover.	A16ZJ-5050
		Square and Round				A16ZA-5050
Dust covers		Rectangular			Cannot be used with the switch guard.	A16ZJ-5060
		Square				A16ZA-5060
		Round				A16ZT-5060
Panel plugs		Rectangular			Used for covering the panel cutouts for future panel expansion.	A3BJ-3003
		Square				A3BA-3003
		Round				A3BT-3003
Legend panels		Rectangular	IP40	Opaque	A single legend panel (transparent) is included with a standard model. The opaque legend panel can be used with the IP40 and the oil-resistant IP65.	A16ZJ-5204
				Transparent		A16ZJ-5202
			Oil-resistant IP65	Opaque		A16ZJ-5204
				Transparent		A16ZJ-5203
		Square	IP40	Opaque		A16ZA-5204
				Transparent		A16ZA-5202
			Oil-resistant IP65	Opaque		A16ZA-5204
				Transparent		A16ZA-5203
		Round	IP40	Opaque		A16ZT-5204
				Transparent		A16ZT-5202
			Oil-resistant IP65	Opaque		A16ZT-5204
				Transparent		A16ZT-5203
Color caps (for IP40)		LED indicator/ Non-lighted		White	Insert one of the following letters into the box (□). J: Rectangular A: Square T: Round The color cap is supplied. Replace the cap if the color is to be changed. When using an LED indicator, be sure to use a color cap that matches the luminescent color of the LED. The materials used for the IP40 and oil-resistant IP65 are different, so be sure to use a color cap that matches the specifications of the switch.	A16Z□-5001W
				Red		A16Z□-5001R
				Yellow		A16Z□-5001Y
		LED indicator		Green		A16Z□-5001GY
				Blue		A16Z□-5001A
		Non-lighted		Green		A16Z□-5001G
				Black		A16Z□-5011B
		Color caps (for oil-resistant IP65)		LED indicator/ Non-lighted		White
Red	A16Z□-5101R					
Yellow	A16Z□-5101Y					
LED indicator				Green		A16Z□-5101GY
				Blue		A16Z□-5101A
Non-lighted				Green		A16Z□-5101G
				Black		A16Z□-5111B

Item	Appearance	Applicable types					Remarks	Part number
		Pushbutton Switch	Knob-type Selector Switch	Key-type Selector Switch	E-Stop Switch	Indicator		
Pushbutton switch extractor		Yes	No	No	No	Yes	Convenient for extracting pushbutton switches.	A3PJ-5080
Screw fitting		Yes	Yes	Yes	Yes	Yes	Convenient for ganged installation. Tighten to a torque of 0.39 N • (5 kgf • cm) min.	A16Z-3004
Lamp unit extractor		Yes	Yes	Yes	Yes	Yes	Convenient for extracting the switch unit and lamps.	A16Z-5080

Automation...simple...powerful.

Accessories, 16 mm *continued*


A16 Standard Nameplates

To complete the part number of the standard nameplates, select the plate type and add the number from the table below for the required text.

All plastic nameplates are adhesive backed for easy, permanent installation.

For custom engraved nameplates please use the order form on the next page.

Example: Plastic Square Nameplate
engraved "RESET": A16N-PS38

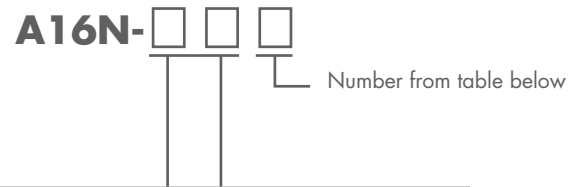

Code	Material/Shape
PR	Plastic Rectangular



Code	Material/Shape
PS	Plastic Square



Code	Material/Shape
PX	Plastic Shield



Code	Material/Shape
MR	Metal Rectangular



All plastic nameplates are supplied standard with white lettering on a black background.

Metal nameplates are brushed aluminum with black lettering.

1 AUTO	26 LOWER	50 3RD SPEED	122 SAFE-RUN	167 OFF-LOC-REMOTE
2 CLOSE	27 MOTOR RUN	51 4TH SPEED	123 SLOW-FAST	168 OFF-MAN-AUTO
3 CYCLE START	28 MOTOR STOP	100 AUTO-MAN	124 START-JOG	169 OFF-SLOW-FAST
4 CYCLE STOP	29 OFF	101 CLOSE-OPEN	125 START-STOP	170 OFF-I-2
5 DECREASE	30 ON	102 DOWN-UP	126 STOP-START	171 OPEN-OFF-CLOSE
6 DOWN	31 OPEN	103 FAST-SLOW	127 SUMMER-WINTER	172 RAISE-OFF-LOWER
8 FAST	32 OUT	104 FOR-REV	128 UP-DOWN	173 SLOW-OFF-FAST
9 FAULT	33 POWER ON	105 HAND-AUTO	150 AUTO-MAN-OFF	174 SLOW-OFF-START
10 FEED	34 PULL TO START	106 HIGH-LOW	151 AUTO-OFF-HAND	175 START-JOG-STOP
11 FEED START	35 PUSH TO TEST	107 INCH-REVERSE	152 AUTO-OFF-MAN	176 START-RUN-STOP
12 FEED STOP	36 PUSH TO STOP	108 JOG-FOR	153 CLOSE-OFF-OPEN	177 UP-OFF-DOWN
13 FLUID LEVEL LOW	37 RAISE	109 JOG-REV	154 DOWN-OFF-SLOW	178 1-OFF-2
14 FORWARD	38 RESET	110 JOG-RUN	155 FAST-OFF-SLOW	179 HAND-OFF-AUTO
15 FULL SPEED	39 REVERSE	111 LEFT-RUN	156 FOR-OFF-REV	180 I
16 HAND	40 RIGHT	112 LOWER-RAISE	157 FOR-STOP-REV	181 II
17 HIGH	41 RUN	113 MAN-AUTO	158 HIGH-LOW-OFF	182 I-O
18 IN	42 SLOW	114 OFF-ON	159 HIGH-OFF-LOW	183 O-I
19 INCH	43 SPEED	115 ON-OFF	160 JOG-SAFE-RUN	184 I-O-II
20 INCREASE	44 START	116 OPEN-CLOSE	161 JOG-STOP-RUN	185 I-II
21 JOG	45 STOP	117 RAISE-LOWER	162 LEFT-OFF-RIGHT	186 I-O-I
22 JOG FORWARD	46 TEST	118 REV-FOR	163 LOC-OFF-HIGH	187 I-II-III
23 LEFT	47 UP	119 RUN-INCH	164 LOW-OFF-HIGH	188 III
24 LOW	48 1ST SPEED	120 RUN-JOG	165 LOWER-OFF-RAISE	200 BLANK NAMEPLATE
25 LOW SPEED	49 2ND SPEED	121 RUN-SAFE	166 OFF COOLANT ON	

Emergency Stop Nameplates



A16N-PR7



A16N-PS7



A16N-PX7



A16N-PE190
60 mm diameter



A16N-PE191
90 mm diameter

A16 Custom Engraved Nameplates Order Form

OMRON

Copy this order form and utilize it to specify Custom Engraved Nameplates. Once completed, mail the form to:
Omron Electronics LLC, Attn.: Customer Service, One Commerce Drive, Schaumburg, IL 60173-5302
 Or you may fax this form to either Omron Electronics LLC at: 847.843.8261 or to your local Omron Sales office.

BILL TO:

Date: _____
 Company name: _____ Your name: _____
 Address: _____ Your signature: _____
 City/State/Zip: _____ PO#: _____
 Attention: _____ Fax: _____

SHIP TO:

Company name: _____
 Address: _____
 City/State/Zip: _____
 Attention: _____ Phone: _____

To order: Select blank nameplate **Shape** (circle A, B, C, or D). For plastic nameplates - Select **Nameplate Color** (circle Black, Yellow, Red or White). Select **Text Color** (circle Black or White). Note - Metal nameplates are brushed aluminum with black text. All plastic nameplates are adhesive backed.

Fill in the **QUANTITY** box. Print text in the spaces provided as it should appear on the finished nameplate.

A - Plastic Rectangular

11 characters max.
2 lines max.


A16N-PR200E
B - Plastic Square

14 characters max.
2 lines max.


A16N-PS200E
C - Plastic Shield

11 characters max.
2 lines max.


A16N-PX200E
D - Metal Rectangular

11 characters max.
2 lines max.


A16N-MR200E

Shape _____	A	B	C	D	QUANTITY
Nameplate Color	Black	Yellow	Red	White	
Text Color _____	Black	White			

Shape _____	A	B	C	D	QUANTITY
Nameplate Color	Black	Yellow	Red	White	
Text Color _____	Black	White			

Shape _____	A	B	C	D	QUANTITY
Nameplate Color	Black	Yellow	Red	White	
Text Color _____	Black	White			

Shape _____	A	B	C	D	QUANTITY
Nameplate Color	Black	Yellow	Red	White	
Text Color _____	Black	White			



OMRON ELECTRONICS LLC • THE AMERICAS HEADQUARTERS

Schaumburg, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron.ca

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON ELECTRONICS MEXICO SA DE CV • HEAD OFFICE

Apodaca, N.L. • 52.811.156.99.10 • 001.800.556.6766 • mela@omron.com

OMRON ARGENTINA • SALES OFFICE

Cono Sur • 54.11.4783.5300

OMRON CHILE • SALES OFFICE

Santiago 56.9.9917.3920

OTHER OMRON LATIN AMERICA SALES

54.11.4783.5300

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[A16N-PR166](#) [A16N-MR1](#) [A16N-MR10](#) [A16N-MR100](#) [A16N-MR101](#) [A16N-MR102](#) [A16N-MR103](#) [A16N-MR104](#)
[A16N-MR105](#) [A16N-MR106](#) [A16N-MR107](#) [A16N-MR108](#) [A16N-MR109](#) [A16N-MR11](#) [A16N-MR110](#) [A16N-MR111](#)
[A16N-MR112](#) [A16N-MR113](#) [A16N-MR114](#) [A16N-MR115](#) [A16N-MR116](#) [A16N-MR117](#) [A16N-MR118](#) [A16N-MR119](#)
[A16N-MR12](#) [A16N-MR120](#) [A16N-MR121](#) [A16N-MR122](#) [A16N-MR123](#) [A16N-MR124](#) [A16N-MR125](#) [A16N-MR126](#)
[A16N-MR127](#) [A16N-MR128](#) [A16N-MR13](#) [A16N-MR14](#) [A16N-MR15](#) [A16N-MR150](#) [A16N-MR151](#) [A16N-MR152](#)
[A16N-MR153](#) [A16N-MR154](#) [A16N-MR155](#) [A16N-MR156](#) [A16N-MR157](#) [A16N-MR158](#) [A16N-MR159](#) [A16N-MR16](#)
[A16N-MR160](#) [A16N-MR161](#) [A16N-MR162](#) [A16N-MR163](#) [A16N-MR164](#) [A16N-MR165](#) [A16N-MR166](#) [A16N-MR167](#)
[A16N-MR168](#) [A16N-MR169](#) [A16N-MR17](#) [A16N-MR170](#) [A16N-MR171](#) [A16N-MR172](#) [A16N-MR173](#) [A16N-MR174](#)
[A16N-MR175](#) [A16N-MR176](#) [A16N-MR177](#) [A16N-MR178](#) [A16N-MR179](#) [A16N-MR18](#) [A16N-MR180](#) [A16N-MR181](#)
[A16N-MR182](#) [A16N-MR183](#) [A16N-MR184](#) [A16N-MR185](#) [A16N-MR186](#) [A16N-MR187](#) [A16N-MR188](#) [A16N-MR19](#)
[A16N-MR2](#) [A16N-MR20](#) [A16N-MR200E](#) [A16N-MR21](#) [A16N-MR22](#) [A16N-MR23](#) [A16N-MR24](#) [A16N-MR25](#) [A16N-](#)
[MR26](#) [A16N-MR27](#) [A16N-MR28](#) [A16N-MR29](#) [A16N-MR3](#) [A16N-MR30](#) [A16N-MR31](#) [A16N-MR32](#) [A16N-MR33](#)
[A16N-MR34](#) [A16N-MR35](#) [A16N-MR36](#)