


## Engineer

drawing

| PART NO.    | JTL-301                  | WIRE | SCALE | 1 : 1 |
|-------------|--------------------------|------|-------|-------|
| DESCRIPTION | SJT#18-3C 60C SHIELDED   |      |       |       |
| DWG. No.    | 800-1801-0-SJT0-BL-00300 |      |       | mm    |

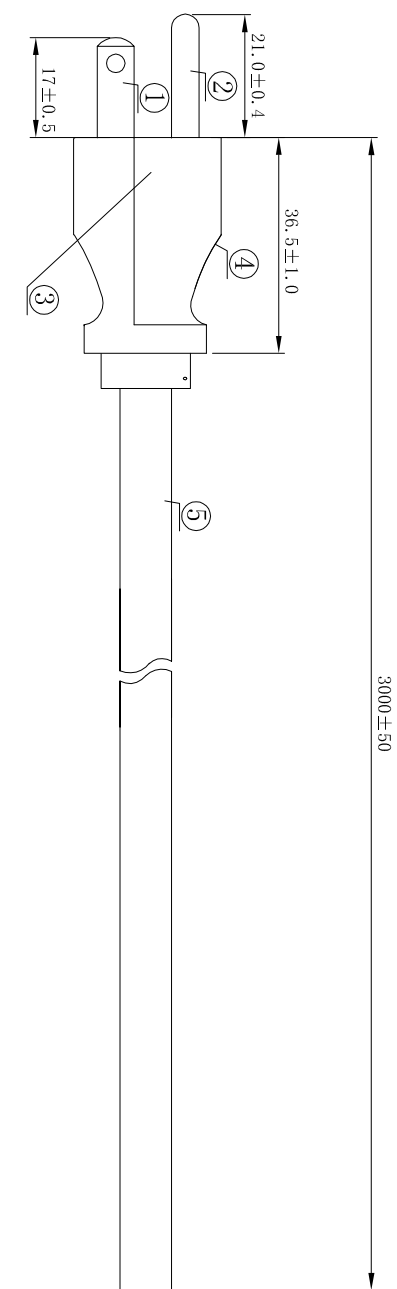


|                                   |              |
|-----------------------------------|--------------|
| CONDUCTOR CONSTRUCTION (N/mm):    | 41/0.16AS    |
| PVC INSULATION AVERAGE THICKNESS: | 0.76mm       |
| ID:                               | 2.80 ± 0.1mm |
| Fill                              |              |
| Wrapping                          |              |

- |                                               |           |
|-----------------------------------------------|-----------|
| CONDUCTOR CONSTRUCTION (N/mm):                | 41/0.16AS |
| PVC INSULATION AVERAGE THICKNESS:             | 0.76mm    |
| ID: 2.80 ± 0.1mm                              |           |
| Fill                                          |           |
| Wrapping                                      |           |
| Aluminum/Mylar(Conducting Face drainage wire) |           |
| Drain wire                                    |           |
| 16/0.16TR                                     |           |

|                                                  |             |
|--------------------------------------------------|-------------|
| CONDUCTOR CONSTRUCTION (N/mm):                   | 41/0, 16AS  |
| PVC INSULATION AVERAGE THICKNESS:                | 0.76mm      |
| ID: 2.80 ± 0.1mm                                 |             |
| Fill                                             |             |
| Wrapping                                         |             |
| Aluminum/Mylar (Conducting Fabric drainage wire) |             |
| Drain wire                                       | 16/0, 161XR |
| PVC JACKET AVERAGE THICKNESS:                    | 0.76mm      |
| OD: 8.80 ± 0.15mm                                |             |

- |                                                |                   |
|------------------------------------------------|-------------------|
| CONDUCTOR CONSTRUCTION (V/mm) :                | 41/0, 16AS        |
| PVC INSULATION AVERAGE THICKNESS: 0.76mm       | ID: 2.80 ± 0.1mm  |
| Fill                                           |                   |
| Wrapping                                       |                   |
| Aluminum/Mylar (Conducting F<br>drainage wire) |                   |
| Drain wire                                     | 16/0, 16TYR       |
| PVC JACKET AVERAGE THICKNESS: 0.76mm           | OD: 8.80 ± 0.15mm |

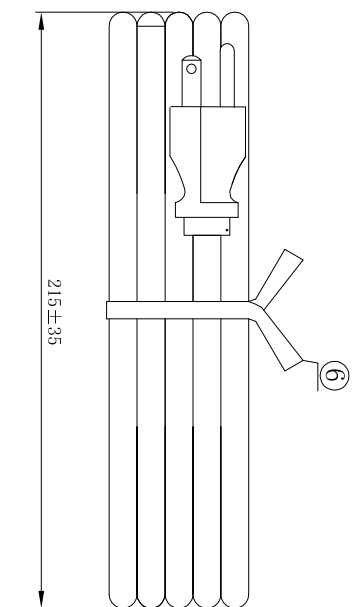

| SPECIFICATION |                          |  |  | COLOUR | MATERIAL | AMOUNT |
|---------------|--------------------------|--|--|--------|----------|--------|
| NO.           |                          |  |  |        |          |        |
| ①             | Load terminals 98661     |  |  | Silver | Cu       | 2P     |
| ②             | Grounding terminal 97475 |  |  | Silver | Cu       | 1P     |
| ③             | Model aircraft 8661AN-3P |  |  | WHITE  | PBT      | 1PCS   |
| ④             | Plug JUL-301             |  |  | BLACK  | PVC Cu   | 1PCS   |
| ⑤             | Wire SJT 18AWG/3C 60°C   |  |  | BLACK  | PVC Cu   | 1PCS   |
| ⑥             | Ties                     |  |  | BLACK  |          | 1PCS   |