


DESCRIPTION: COAXIAL / SIGNAL - SOLDER CUP - FEMALE

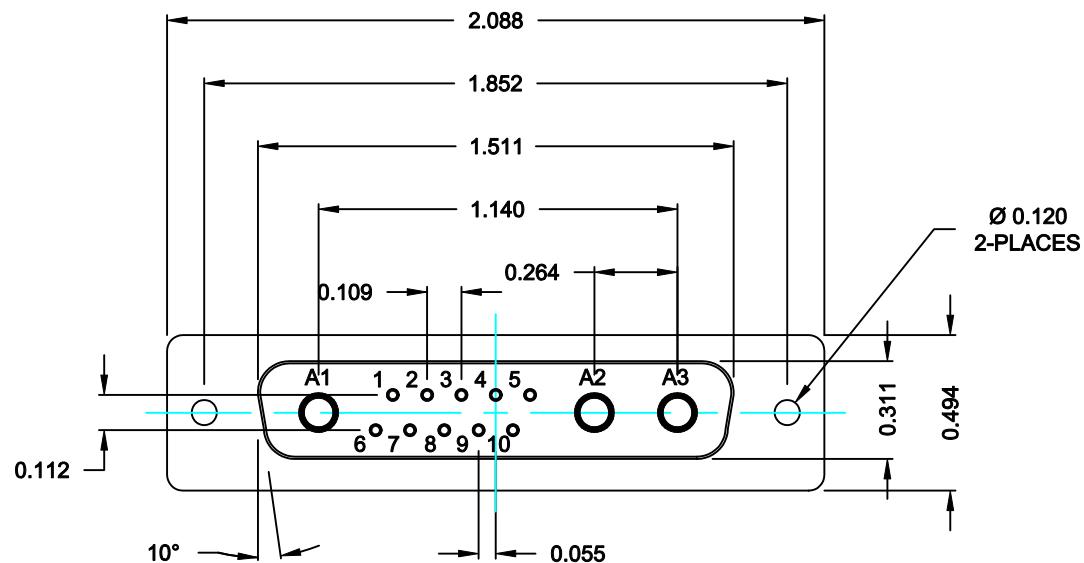

SPECIFICATIONS:

ELECTRICAL:

INSULATOR RESISTANCE: 5,000 MegOHMS Min.
DIELECTRIC WITHSTANDING: 1,000VAC r.m.s.
OPERATING TEMPERATURE: -55° C ~ +125° C
CONTACT RESISTANCE: 30 MillioHMS Max.
COAXIAL PINS: 50 OHM
SIGNAL PINS: 3 AMPS

MECHANICAL:

CONTACT INSERTION FORCE: 4.5 Kg Max.
CONTACT SEPARATOR FORCE: 0.3Kg Min.

MATERIALS:


CONTACTS: BRASS
INSULATOR: PBT UL94V-0 RATED,
230°C PROCESS TEMP.
SHELL: STEEL

FINISH:

SHELL: NICKEL

68213W3203L001

00 = 50 OHM COAXIAL

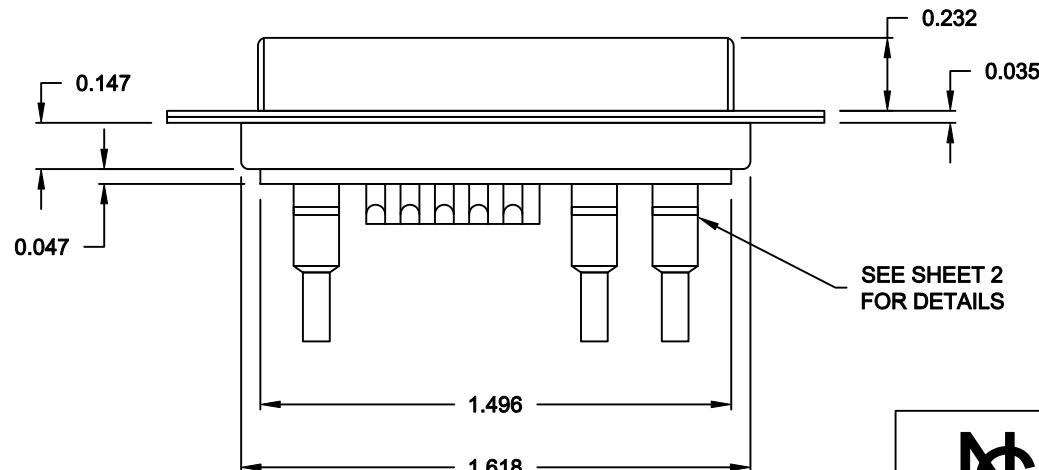

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF NorComp AND
SHALL NOT BE REPRODUCED, COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OF SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH DATE: 09-21-06


CHECKED: DATE:

SCALE: N.T.S. SHEET OF 1 2 REV 4


DWG NO. 68213W3203L001

NorComp

NOTE:
SIGNAL CONTACTS COME PRE-LOADED INTO INSULATORS.
COAXIAL CONTACTS SUPPLIED - NOT PRE-LOADED.

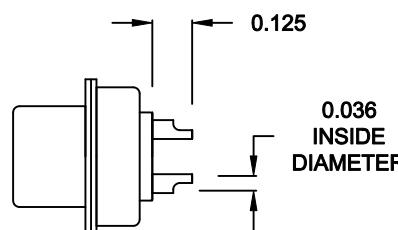

SIGNAL CONTACTS
ACCEPTS UP TO 20 AWG WIRE

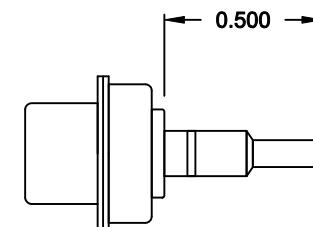

COAXIAL CONTACT
ACCEPTS 50 OHM COAX, RG316/RG174



FEMALE COAXIAL CONTACT



MALE COAXIAL CONTACT

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF NorComp AND
SHALL NOT BE REPRODUCED, COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OF SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

DRAWN:
C. SMITH

DATE:
09-21-06

CHECKED:

DATE:

NorComp

SCALE: N.T.S. SHEET OF 2 2 REV 4

DWG NO. 68213W3203L001