

DESCRIPTION The 2SA1175 is designed for use in driver stage of AF amplifier.

- FEATURES**
- High h_{FE} and excellent linearity : 200 TYP.
 h_{FE} ($I_C = -1.0$ mA)
 - Complementary to the NEC 2SC2785 NPN transistor.

ABSOLUTE MAXIMUM RATINGS

Maximum Temperatures

Storage Temperature -55 to $+150$ °C

Junction Temperature $+150$ °C Maximum

Maximum Power Dissipation ($T_a = 25$ °C)

Total Power Dissipation 250 mW

Maximum Voltages and Currents ($T_a = 25$ °C)

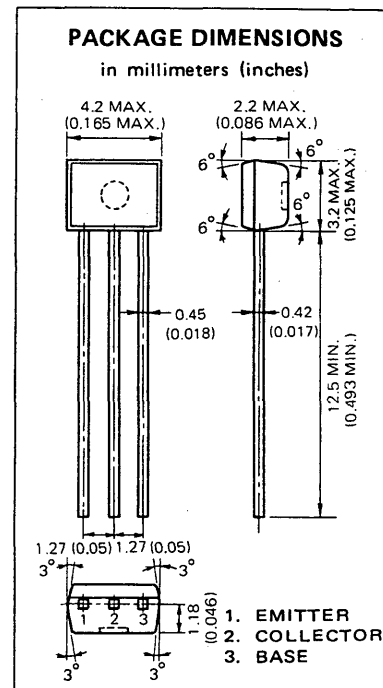
V_{CBO} Collector to Base Voltage -60 V

V_{CEO} Collector to Emitter Voltage -50 V

V_{EBO} Emitter to Base Voltage -5.0 V

I_C Collector Current -100 mA

I_B Base Current -20 mA












ELECTRICAL CHARACTERISTICS ($T_a = 25$ °C)

SYMBOL	CHARACTERISTIC	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
h_{FE}	DC Current Gain	110	200	600	—	$V_{CE} = -6.0$ V, $I_C = -1.0$ mA
NF	Noise Figure		6.0	20	dB	$V_{CE} = -6.0$ V, $I_C = -0.3$ mA, $R_G = 10$ k Ω , $f = 100$ Hz
f_T	Gain Bandwidth Product	50	180		MHz	$V_{CE} = -6.0$ V, $I_E = -1.0$ mA
C_{ob}	Output Capacitance		4.5	6.0	pF	$V_{CB} = -10$ V, $I_E = 0$, $f = 1.0$ MHz
I_{CBO}	Collector Cutoff Current			-0.1	μ A	$V_{CB} = -60$ V, $I_E = 0$
I_{EBO}	Emitter Cutoff Current			-0.1	μ A	$V_{EB} = -5.0$ V, $I_C = 0$
V_{BE}	Base to Emitter Voltage	-0.58	-0.62	-0.68	V	$V_{CE} = -6.0$ V, $I_C = -1.0$ mA
$V_{CE(sat)}$	Collector Saturation Voltage		-0.18	-0.3	V	$I_C = -100$ mA, $I_B = -10$ mA


Classification of h_{FE}

Rank	RF	JF	HF	FF	EF	KF
Range	110 — 180	135 — 220	170 — 270	200 — 320	250 — 400	300 — 600

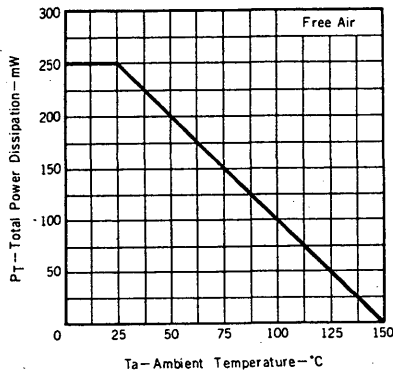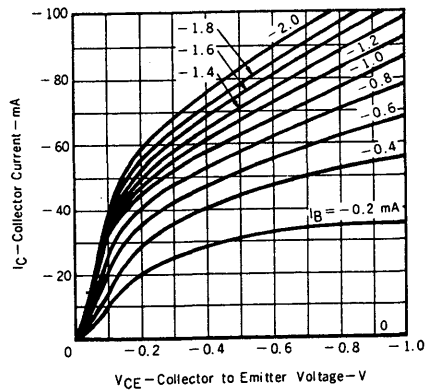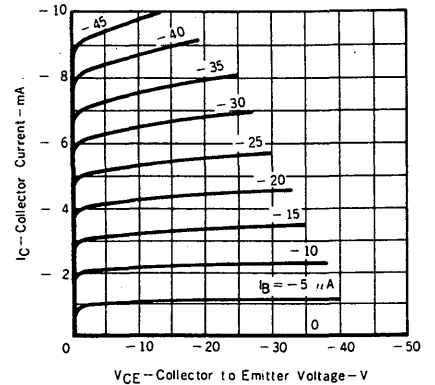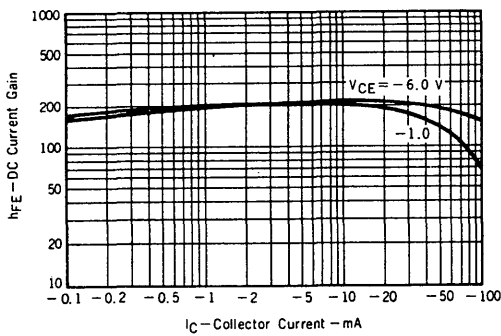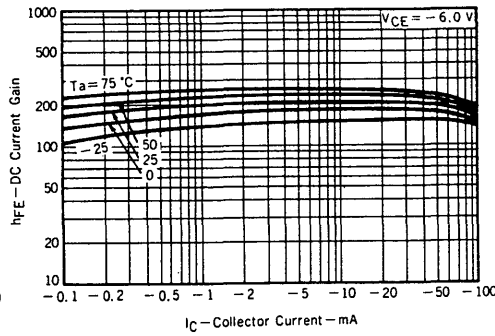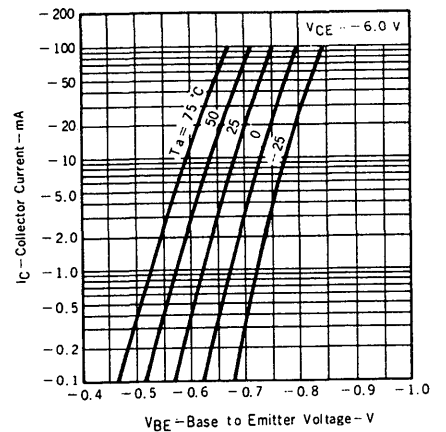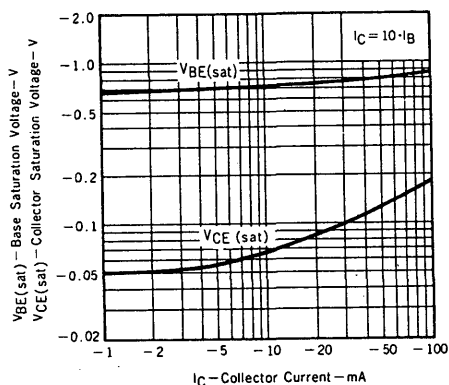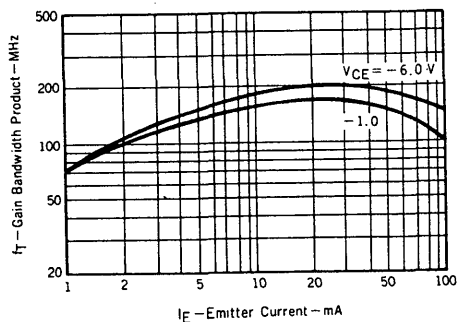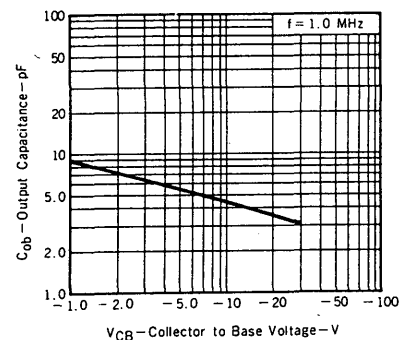
h_{FE} Test Conditions: $V_{CE} = -6.0$ V, $I_C = -1.0$ mA

TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$ unless otherwise noted)TOTAL POWER DISSIPATION
vs. AMBIENT TEMPERATURECOLLECTOR CURRENT vs.
COLLECTOR TO EMITTER VOLTAGECOLLECTOR CURRENT vs.
COLLECTOR TO EMITTER VOLTAGEDC CURRENT GAIN
vs. COLLECTOR CURRENTDC CURRENT GAIN
vs. COLLECTOR CURRENTCOLLECTOR CURRENT vs.
BASE TO EMITTER VOLTAGECOLLECTOR AND BASE SATURATION
VOLTAGE vs. COLLECTOR CURRENTGAIN BANDWIDTH PRODUCT
vs. EMITTER CURRENTOUTPUT CAPACITANCE
vs. REVERSE VOLTAGE

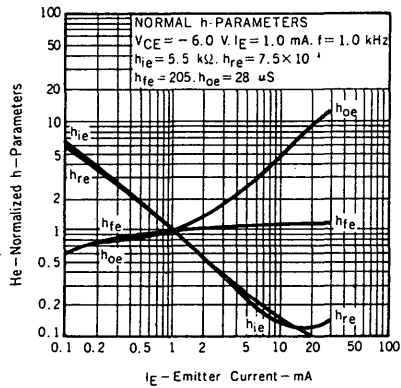
NORMALIZED h-PARAMETERS
vs. EMITTER CURRENT



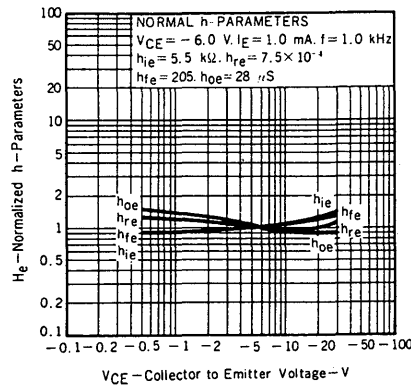
NORMALIZED h-PARAMETERS vs.
COLLECTOR TO EMITTER VOLTAGE




NOISE FIGURE MAP 1

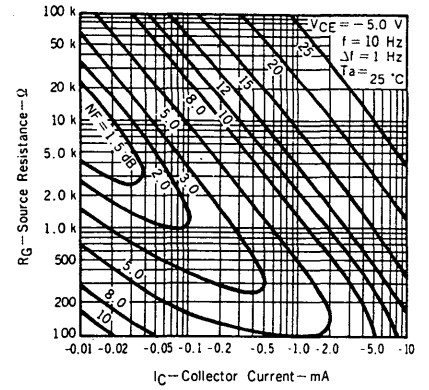

NOISE FIGURE MAP 2

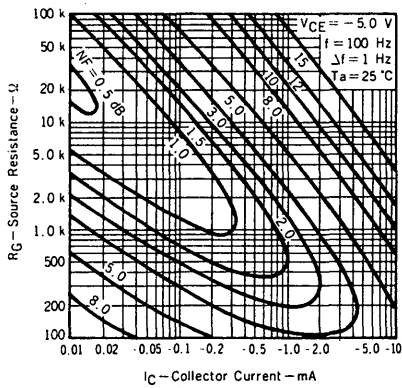

NOISE FIGURE MAP 3

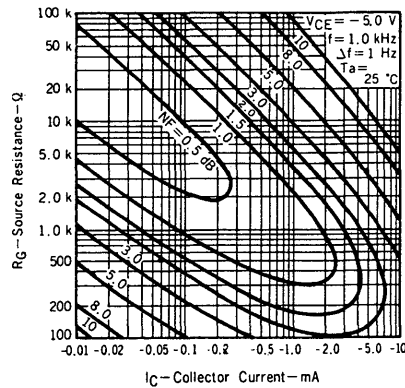

NOISE FIGURE MAP 4

