



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
CM	0		N1	REVISED PER ECO-11-004917	11MAR11	RK HMR

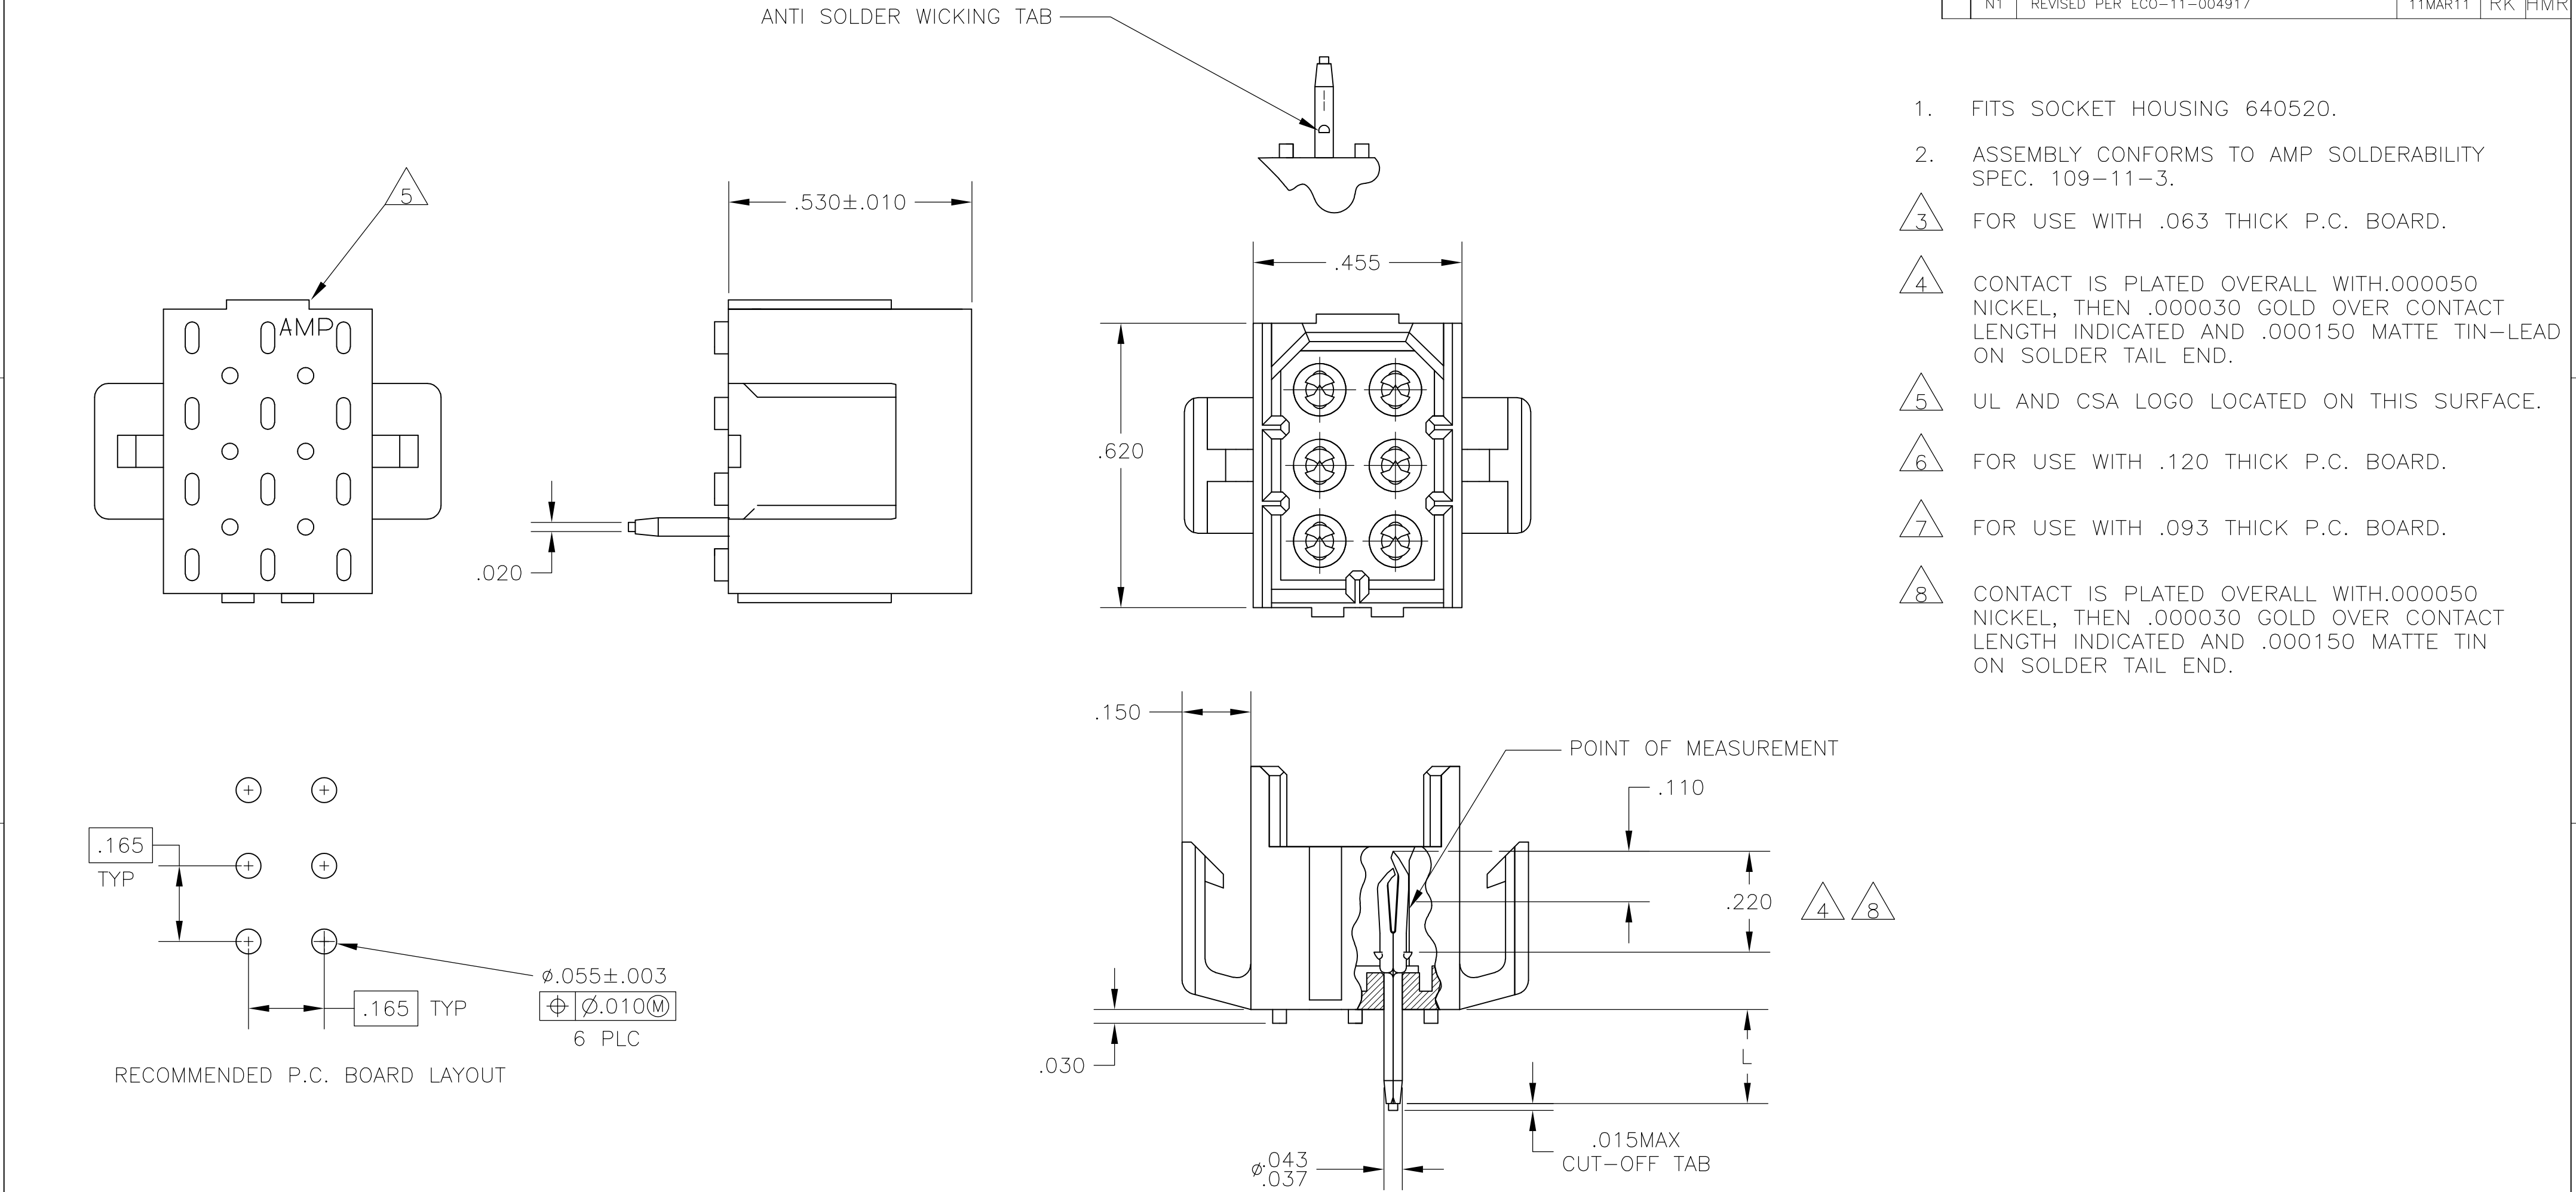

.010	0.25	.055	1.40	.210	5.33		
.008	0.20	.043	1.09	.180	4.57	-	-
.005	0.13	.037	0.94	.165	4.19	.620	15.75
.003	0.08	.030	0.76	.150	3.81	.530	13.46
.000050	0.00127	.020	0.51	.110	2.79	.455	11.56
.000030	0.00076	.015	0.38	.063	1.60	.220	5.59
IN	MM	IN	MM	IN	MM	IN	MM
CONVERSION TABLE							

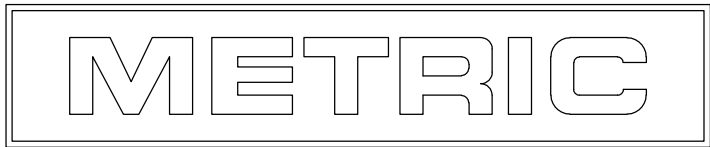

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. HUFFMAN 28APR98	TE Connectivity			
DIMENSIONS: INCHES		CHK R. SWING 28APR98				
		APVD T. BEDDICK 28APR98	NAME			
		PRODUCT SPEC	HEADER ASSEMBLY, PIN, 6 POSITION, MR.			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	-			
MATERIAL HOUSING:FLAME RETARDANT NYLON UL 94V-0 PIN:.008 PH. BRZ.		WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C=640500	RESTRICTED TO -
FINISH SEE TABLE		CUSTOMER DRAWING	SCALE 4:1	SHEET 1 of 1	REV N1	