


A. Electrical Specifications ($T_a = +25^\circ\text{C}$)

1. Rated Voltage:
250V AC 50/60 Hz
2. Rated Current: 2.0A AC
3. Inductance (@ 1 KHz 1V): 3.3 mH MIN
4. Insulation Resistance:
DC 500V 100M Ω MIN
Between Winding to Winding
Between Winding to Core
5. Hi-Pot Test:
Winding to Winding AC 2.0 KV
Winding to Core
6. DC Resistance: 0.17 Ω MAX


B. Marking: 8033 and date code

C. Schematic Diagram:

WDG1 WDG2

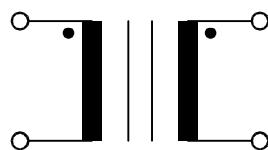

D. Mechanical Specifications:

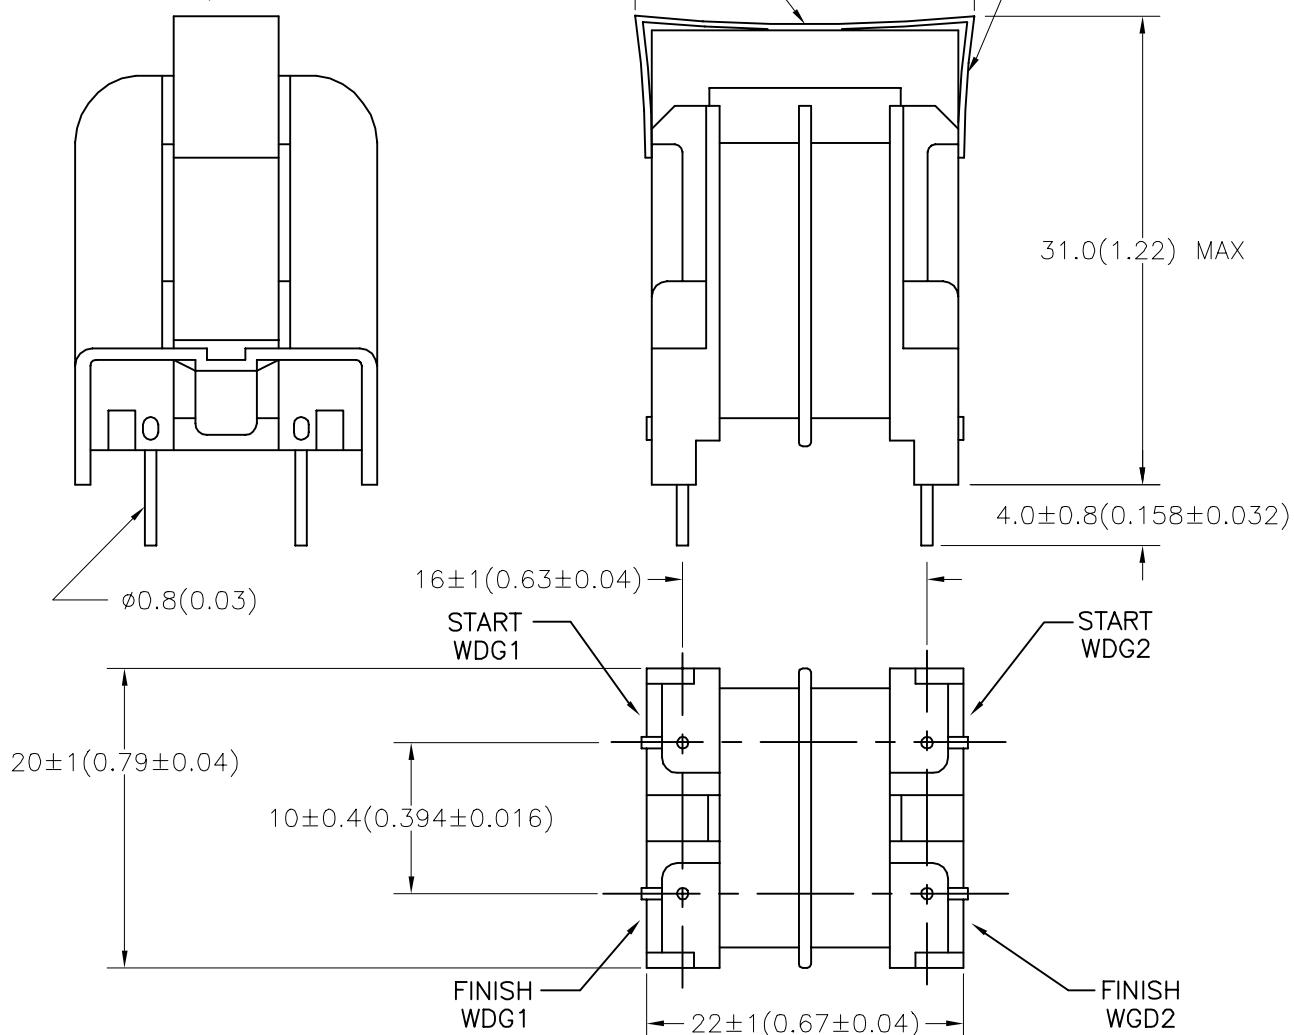

TOLERANCES (mm)	
\leq	4 ± 0.2
$4 \leq$	20 ± 0.3
$20 \leq$	50 ± 0.4

PREPARED BY:

K. Brennan

ENGINEER:

T. Shiozawa

QUALITY CONTROL:

V. Casey

APPROVED:

DWG CONTROL NO. REV
P-A4-11533
ACAD\MXFMR\A4115331.DWG —

COIL

COMMON MODE

CMF-8033

MODEL SPECIFICATION

DIM: mm(in) SCL: 2/1 SH: 1 OF 1

CONTENTS OF THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT
PRIOR NOTICETAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.