


DRAWING MADE IN AMERICAN PROJECTION

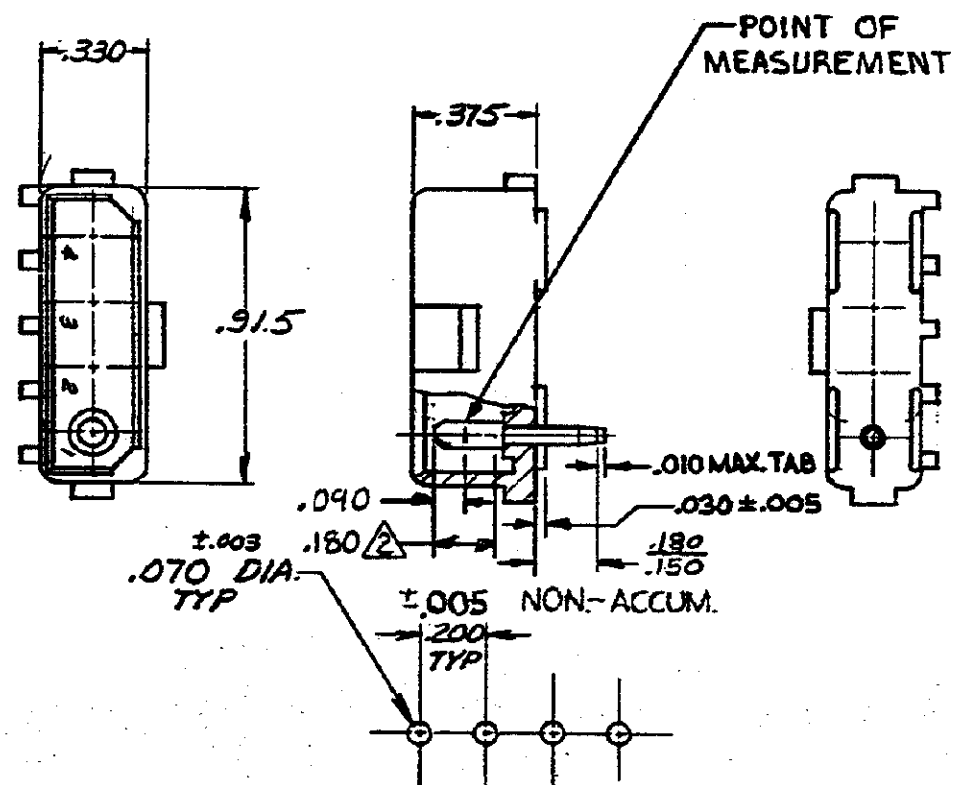

RECOMMENDED LAYOUT FOR
.062 THICK P.C. BOARD

1. PARTS COMPLY WITH TE SOLDERABILITY SPEC. 109-11-3
2. CONTACT IS PLATED OVERALL WITH .000050 NICKEL, THEN .000030 GOLD OVER CONTACT LENGTH INDICATED AND TIN PLATED ON SOLDER TAIL END.

5-350543-2	NYLON - GREEN	COPPER ALLOY - GOLD	2
350543-2	NYLON - NATURAL	COPPER ALLOY - GOLD	2
350543-1	NYLON - NATURAL	COPPER ALLOY PRE-TIN	
ASSEMBLY NO. HSG. MATL & COLOR		PIN MATL & FINISH	
CUSTOMER COPY		REFERENCE ONLY	
DR 9-30-73 G. Eckman		MATERIAL AND FINISH SEE TABLE	
CHK 4/11/73 L.M. Attwood		CLASS .064 DIA. PIN	
DE 4-10-73 J. Hinkle		WIRE - RANGE - INSULATION H - H	
APP 4-10-73 J. Hinkle		TOLERANCE EXCEPT AS NOTED ± .015 ± .015	
		SCALE H	
		LOC CM B	
		NO 350543	
		TYPE POSITIVE LOCK	
		NAME 4 CIRCUIT MATE-N-LOK P.C. BOARD HEADER	

N2	REVISED PER ECR-13-008342	AV	RP	12NOV 2013
N1	REVISED PER ECO-11-005294	RK	HMR	12APR 11
LTR	REVISION RECORD	DR	CHK	DATE

REQUIRED PER ASSEMBLY

DESCRIPTION

NUMBER
350543

WAS P-73-6103

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.