THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	E2	REVISED PER ECO-11-002591	15FEB11	HMR	MM
	E3	REVISED PER ECR-16-009336	07DEC16	GCM	MKO

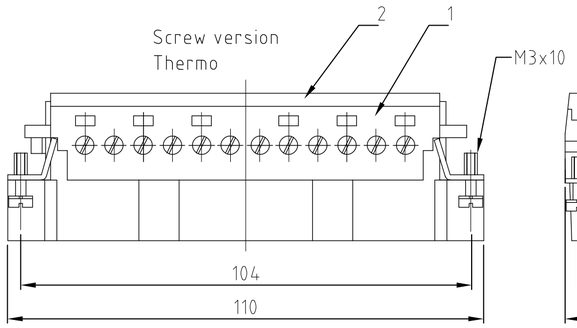



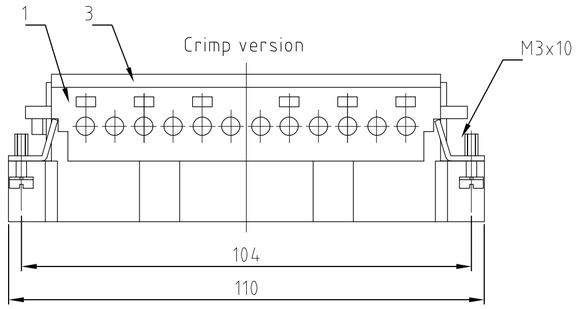

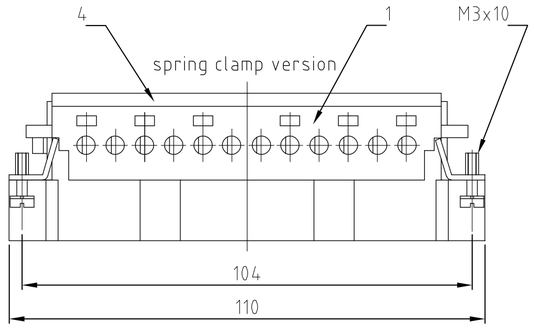

Assembly directions



× Distance for a safe contact max: 21 mm

Contact arrangement view from termination side

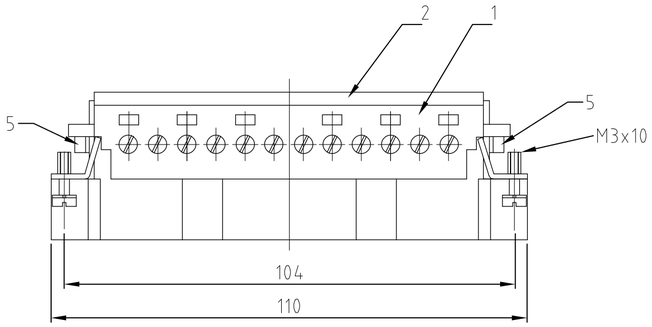

Printing 1-24 Thermo

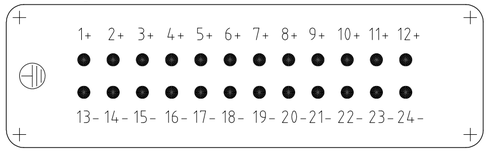

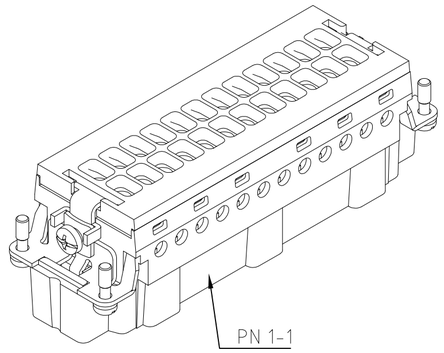

Printing 1-24 Screw

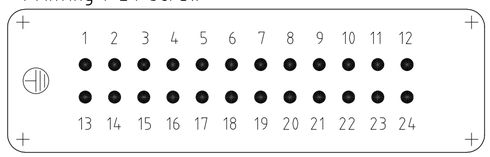

Panel cut-out for contact insert when used without housing

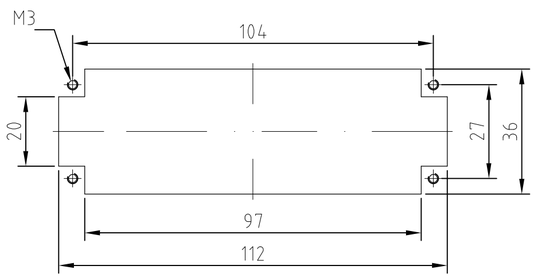

Printing 25-48 Screw

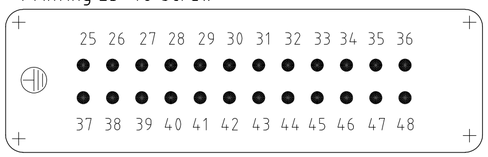

Printing 12+6+6 Screw/Thermo

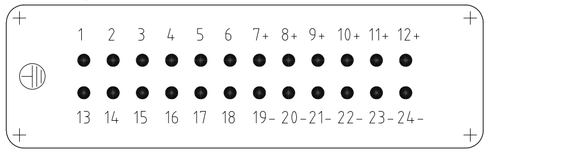

NOTES:

1. SUITABLE CRIMP CONTACTS: SERIES HE/HA
   OUTER DIMENSIONS OF INSULATION: MAX. Ø3,2 MM
2. SUITABLE HOOD SIZE 8; 12: SERIES HB; HD; HIP; EMV
   SUITABLE INSERTION AND EXTRACTION TOOL:
   SCREWDRIVER 0,5x3 DIN 5264
3. Strip lenght: Screw conection 10mm
   Spring clamp conection 10mm Crimp conection 7.5mm
4. STANDARDS:
   DIN EN 61984; DIN EN 60664-1
5. PACKAGING:
   5 SETS IN A CARTON, PRE-MOUNTED
6. SPECIAL PACKAGING: Krauss-Maffei
   PACKAGING UNIT: 220 PIECES