


Features and Benefits

-

Note: Resultant thickness is defined as the final gap thickness of the application.

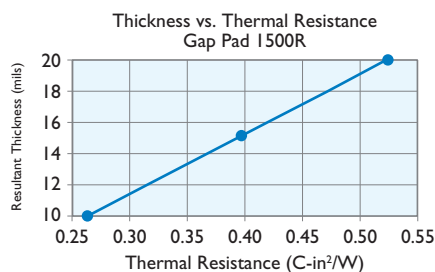

Typical Applications Include:


- Telecommunications
- Computer and peripherals
- Power conversion
- RDRAM™ memory modules / chip scale packages
- Areas where heat needs to be transferred to a frame chassis or other type of heat spreader

Configurations Available:

- Sheet form, die-cut parts, and roll form (converted or unconverted)

Building a Part Number

Standard Options

GPI500R		- 0.020	- .02	- .00	- ACMEI0256 Rev. A		
Section A	Section B	Section C	Section D	Section E	NA = Selected standard option. If not selecting a standard option, insert company name, drawing number, and revision level.		
					0816 = Standard sheet size 8" x 16", or 00 = custom configuration		
			02 = Natural tack, both sides				
		Standard thicknesses available: 0.010", 0.015", 0.020"					
	GPI500R = Gap Pad 1500R Material						

Note: To build a part number, visit our website at www.bergquistcompany.com.