

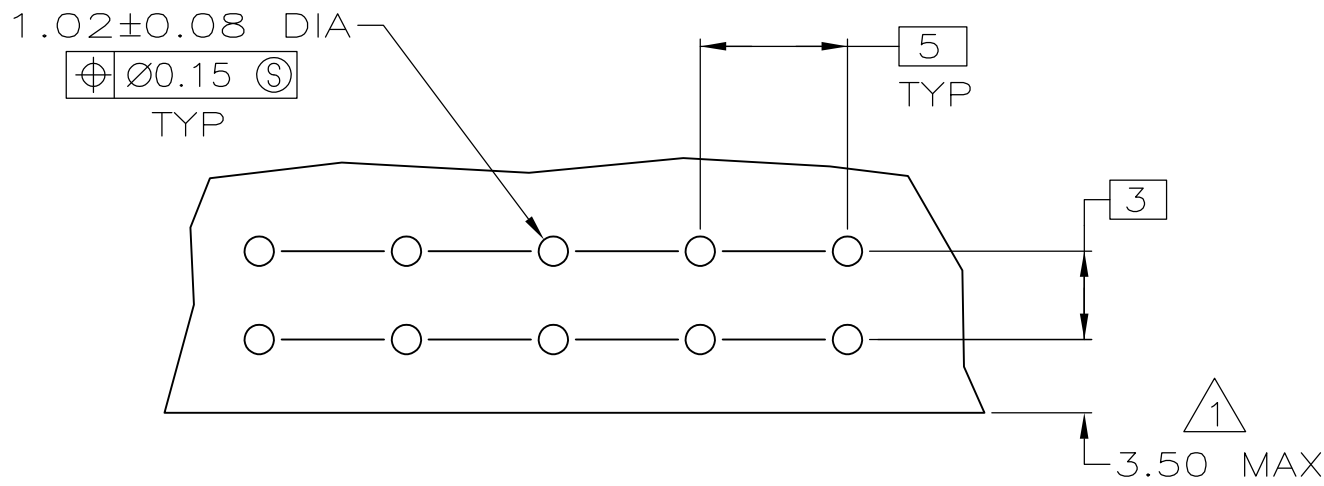
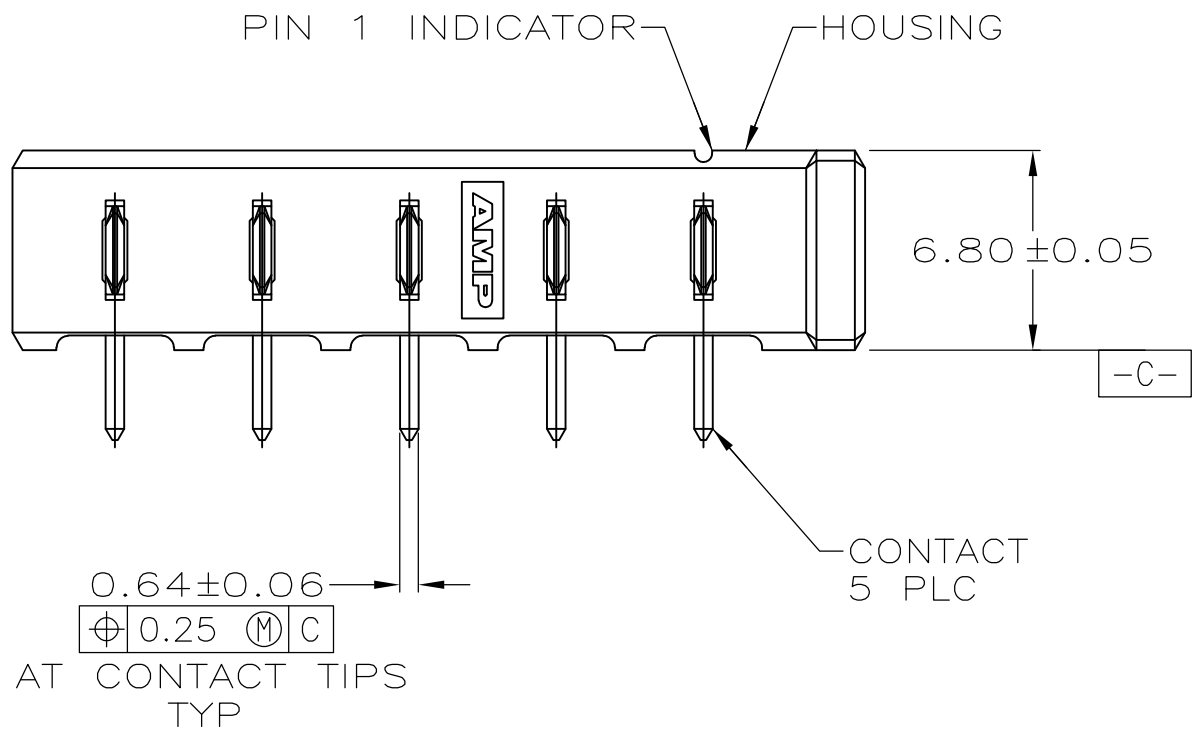


LOC	DIST	P	F	ZONE	LTR	REVISIONS		
						DESCRIPTION	DATE	APPD
ES	00				0	RLSE -1 NPR 5055, WAS 93-1878-131-1	02/17/94	—
					A	REV PER EC0020-346-94	04/14/94	RSK
					B	REV PER EC0020-645-94	07/07/94	RSK
					D	REVISED PER ECR-10-002761	02/09/10	S.Y
					01	REVISED PER ECR-14-009533	07/07/14	JHA

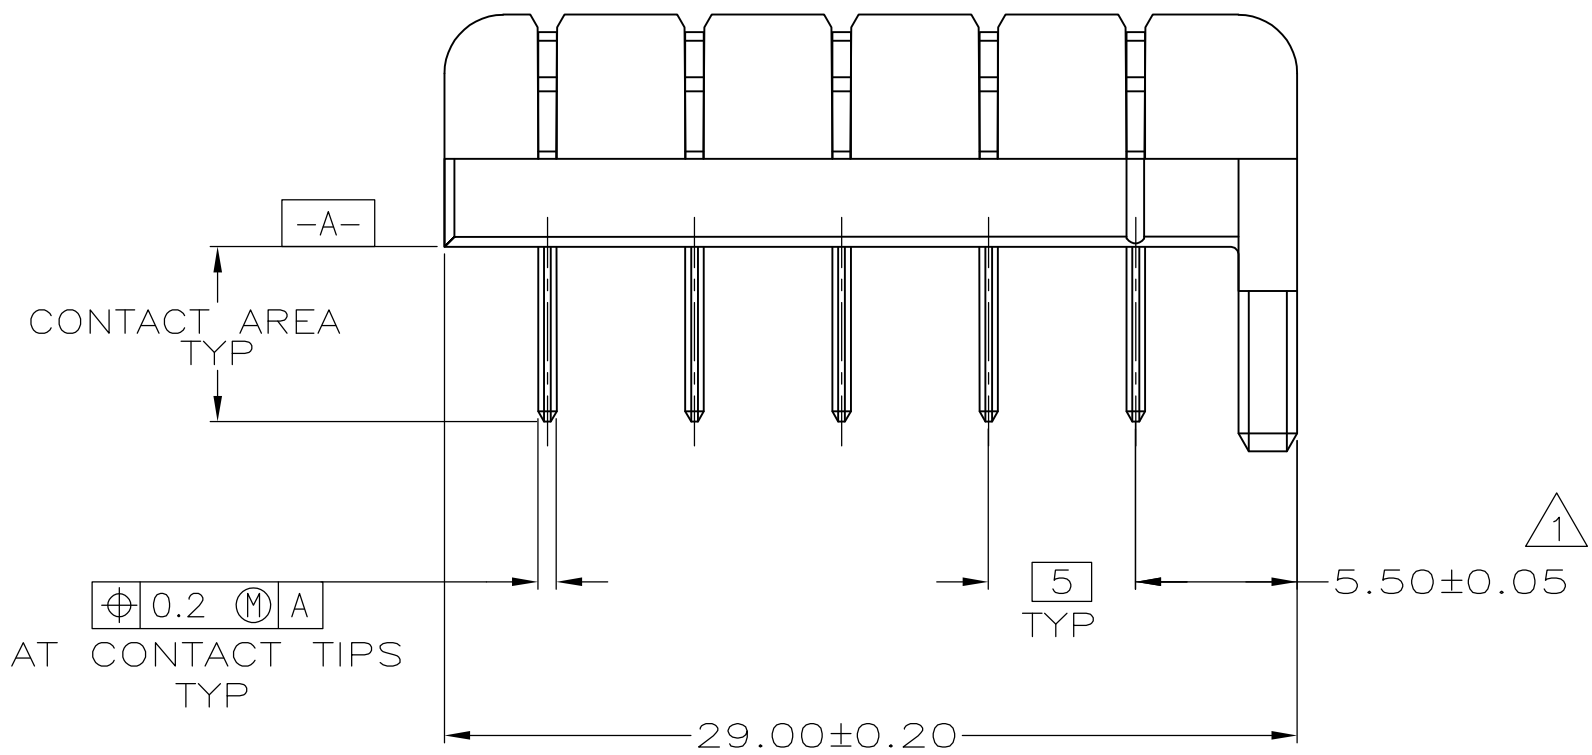


HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

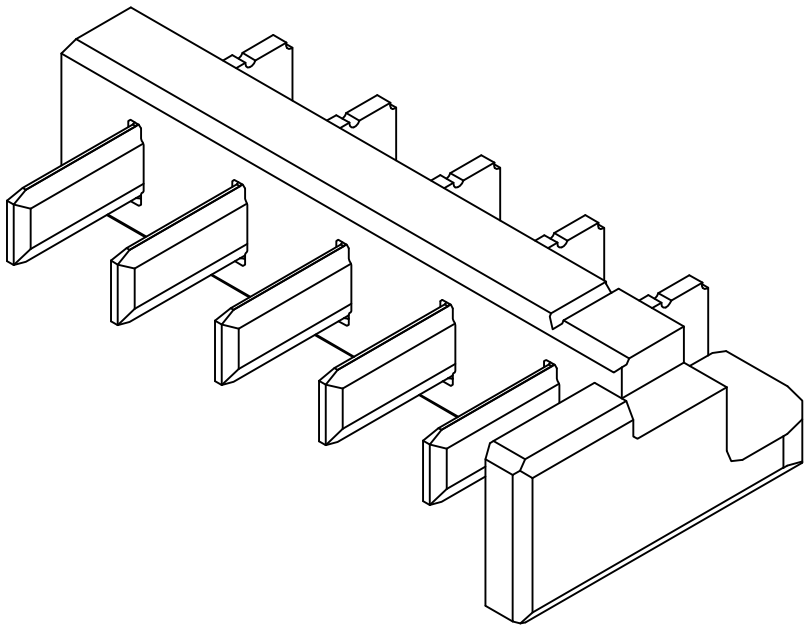

1 COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.

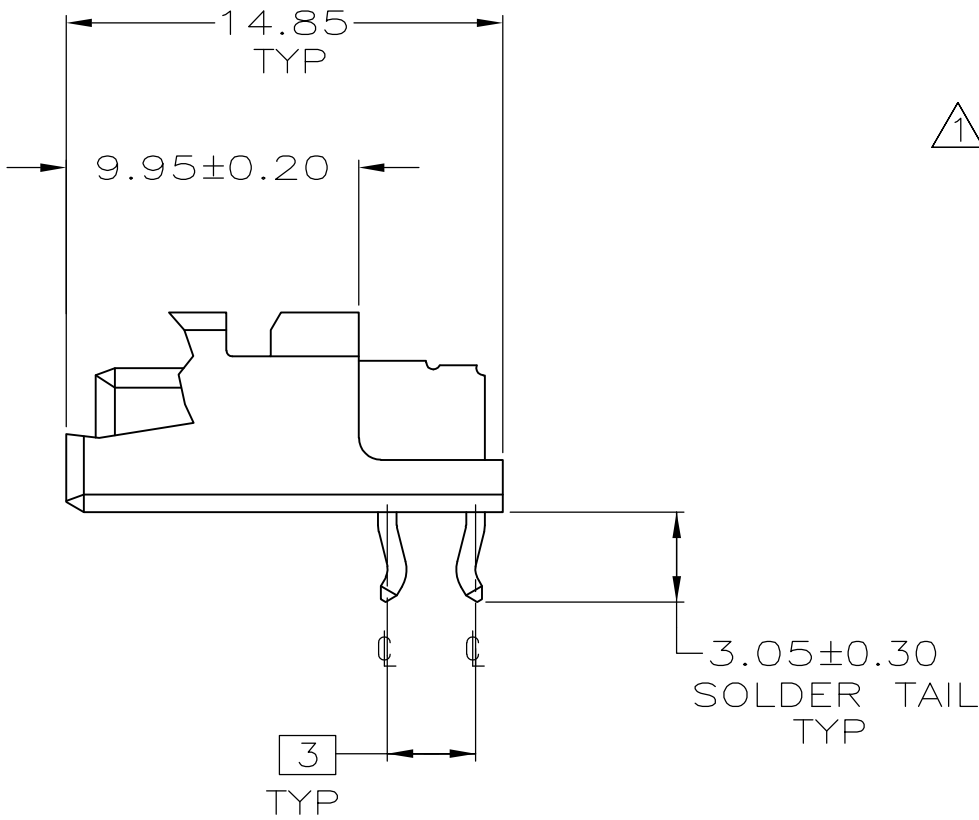

SUPERCEDED BY 5787141-1 787141-1

PART NO		
787141-1		
TE Connectivity		
NAME HEADER ASSEMBLY, RIGHT ANGLE, 5mm ϕ , 5 POSITION, SINGLE KEY, RIGHT VOLTAGE KEY, RETENTIVE SOLDER TAILS, BATTERY INTERCONNECT, 7.2 VOLT		
SIZE CAGE CODE DRAWING NO		
C 00779 C- 787141		
SCALE 4:1 SHEET 1 OF 1		

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm TOLERANCES ON :	DR 11/11/93 G.DOUTY	TE Connectivity
2 PLC DEC ±0.10	CHK 02/17/94 S.KLINE	
3 PLC DEC ± -	APPD 02/17/94 S.KLINE	NAME HEADER ASSEMBLY, RIGHT ANGLE, 5mm ϕ , 5 POSITION, SINGLE KEY, RIGHT VOLTAGE KEY, RETENTIVE SOLDER TAILS, BATTERY INTERCONNECT, 7.2 VOLT
ANGLES ± -	APPD 02/17/94 S.KLINE	
MATERIAL	PRODUCT SPEC	SIZE CAGE CODE DRAWING NO
HOUSING: LCP, BLACK	108-1501	
CONTACTS: BRASS	APPLICATION SPEC	SCALE 4:1 SHEET 1 OF 1
CONTACTS: 2.54 μ m MIN TIN-LEAD ON SOLDER TAIL OVER 1.90 μ m MIN NICKEL ALL OVER	-	
WEIGHT		