

AVC Series

20 Watts

Total Power: 20 Watts
Input Voltage: 3.3V, 5V
of Outputs: Single

Special Features

- Ultra Low Profile - 6.0mm
- POL application
- Efficiency - 93% @ 3.3V
- -40°C to +85°C Operating temperature(Ambient)
- Open Frame SMT
- Low output ripple and noise
- Regulation to zero load
- Pb-free reflow compatible and ROHS compliant



EOV

Electrical Specifications

Input

Input range 2.97 - 3.63VDC for 3.3V
4.5 - 5.5VDC for 5V

Efficiency 93% @ 3.3V_o, 4A

Output

Ripple 50mV p-p for 5V_{in}
40mV p-p for 3.3V_{in}

Output voltage adjust $\pm 10\%$ of $V_{o,nom}$

Isolation Non-Isolated model

Control

Enable ON: On/Off pin open
OFF: On/Off pin connected to GND

Environmental Specifications

Ambient Operating temperature -40°C to +80°C (forced air 0.2m/s)

Storage temperature -45°C to +90°C

Safety


None

Ordering Information

Input Voltage	Output Voltage	Efficiency	Model Number
3.3V	1.0V @ 6A	84% (Typ)	AVC06S04
3.3V	1.2V @ 6A	87% (Typ)	AVC06K04
3.3V	1.5V @ 6A	89% (Typ)	AVC06M04
3.3V	1.8V @ 6A	90% (Typ)	AVC06Y04
3.3V	2.0V @ 6A	92% (Typ)	AVC06D04
3.3V	2.5V @ 6A	93% (Typ)	AVC06G04
5.0V	1.0V @ 6A	82% (Typ)	AVC06S05
5.0V	1.2V @ 6A	84% (Typ)	AVC06K05
5.0V	1.5V @ 6A	86% (Typ)	AVC06M05
5.0V	1.8V @ 6A	88% (Typ)	AVC06Y05
5.0V	2.0V @ 6A	89% (Typ)	AVC06D05
5.0V	2.5V @ 6A	91% (Typ)	AVC06G05
5.0V	3.3V @ 6A	93% (Typ)	AVC06F05

EOL


Pin Assignment

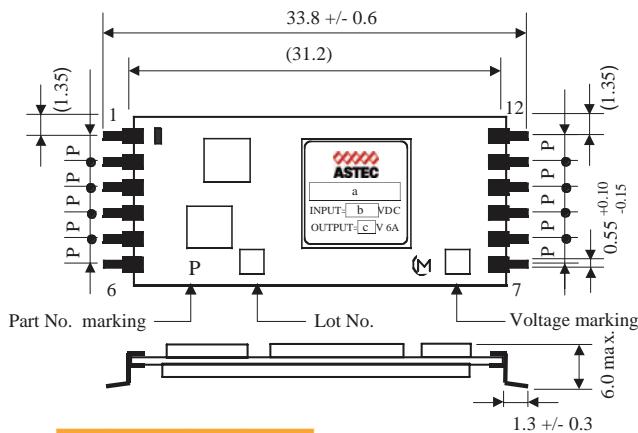

Pin Assignments

Pin No	Symbol	Pin No	Symbol
1	On/Off	7	Gnd
2	Vin	8	Gnd
3	Vin	9	Vout
4	Vin	10	Vout
5	Gnd	11	Vout
6	Gnd	12	Adjust

Note: Astec reserves the right to make changes to the information contained herein without notice and assumes no liability of its use and application.

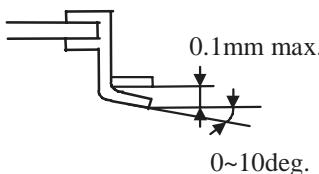

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.Emerson.com/EmbeddedPower
techsupport.embeddedpower@emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- **Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2010 Emerson Electric Co.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Emerson Network Power:](#)

[AVC06M04-L](#)