

**SUPER FAST
GLASS PASSIVATED RECTIFIERS**

REVERSE VOLTAGE - **400** Volts
FORWARD CURRENT - **16** Amperes


FEATURES

- Glass passivated chip
- Superfast switching time for high efficiency
- Low forward voltage drop and high current capability
- Low reverse leakage current
- High surge capacity
- Plastic package has UL flammability classification 94V-0

MECHANICAL DATA

- Case : TO-220AB molded plastic
- Polarity : As marked on the body
- Weight : 0.08 ounces, 2.24 grams
- Mounting position : Any

TO-220AB

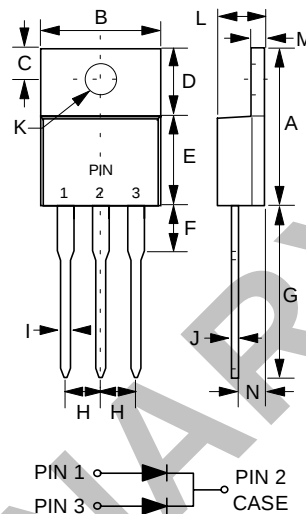

TO-220AB		
DIM.	MIN.	MAX.
A	14.22	15.88
B	9.65	10.67
C	2.54	3.43
D	5.84	6.86
E	8.26	9.28
F	-	6.35
G	12.70	14.73
H	2.29	2.79
I	0.51	1.14
J	0.30	0.64
K	3.53 $\varnothing$	4.09 $\varnothing$
L	3.56	4.83
M	1.14	1.40
N	2.03	2.92

All Dimensions in millimeter

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	STPR1640CT	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	400	V
Maximum RMS Voltage	V_{RMS}	280	V
Maximum DC Blocking Voltage	V_{DC}	400	V
Maximum Average Forward Rectified Current @T _C =120°C	$I_{(AV)}$	16	A
Non Repetitive Peak Forward Surge Current Per Diode Sinusoidal (JEDEC Method) T _P =10ms T _P =8.3ms	I_{FSM}	80 90	A
Maximum forward Voltage Pulse Width =300us I _F =16A @T _J =25°C Duty cycle	V_F	1.5	V
Maximum DC Reverse Current at Rated DC Blocking Voltage @T _J =100°C	I_R	5 500	uA
Typical Junction Capacitance per element (Note 1)	C_J	80	pF
Maximum Reverse Recovery Time (Note 2)	T_{RR}	35	ns
Typical Thermal Resistance	$R_{\theta JC}$	3.0	°C/W
Operating and Storage Temperature Range	T _J ,T _{STG}	-55 to +150	°C

NOTES : 1.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
2.Reverse Recovery Test Conditions:I_F=0.5A,I_R=1.0A,I_{RR} 0.25A.

REV. 2-PRE, 13-Sep-2001, KTGC07

FIG.1 - FORWARD CURRENT DERATING CURVE

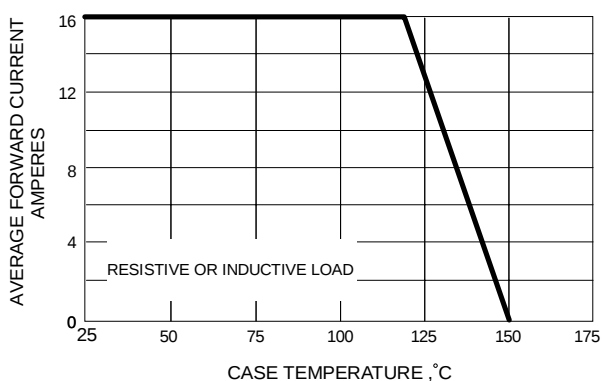


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

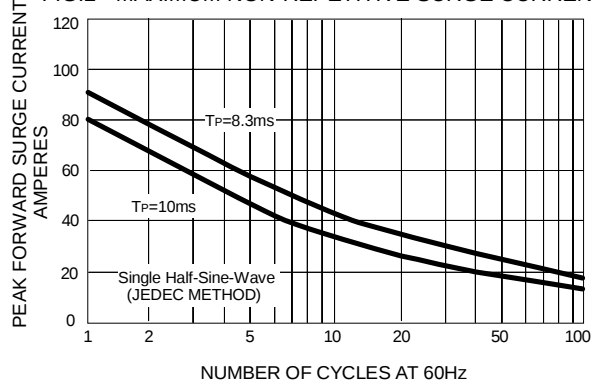


FIG.3 - TYPICAL REVERSE CHARACTERISTICS

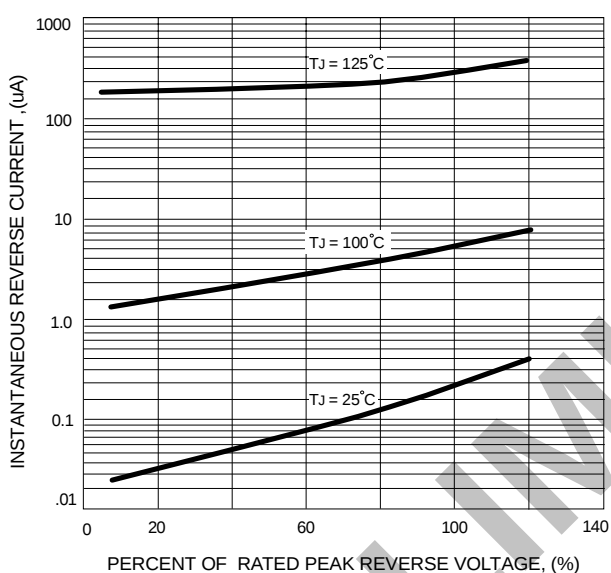


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

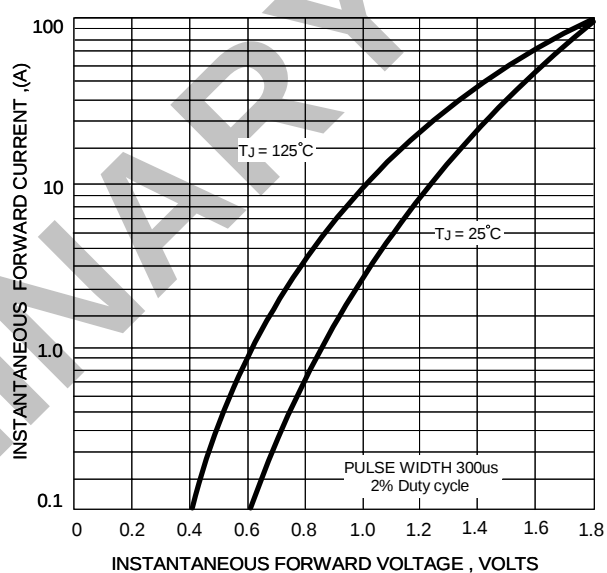


FIG.5 - TYPICAL JUNCTION CAPACITANCE

