

TECHNICAL DATA
DATA SHEET 1101, REV. A**DC-DC Converters****Fixed Input, 3000V Isolation, Unregulated, Single Output****FEATURES:**

- Isolation Voltage: 3000Vdc
- Isolation Resistance (1): 1000M Ω
- Short-Circuit Duration: 1 second
- Case Temperature Rise: Max. 25°C, Typ. 15°C
- Cooling Method: Free-Air Cooling
- Standby Power Dissipation: 1W (100mW), 2W (200mW)
- Operating Temp.: -40°C ~ + 85°C
- Storage Temp.: -55°C ~ + 125°C
- Humidity: $\leq 95\%$
- Soldering Temp. (2): 300°C
- Case Material: Non-Flammable Material (UL94-V0)
- Mean Time Before Failure: > 1,000,000 hours (Operating Temp. 25°C)

B Single Output-1W/2W Series Input Characteristics

Part Number	Nominal Input Voltage	Input Voltage Range	Maximum Input Voltage*
B05XXHS/D1/2U	5Vdc	4.5~5.5Vdc	7Vdc
B12XXHS/D1/2U	12Vdc	10.8~13.2Vdc	15Vdc
B24XXHS/D1/2U	24Vdc	21.6~26.4Vdc	28Vdc

* Voltage above this value may cause permanent damage to the device.

B Single Output-1W/2W Series Output Characteristics

Parameter	MIN	TYP	MAX	Units
1W Output Power	0.25		1	W
2W Output Power	0.5		2	W
Line Regulation			± 1.2	%
Efficiency at 100% Load	65	75	85	%
Temperature Coefficient			0.03	%/°C
1W Ripple and Noise		50	75	mVp-p
2W Ripple and Noise		85	150	
Switching Frequency	80	100	150	kHz



1. All specifications at T_A=25°C, 75% of the humidity, Nominal input voltage, full output load unless otherwise specified.
2. Soldering for 10 seconds at 1.5mm away from the edge.

TECHNICAL DATA
DATA SHEET 1101, REV. A

B Single Output-1W/2W Series Part Number List

Input	Output	Power	SIP-1W	SIP-2W	DIP-1W	DIP-2W
5Vdc	5V/200m A	1.00W	B0505HS1U	B0505HS2U	B0505HD1U	B0505HD2U
	9V/111m A	1.00W	B0509HS1U	B0509HS2U	B0509HD1U	B0509HD2U
	12V/84m A	1.00W	B0512HS1U	B0512HS2U	B0512HD1U	B0512HD2U
	15V/67m A	1.00W	B0515HS1U	B0515HS2U	B0515HD1U	B0515HD2U
12Vdc	5V/400m A	2.00W	B1205HS1U	B1205HS2U	B1205HD1U	B1205HD2U
	9V/222m A	2.00W	B1209HS1U	B1209HS2U	B1209HD1U	B1209HD2U
	12V/167m A	2.00W	B1212HS1U	B1212HS2U	B1212HD1U	B1212HD2U
	15V/133m A	2.00W	B1215HS1U	B1215HS2U	B1215HD1U	B1215HD2U
24Vdc	5V/400m A	2.00W	B2405HS1U	B2405HS2U	B2405HD1U	B2405HD2U
	9V/222m A	2.00W	B2409HS1U	B2409HS2U	B2409HD1U	B2409HD2U
	12V/167m A	2.00W	B2412HS1U	B2412HS2U	B2412HD1U	B2412HD2U
	15V/133m A	2.00W	B2415HS1U	B2415HS2U	B2415HD1U	B2415HD2U


PIN CONFIGURATION

BxxyyHS1/2U PACKAGE DIMENSIONS	BxxyyHD1/2U PACKAGE DIMENSIONS
	 (Top View)


TECHNICAL DATA
DATA SHEET 1101, REV. A

Mechanical Dimension: mm


BxxyyHS1/2U PACKAGE DIMENTIONS

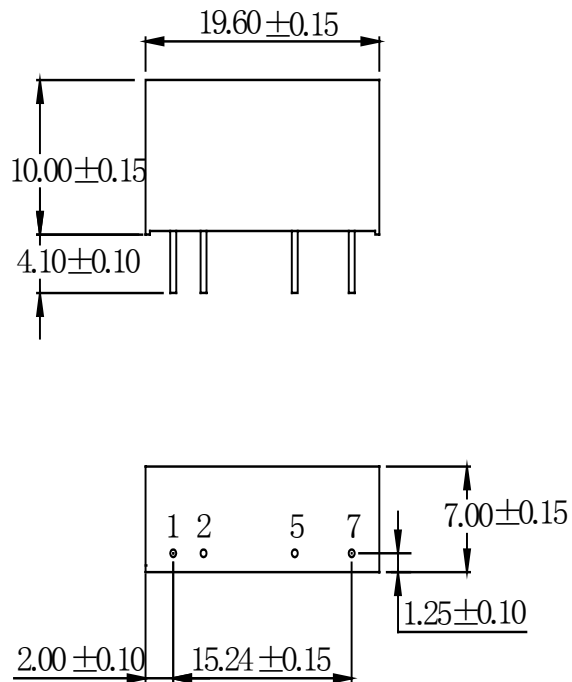


BxxyyHD1/2U PACKAGE DIMENTIONS

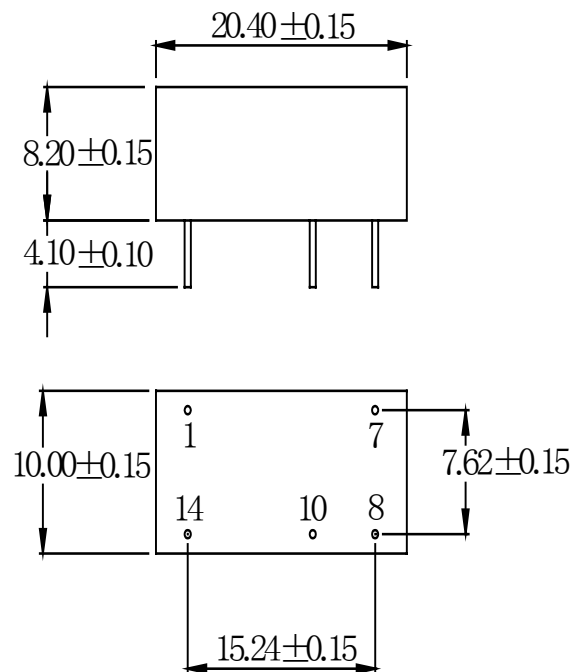

DIMENSIONAL RECOMMENDATIONS FOR PCB LAYOUT



SIP PACKAGE DIMENSIONS



DIP PACKAGE DIMENSIONS

TECHNICAL DATA
DATA SHEET 1101, REV. A**APPLICATION NOTE****Filtering**

In some circuits which are sensitive to noise and ripple, a filtering capacitor may be added to the DC/DC output end and input end to reduce the noise and ripple. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees the external capacitor table. To get an extremely low ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, which may produce a more significant filtering effect. It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference (see figure 1).

Requirement On Output Load


To ensure this module can operate efficiently and reliably, a minimum load is specified for this kind of DC/DC converter in addition to a maximum load (namely full load). During operation, make sure the specified range of input voltage is not exceeded, the minimum output load is **not less than 10%** of the full load, and that this product should never be operated under no load! If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power.

Overload Protection


Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (see Figure 2).

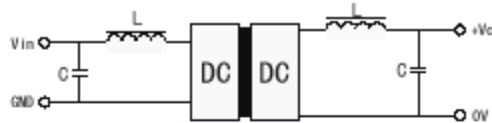BxxyyHS/D1/2U

<Figure 1>

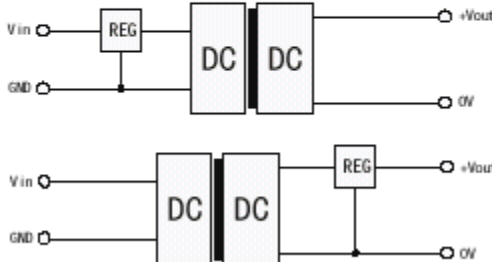

<Figure 2>

External Capacitor Table

V_{in}	External capacitor	V_{out}	External capacitor
5 VDC	4.7 μ F	5 VDC	10 μ F
12 VDC	2.2 μ F	9 VDC	4.7 μ F
24 VDC	1 μ F	12 VDC	2.2 μ F
-	-	15 VDC	1 μ F

TECHNICAL DATA
DATA SHEET 1101, REV. A

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.